

6427525 N E C ELECTRONICS INC

05E 23088 D

**BIPOLAR ANALOG INTEGRATED CIRCUIT**

**$\mu$ PC1470H**

**MOTOR SPEED REGULATORS**

T-77-21


**DESCRIPTION**

The  $\mu$ PC1470H is a monolithic integrated circuit intended as speed regulators for DC motors of record players, tape and cassette recorders etc. The device is packaged in a new developed 4-lead quase-TO-126 plastic case.

**FEATURES**


- Excellent versatility in use.
- High Output current.
- Low Quiescent current.
- Low Reference voltage.
- Excellent parameters stability versus temperature.
- Excellent characteristic at low supply voltage.

**PACKAGE DIMENSIONS (Unit: mm)**

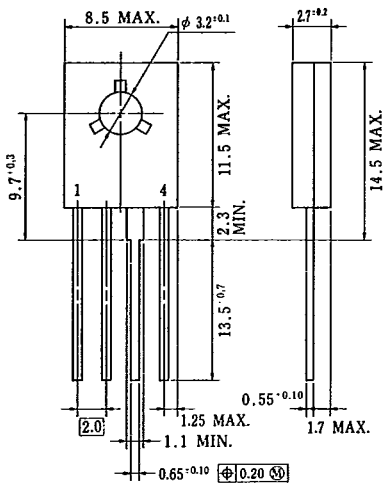

PAHP-200B

**BLOCK DIAGRAM**

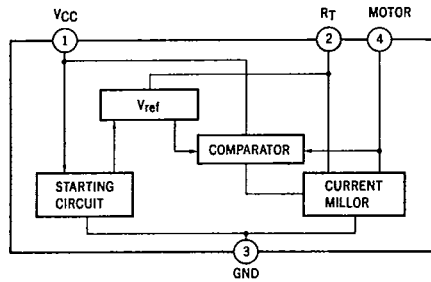

6427525 N E C ELECTRONICS INC

$\mu$ PC1470H  
05E 23089 D

T-77-21

ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C)

Supply Voltage	V <sub>CC</sub>	18	V
Circuit Current	I <sub>4</sub>	2*	A
Package Dissipation	P <sub>D</sub>	1.2	W
Operating Temperature	T <sub>opt</sub>	-20 to +75	°C
Storage Temperature	T <sub>stg</sub>	-40 to +150	°C

\*t ≤ 5s

RECOMMENDED OPERATING CONDITION

Supply Voltage Range	V <sub>CC</sub>	3.5 to 16	V
----------------------	-----------------	-----------	---

ELECTRICAL CHARACTERISTICS (Ta = 25 °C, V<sub>CC</sub> = 12 V)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS*
Reference Voltage	V <sub>ref</sub>	1.10	1.27	1.40	V	I <sub>4</sub> = 10 mA Fig. 1
Quiescent Current	I <sub>d</sub>	0.5	0.8	1.2	mA	R <sub>M</sub> = 180 Ω Fig. 4
Reflection Coefficient	k	18	20	22		R <sub>M1</sub> = 44 Ω, R <sub>M2</sub> = 33 Ω Fig. 2
Saturation Voltage	V <sub>4</sub> (sat)		1.5	2.0	V	V <sub>CC</sub> = 4.2 V, R <sub>M</sub> = 4.4 Ω Fig. 3
	$\frac{\Delta k}{k} / \Delta V_{CC}$		0.4		%/V	I <sub>4</sub> = 100 mA, V <sub>CC</sub> = 6.3 ~ 16 V Fig. 2
Line Regulation	$\frac{\Delta V_{ref}}{V_{ref}} / \Delta V_{CC}$		0.06		%/V	I <sub>4</sub> = 100 mA, V <sub>CC</sub> = 6.3 ~ 16 V Fig. 1
	$\frac{\Delta k}{k} / \Delta I_M$		-0.02		%/mA	I <sub>4</sub> = 30 ~ 200 mA Fig. 2
Load Regulation	$\frac{\Delta V_{ref}}{V_{ref}} / \Delta I_M$		-0.02		%/mA	I <sub>4</sub> = 30 ~ 200 mA Fig. 1
	$\frac{\Delta k}{k} / \Delta T_a$		0.01		%/°C	I <sub>4</sub> = 100 mA, Ta = -20 ~ +75 °C Fig. 2
Temperature Coefficient	$\frac{\Delta V_{ref}}{V_{ref}} / \Delta T_a$		0.01		%/°C	I <sub>4</sub> = 100 mA, Ta = -20 ~ +75 °C Fig. 1

\* Pulse Test : PW ≤ 10 ms, Duty Cycle ≤ 2 %

TEST CIRCUIT

Fig. 1

$$\left( V_{ref}, \frac{\Delta V_{ref}}{V_{ref}} / \Delta V_{CC}, \frac{\Delta V_{ref}}{V_{ref}} / \Delta I_4, \frac{\Delta V_{ref}}{V_{ref}} / \Delta T_a \right)$$





Fig. 2

$$\left( k, \frac{\Delta k}{k} / \Delta V_{CC}, \frac{\Delta k}{k} / \Delta I_4, \frac{\Delta k}{k} / \Delta T_a \right)$$



$$K = \frac{I_4 (SW \textcircled{2}) - I_4 (SW \textcircled{1})}{I_2 (SW \textcircled{2}) - I_2 (SW \textcircled{1})}$$

5

**μPC1470H**  
6427525 N E C ELECTRONICS INC

05E 23090 D

**T-77-21**

Fig. 3






fig. 4



**APPLICATION INFORMATION**

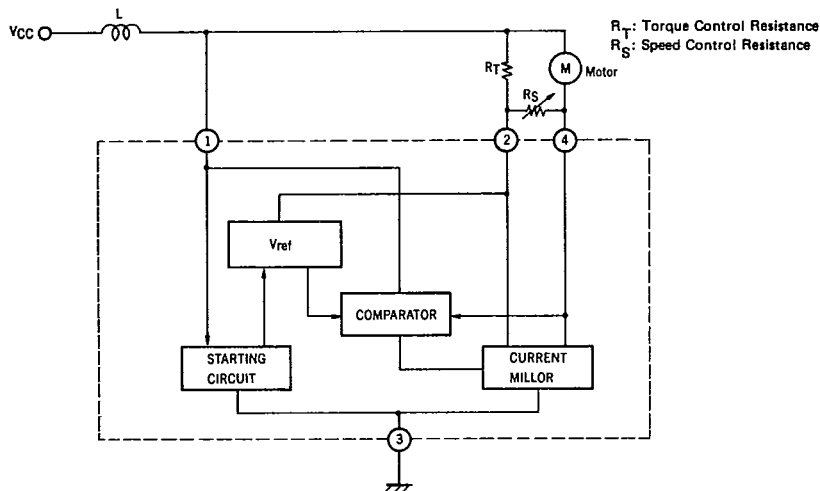

**[BASIC EQUATION FOR THE MOTOR]**

$$\begin{cases} E_t = V_{ref} + R_T (i_2 + \frac{V_{ref}}{R_S}) \\ i_2 = \frac{1}{K} i_4 + i_q \\ i_4 = i_m + \frac{V_{ref}}{R_S} \end{cases}$$


$$E_t = V_{ref} + R_T (\frac{1}{K} i_4 + i_q + \frac{V_{ref}}{R_S})$$

$$E_t = V_{ref} + R_T \left\{ \frac{1}{K} (i_m + \frac{V_{ref}}{R_S}) + i_q + \frac{V_{ref}}{R_S} \right\}$$

$$E_t = V_{ref} \left\{ 1 + \frac{R_T}{R_S} (1 + \frac{1}{K}) \right\} + R_T i_q + \frac{R_T}{K} i_m$$

They also give:  $E_m = E_o + R_m i_m$

$$\begin{cases} E_o = V_{ref} \left\{ 1 + \frac{R_T}{R_S} (1 + \frac{1}{K}) \right\} + R_T i_q \\ R_m = \frac{R_T}{K} \end{cases}$$




$E_o$ : Back Electromotive Force  
 $R_m$ : Internal Resistance (of the Motor)  
 $K$ : Reflection Coefficient ( $= I_4/I_2$ )

6427525 N E C ELECTRONICS INC

$\mu$ PC1470H  
05E 23091 D

T-77-21

APPLICATION CIRCUIT

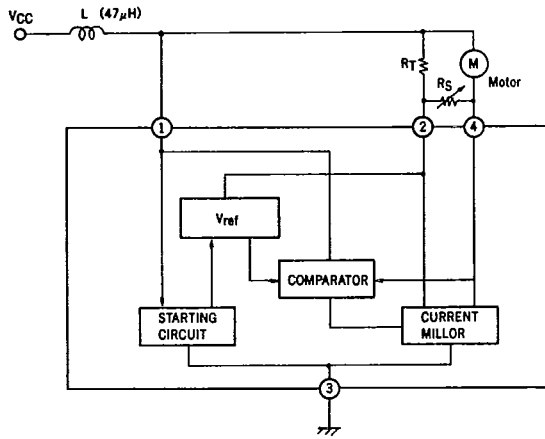

- VCC = 12 V
- Rm = 19.5 Ω
- RT = 330 Ω
- RS = 1 kΩ
- Eo = 2.3 V
- K = 20

Note 1. The motor speed can be adjusted by the variable resistor RS.

$$R_{Smin} = \frac{V_{ref} \cdot R_T}{E_o - V_{ref} - I_q \cdot R_T}$$

Note 2. If  $R_T \max. > K \cdot R_m \min.$  instability of the motor may occur.

5