
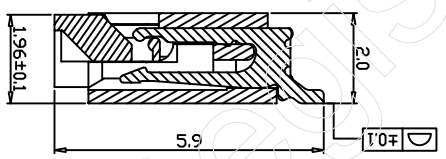
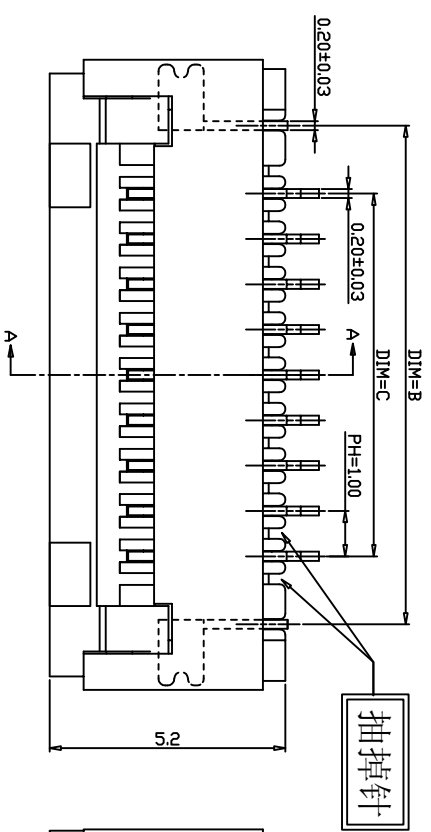


Electrical Characteristics:
 Current rating: 0.5A AC/DC
 Voltage rating: 50V AC/DC
 Temperature range: -25°C~+85°C
 Withstand Voltage: 500V AC/Minu
 Contact Resistance: ≤ 20mΩ
 Insulation resistance: ≥ 800mΩ
 Relative Humidity: 93%+40°C

Material Description:
 Contact: Phosphor Bronze Tin-Le
 Solder Tab: Phosphor Bronze Tin-1
 Housing: Thermoplastic(UL94V-0)
 Slider: Thermoplastic(UL94V-0)

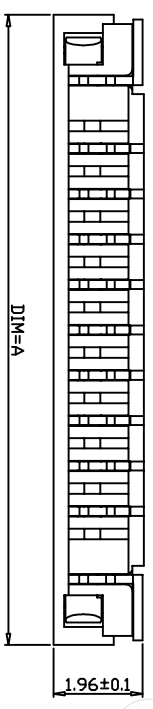

SECTION A-A

Pin数	DIM=A	DIM=B	DIM=C	DIM=D
30P	34.9	32.00	29.00	31.10
29P	33.9	31.00	28.00	30.10
28P	32.9	30.00	27.00	29.10
27P	31.9	29.00	26.00	28.10
26P	30.9	28.00	25.00	27.10
25P	29.9	27.00	24.00	26.10
24P	28.9	26.00	23.00	25.10
23P	27.9	25.00	22.00	24.10
22P	26.9	24.00	21.00	23.10
21P	25.9	23.00	20.00	22.10
20P	24.9	22.00	19.00	21.10
19P	23.9	21.00	18.00	20.10
18P	22.9	20.00	17.00	19.10
17P	21.9	19.00	16.00	18.10
16P	20.9	18.00	15.00	17.10
15P	19.9	17.00	14.00	16.10
14P	18.9	16.00	13.00	15.10
13P	17.9	15.00	12.00	14.10
12P	16.9	14.00	11.00	13.10
11P	15.9	13.00	10.00	12.10
10P	14.9	12.00	9.00	11.10
9P	13.9	11.00	8.00	10.10
8P	12.9	10.00	7.00	9.10
7P	11.9	9.00	6.00	8.10
6P	10.9	8.00	5.00	7.10
5P	9.9	7.00	4.00	6.10
4P	8.9	6.00	3.00	5.10
3P	7.9	5.00	2.00	4.10
2P	6.9	4.00	1.00	3.10

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	APPROVED	DATE	PART NO	1. OK-DX-nPWB
△ ±0.15	CHECKED	DATE	DRAWING NO	JUSHUO
△ ±0.05	DRAWN	DATE	COMPUTER NO	
△ X.XXX	物料	2004.6.16	SCALE	1:1
△ ANG.	NUMBER	81	SIZE	A3
△ UNIT			NAME	
MM				REV A
SER AREA	REVISIONS	CHK	DATE	