

AN2050FB


CCD Monochrome Video Camera Signal Processor IC

Overview


The AN2050FB is an integrated circuit specified to the monochrome CCD image element which is employed in the monitoring video cameras, door phones, TV telephone sets, etc. The high frequency block and power block that are composed of 3-chip of DS signal processing, AGC, Γ compensating and NTSC output so far, are integrated into one chip to offer low cost.

Features

- Frequency characteristics: 10MHz (incompatible with the CCD image element of 330,000 pixels)
- AGC range: 18dB (improved SN ratio)
- Operating supply voltage range: 4.5V to 5.3V (typ. 5V)
- Power consumption: typ. 225mW

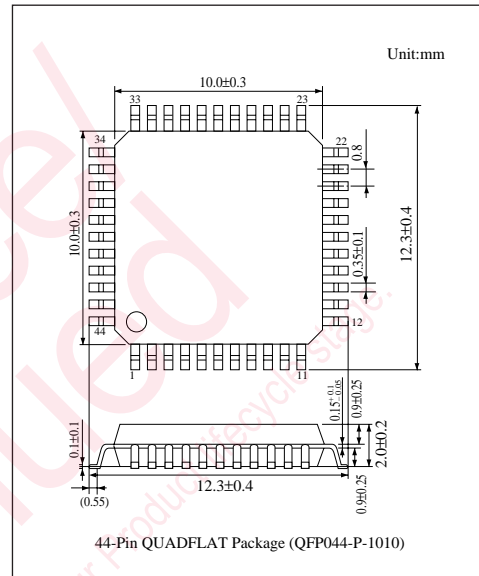

Block Diagram

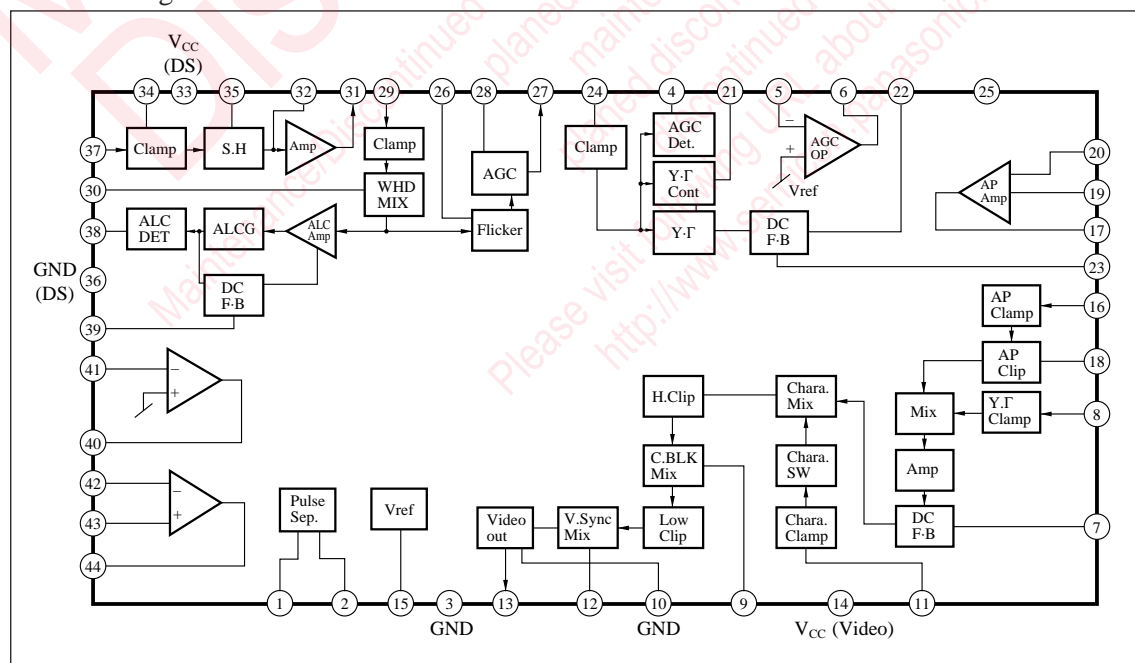

■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V _{CC}	5.5	V
Supply current	I _{CC}	54	mA
Power dissipation	P _D	280	mW
Operating ambient temperature	T _{opr}	−20 to +75	°C
Storage temperature	T _{stg}	−55 to +125	°C


■ Recommended Operating Range (Ta=25°C)

Parameter	Symbol	Range
Operating supply voltage range	V _{CC}	4.5V to 5.3V

■ Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	min	typ	max	Unit
OB control (1)	V _{OB1}	V _{CC} =5V	35	55	75	mV _{PP}
OB control (2)	V _{OB2}	V _{CC} =5V	−85	−65	−45	mV _{PP}
AGC amp gain (1)	G _{AGC1}	V _{CC} =5V	130	170	210	mV _{PP}
AGC amp gain (2)	G _{AGC2}	V _{CC} =5V	16	19	22	dB
ALC DET output	V _{ALC}	V _{CC} =5V	500	600	700	mV _{PP}
Γ circuit gain (1)	GΓ ₁	V _{CC} =5V	660	800	940	mV _{PP}
Γ circuit gain (2)	GΓ ₂	V _{CC} =5V	—	—	550	mV _{PP}
AGC DET output	V _{AGC/DET}	V _{CC} =5V	400	480	560	mV _{PP}
AP clip (1)	G _{CL1}	V _{CC} =5V	0.9	1.1	1.4	V _{PP}
AP clip (2)	G _{CL2}	V _{CC} =5V	—	—	−10	dB
YΓ amp gain	G _{YΓ}	V _{CC} =5V	1.1	1.3	1.5	V _{PP}
Supply current (1)	I ₂₅	V _{CC} =5V	26.5	31	35.5	mA
Supply current (2)	I ₃₃	V _{CC} =5V	9.5	14	18.5	mA
CP1 pulse separation level	V _{CP1}	V _{CC} =5V	3.4	3.8	4.2	V
WHD pulse separation level	V _{WHD}	V _{CC} =5V	2.15	2.55	2.95	V
WBL pulse separation level	V _{WBL}	V _{CC} =5V	0.4	0.8	1.2	V
CP2 pulse separation level	V _{CP2}	V _{CC} =5V	3.1	3.5	3.9	V
BLK pulse separation level	V _{BLK}	V _{CC} =5V	0.6	1	1.4	V

■ Application Circuit

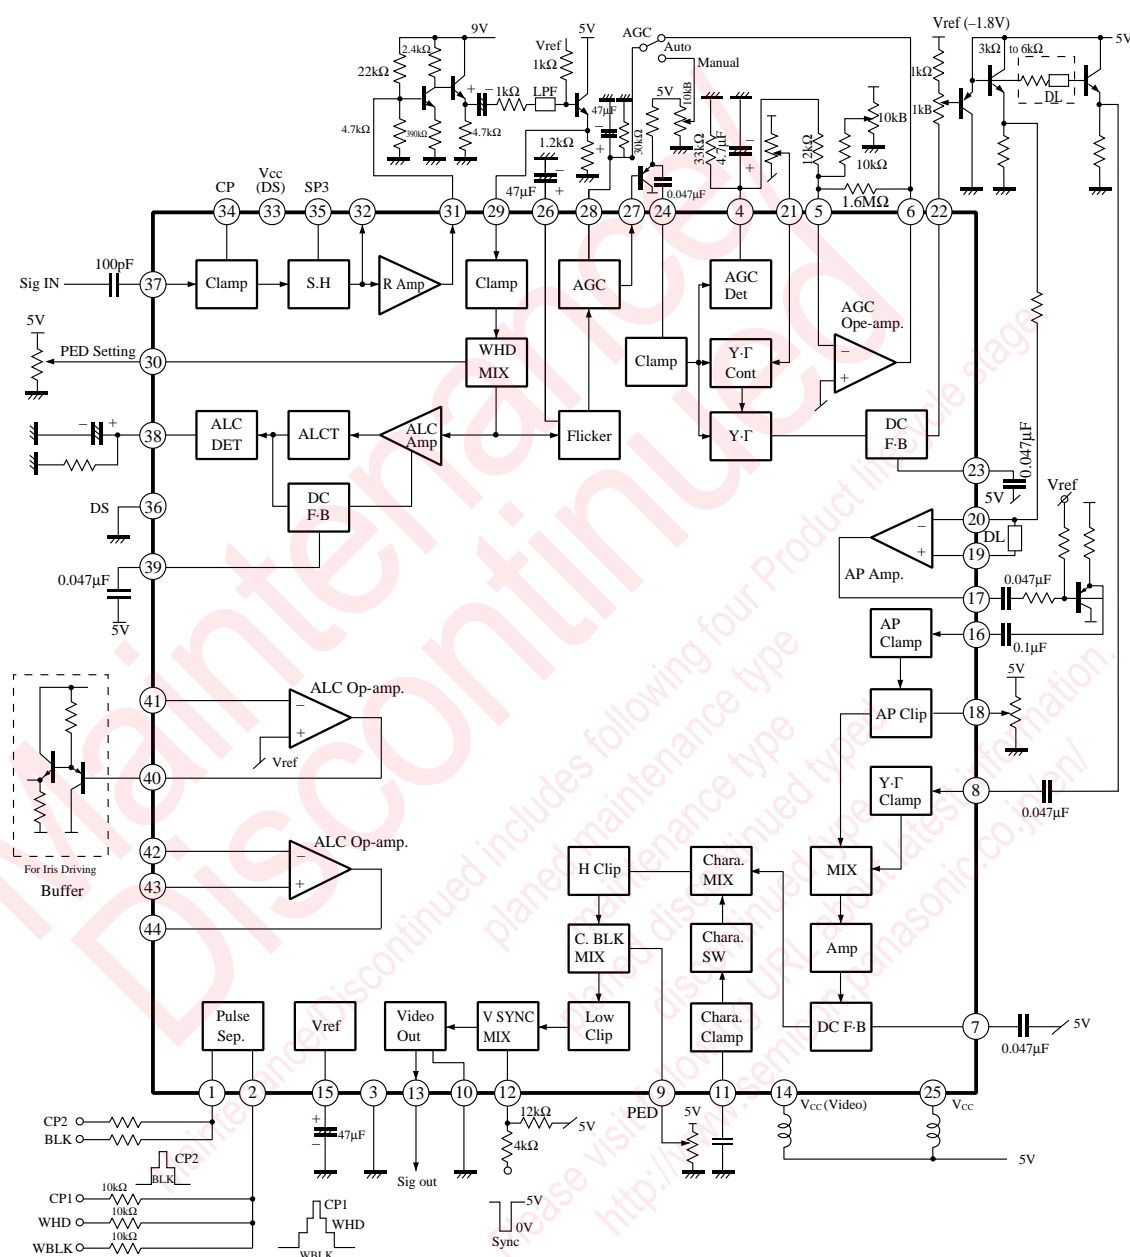

Pin Descriptions

Pin No.	Pin name	Typ. waveform	Pin No.	Pin name	Typ. waveform
1	Pulse input 1		23	DC control	
2	Pulse input 2		24	γ input	
3	GND		25	V _{CC}	
4	AGC DET		26	Flicker control	Open 1.8V
5	AGC op. amp. input –		27	AGC output	
6	AGC op. amp. output		28	AGC control	
7	DC control		29	AGC input	
8	Y γ input		30	PED setting	
9	PED		31	DS amp. output	
10	GND		32	DC output	
11	Character input		33	V _{CC} (DS)	
12	SYNC input		34	Clamp pulse input	
13	Video output		35	Sample hold pulse input	
14	V _{CC} (Video)		36	GND (DS)	
15	V _{ref}		37	DS input	
16	Aperture input		38	ALC DET	
17	Aperture amp. output		39	DC control	
18	Aperture clip		40	ALC op. amp. output	
19	Aperture amp. input +		41	ALC op. amp. input –	
20	Aperture amp. input –		42	ALC op. amp. input –	
21	γ control		43	ALC op. amp. input +	
22	γ output		44	ALC op. amp. output	

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - ☐ Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.