
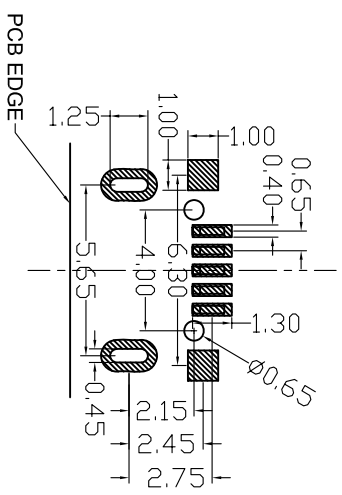
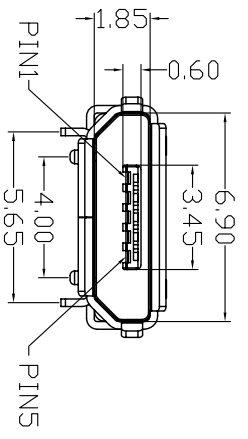
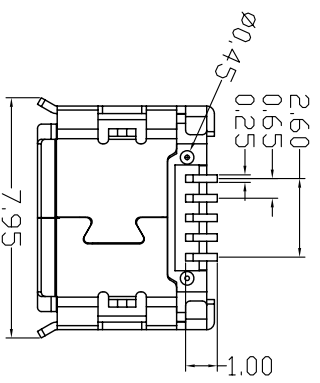




| REV. | DESCRIPTION | DRAWN/DATE | APPROVED/DATE |
|------|-------------|------------|---------------|
| | | | |

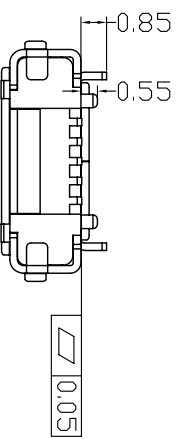

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC FLAMMABILITY RATING UL94-0
 - 1.2 CONTACT: COPPERY ALLOY T=0.15MM
 - 1.3 SHELL: COPPERY ALLOY T=0.25MM
2. FINISH:
 - 2.1 CONTACT: 1U"MIN, PLATED ON CONTACT AREA G/F PLATING ON SOLDER TAIL AREA 50~80U" NICKEL UNDERPLATING OVERALL
 - 2.2 SHELL: 80~120U" MATTER TIN PLATING ALL 50~80U" NICKEL UNDERPLATING OVERALL
3. SPECIFICATION:
 - 3.3 CURRENT RATING: 0.5A(2.3.4CONTACT)/1.8A (1.5CONTACT)MAX.
 - 3.2 VOLTAGE: 30 VAC
 - 3.3 TEMPERATURE RANGE: -30°C~85°C
 - 3.4 CONTACT RESISTANCE: 30 MILLIONHM MAX.
 - 3.5 DIELECTRIC WITHSTANDING VOLTAGE: 250VAC R.M.S
 - 3.6 INSULATION RESISTANCE: 100 MEGOHMS MIN

| GENERAL TOLERANCE | ANGLE TOLERANCE | DESIGN | DATE |
|-------------------|-----------------|-----------------------------|------------|
| X. ±0.35 | X. ±2.0° | Z01. | 2016/04/15 |
| .X. ±0.25 | .X. ±1.0° | CHECK | DATE |
| .XX ±0.15 | .XX ±0.5° | APPRO. | DATE |
| .XXX ±0.10 | | | |
| UNIT: mm | SCALE 1:1 | | |
| A4 | SHEET: 1 of 1 | | |
| FILE NAME (品名) | | MICRO USB 5PIN 5.65前插后贴(卷口) | |
| PART NO(料号) | | | |
| DRAWING NO(图号) | | | |
| | | REV. A0 | |