


VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2013-4-10

INTERFACE:	
1	VSS
2	VDD(5V)
3	VO
4	RS(GS)
5	R/W(SID)
6	E(SCLK)
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-K

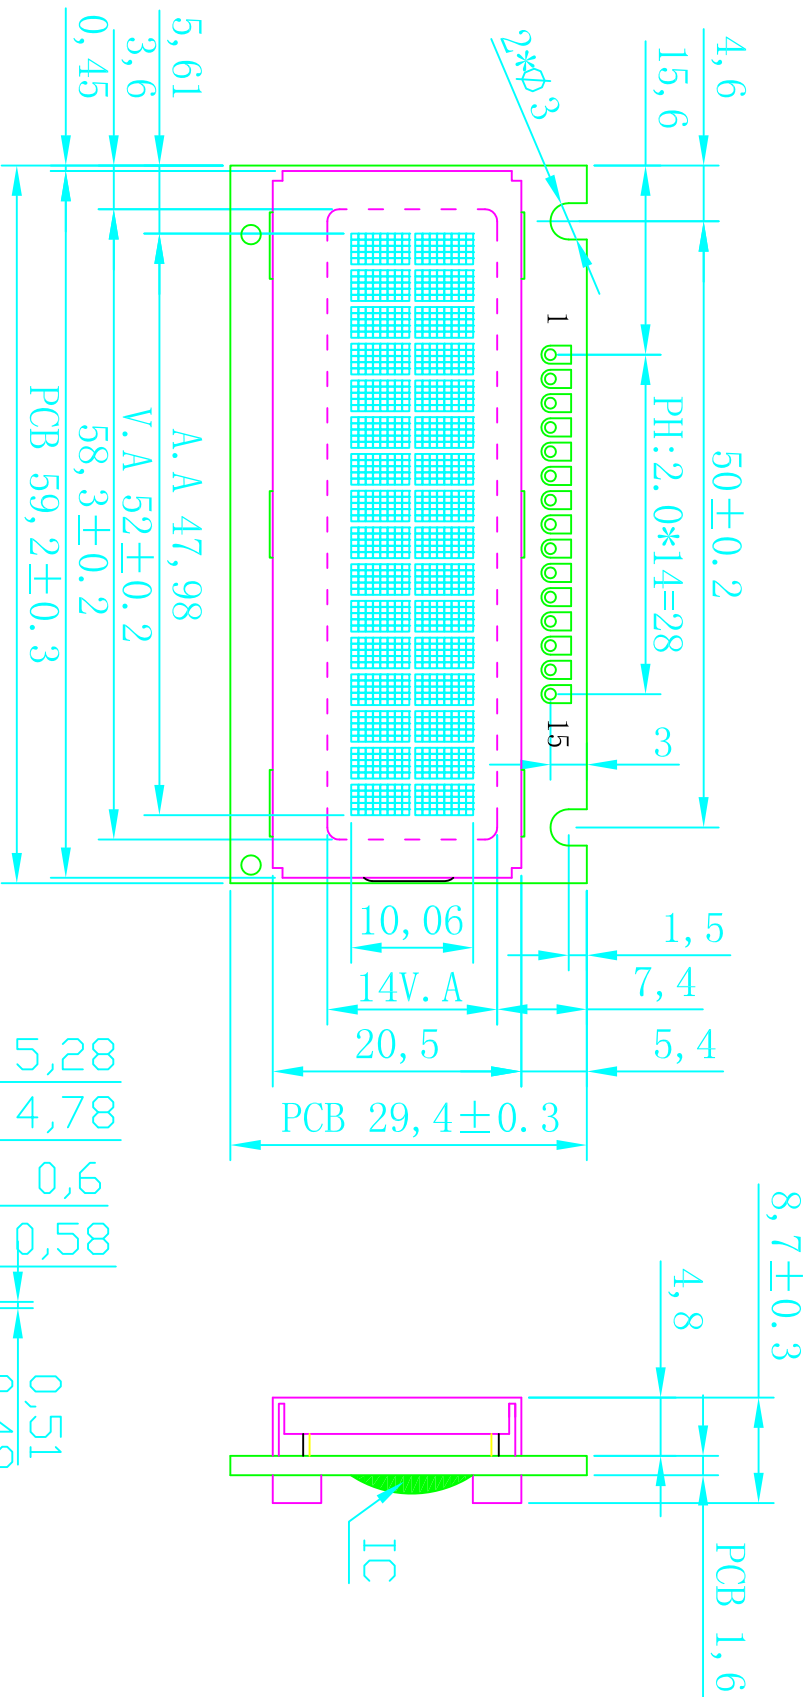

SPECIFICATION:

- 1). FSTN(GRAY) / POSITIVE/REFLECTIVE
- 2). DUTY: 1/16. BIAS: 1/5. VOP=4.8V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). OPERATING TEMPERATURE: -10~60°C
STORAGE TEMPERATURE: -20~70°C
- 5). DRIVE IC: SPLC780D
- 6). DRIVE POWER: VDD=5.0V
- 7). Connect Type: 斑马纸

Unspecified Tolerances:	±0.20	UNITS: mm	DATE:	MODE NUMBER:	PROJECTION	SHEET:	DATE:
DESIGN BY:	LQL	2013/4/10	MB1602G		1 OF 1	2013/4/10	
CHECKED BY:				DO NOT SCALE THIS DRAWING.			
CUSTOM NO.:							