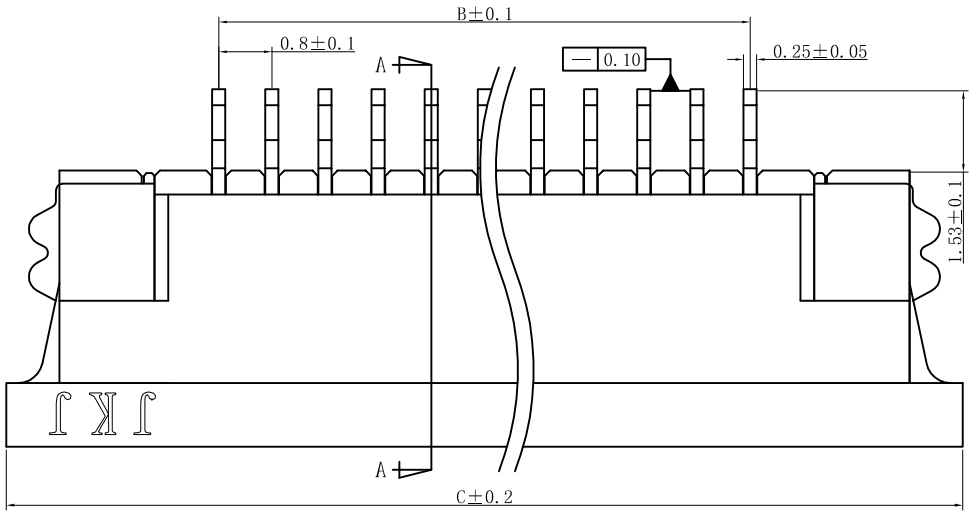

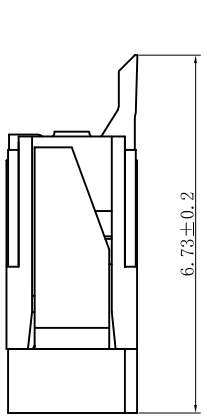

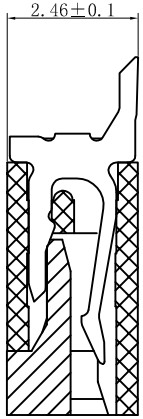

NO	胶体材质	锁扣材质	胶体颜色	锁扣颜色	柱子
1	LCP	LCP	本色	黑色	
2	PA9T	LCP	本色	黑色	

88416-XXX X X -X

PIN数

电镀：1镀金　2镀雾锡　3镀亮锡

包材：A管装　B袋装　C盒装

NO. of Contacts (n)	Dimensions		
	A	B	C
4	4.1	2.4	9.95
5	4.9	3.2	10.75
6	5.7	4.0	11.55
7	6.5	4.8	12.35
8	7.3	5.6	13.15
9	8.1	6.4	13.95
10	8.9	7.2	14.75
11	9.7	8.0	15.55
12	10.5	8.8	16.35
13	11.3	9.6	17.15
14	12.1	10.4	17.95
15	12.9	11.2	18.75
16	13.7	12.0	19.55
17	14.5	12.8	20.35
18	15.3	13.6	21.15
19	16.1	14.4	21.95
20	16.9	15.2	22.75
21	17.7	16.0	23.55
22	18.5	16.8	24.35
23	19.3	17.6	25.15
24	20.1	18.4	25.95
25	20.9	19.2	26.75
26	21.7	20.0	27.55
27	22.5	20.8	28.35
28	23.3	21.6	29.15
29	24.1	22.4	29.95
30	24.9	23.2	30.75
31	25.7	24.0	31.55
32	26.5	24.8	32.35
33	27.3	25.6	33.15
34	28.1	26.4	33.95
35	28.9	27.2	34.75
36	29.7	28.0	35.55
37	30.5	28.8	36.35
38	31.3	29.6	37.15

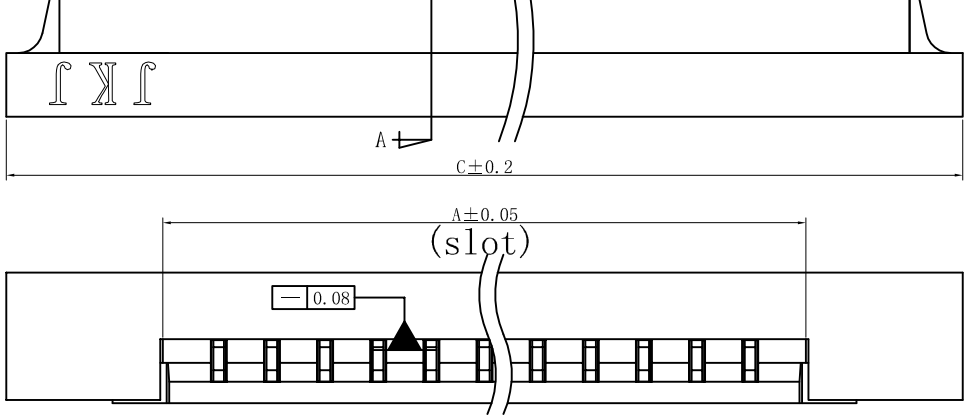

Electrical

Voltage:50 V AC(rms)/DC
Current:0.5 A AC(rms)/DC
Contact Resistance:20 mΩ max(initial)
Dielectric Withstanding Voltage:250 V AC/rms
Insulation Resistance:50 MΩ min
Operating Temp:-20° C～+85° C

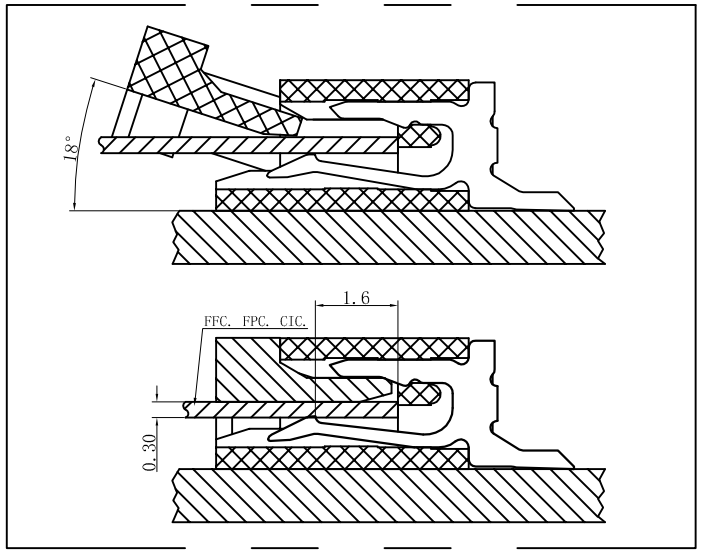

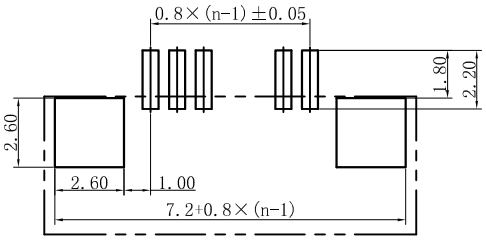

PC BOARD LAYOUT

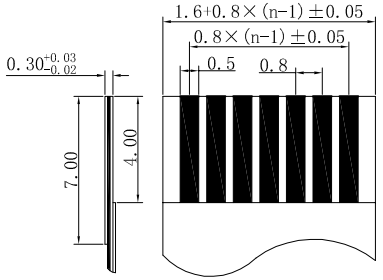

SER	AREA	REVISIONS	CHK	DATE

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

X. ±0.2
X.X ±0.1
X.XX ±0.05

ANG.
X ±0.5
X.X ±0.1

JKJ® 金科基电子有限公司

APPROVED	DATE	NAME
		FPC0.8拉拔式半包下接
CHECKED	DATE	
DRAWN 周建锋	DATE 2006/07/17	DRAWTING NO 88416-XXXXX-X

UNIT	SCALE	SIZE	REV
MM	5:1	A4	A