
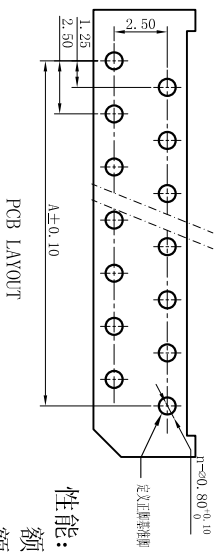


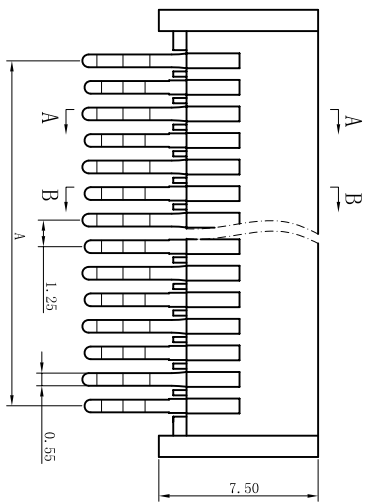
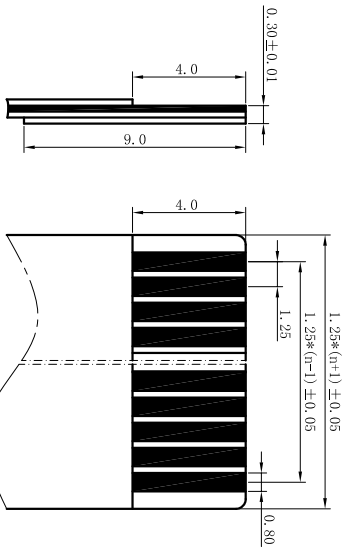



PITCH 1.25mm FPC CONNECTOR DIP TYPE

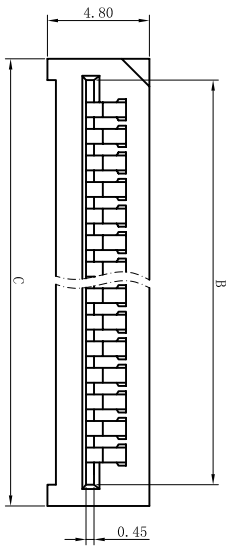

性能:

- 额定电流: 1A
- 额定电压: 200V
- 耐压: 500V
- 接触电阻: $\leq 20m\Omega$
- 绝缘电阻: $500M\Omega$
- 工作温度: $-20^{\circ}C \sim +85^{\circ}C$
- 塑件 (材质): PBT, UL94V-0
- 插簧 (材质): 磷青铜, 镀锡/镀金

孔位	A	B	C
4	3.75	6.25	8.55
5	5.00	7.50	9.80
6	6.25	8.75	11.05
7	7.50	10.00	12.30
8	8.75	11.25	13.55
9	10.00	12.50	14.80
10	11.25	13.75	16.05
11	12.50	15.00	17.30
12	13.75	16.25	18.55
13	15.00	17.50	19.80
14	16.25	18.75	21.05
15	17.50	20.00	22.30
16	18.75	21.25	23.55
17	20.00	22.50	24.80
18	21.25	23.75	26.05
19	22.50	25.00	27.30
20	23.75	26.25	28.55
21	25.00	27.50	29.80
22	26.25	28.75	31.05
23	27.50	30.00	32.30
24	28.75	31.25	33.55
25	30.00	32.50	34.80
26	31.25	33.75	36.05
27	32.50	35.00	37.30
28	33.75	36.25	38.55
29	35.00	37.50	39.80
30	36.25	38.75	41.05
31	37.50	40.00	42.30
32	38.75	41.25	43.55
33	40.00	42.50	44.80
34	41.25	43.75	46.05
35	42.50	45.00	47.30
36	43.75	46.25	48.55
37	45.00	47.50	49.80
38	46.25	48.75	51.05
39	47.50	50.00	52.30
40	48.75	51.25	53.55

mstcom

SHEN ZHEN DE RUI ELECTRONIC CO., LTD

TITLE: 1.25mm FPC(A型) 直插式 (正脚)

DWG NO.: 125N01-AUH0000000

SCALE	1/1	SHEET	1/1	REV.	A
-------	-----	-------	-----	------	---

UNITS	mm
X ± 0.3	X° ± 5°
.X ± 0.25	.X° ± 2°
.XX ± 0.20	.XX° ± 1°
.XXX ± 0.10	.XXX° ± 0.5°

NAME (EXTENDED USED)	MATERIAL	FINISH	Q'TY
1.25mm FPC(A型) 直插式 (正脚)			
PART NO. (EXTENDED USED)			
1.25-A-1P			
APDR:			
CHKD:			
DR:	YLZ	2011.09.28	