

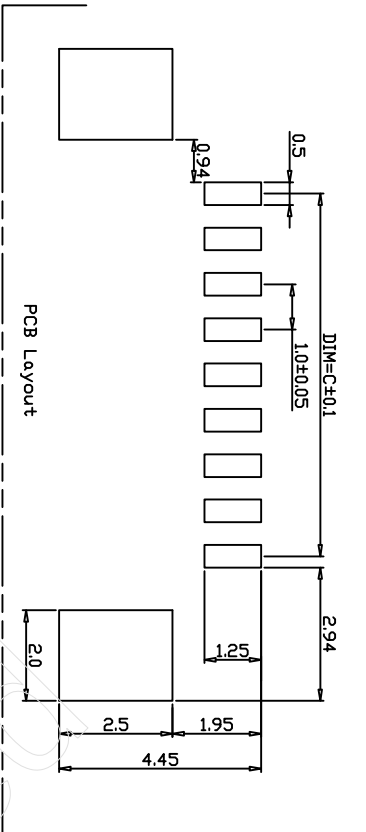
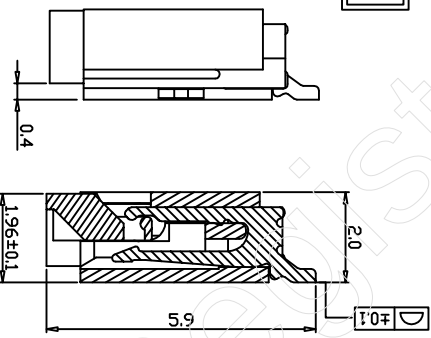


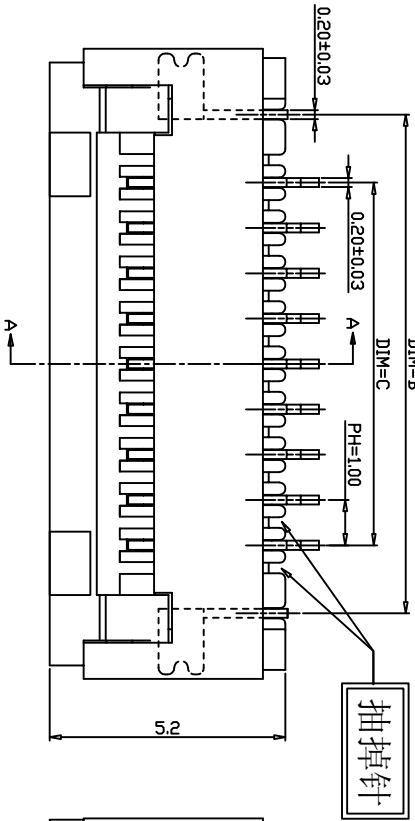


Electrical Characteristics:
Current rating: 0.5A AC/DC
Voltage rating: 50V AC/DC
Temperature range: -25°C~+85°C
Withstand Voltage: 500V AC/Minu
Contact Resistance: $\leq 20m\Omega$
Insulation resistance: $\geq 800m\Omega$
Relative Humidity: 93%+40°C

Material Description:
Contact: Phosphor Bronze Tin-Le
Solder Tab: Phosphor Bronze Tin-I
Housing: Thermoplastic(UL94V-0)
Slider: Thermoplastic(UL94V-0)

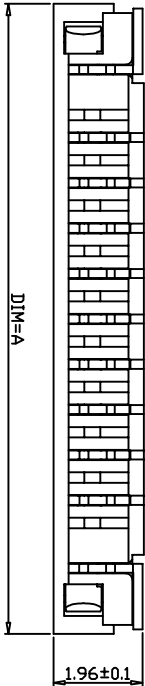

SECTION A-A

PIN数	DIM=A	DIM=B	DIM=C	DIM=D
30P	34.9	32.00	29.00	31.10
29P	33.9	31.00	28.00	30.10
28P	32.9	30.00	27.00	29.10
27P	31.9	29.00	26.00	28.10
26P	30.9	28.00	25.00	27.10
25P	29.9	27.00	24.00	26.10
24P	28.9	26.00	23.00	25.10
23P	27.9	25.00	22.00	24.10
22P	26.9	24.00	21.00	23.10
21P	25.9	23.00	20.00	22.10
20P	24.9	22.00	19.00	21.10
19P	23.9	21.00	18.00	20.10
18P	22.9	20.00	17.00	19.10
17P	21.9	19.00	16.00	18.10
16P	20.9	18.00	15.00	17.10
15P	19.9	17.00	14.00	16.10
14P	18.9	16.00	13.00	15.10
13P	17.9	15.00	12.00	14.10
12P	16.9	14.00	11.00	13.10
11P	15.9	13.00	10.00	12.10
10P	14.9	12.00	9.00	11.10
9P	13.9	11.00	8.00	10.10
8P	12.9	10.00	7.00	9.10
7P	11.9	9.00	6.00	8.10
6P	10.9	8.00	5.00	7.10
5P	9.9	7.00	4.00	6.10
4P	8.9	6.00	3.00	5.10
3P	7.9	5.00	2.00	4.10
2P	6.9	4.00	1.00	3.10

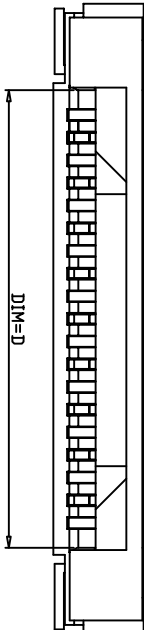

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE				APPROVED DATE				PART NO. 1. OK-DX-nPWB			
△	X.X	±0.15		CHECKED	DATE			DRAWING NO.	JUSHUO		
△	X.XX	±0.05		DRAWN	DATE			COMPUTER NO.			
△	X.XXX			杨帆	2004.6.16						
△	ANG.	±0°30'		NUMBER	SCALE SIZE	NAME				REV	A
SER	AREA	REVISIONS	CHK	DATE	UNIT	MM					