
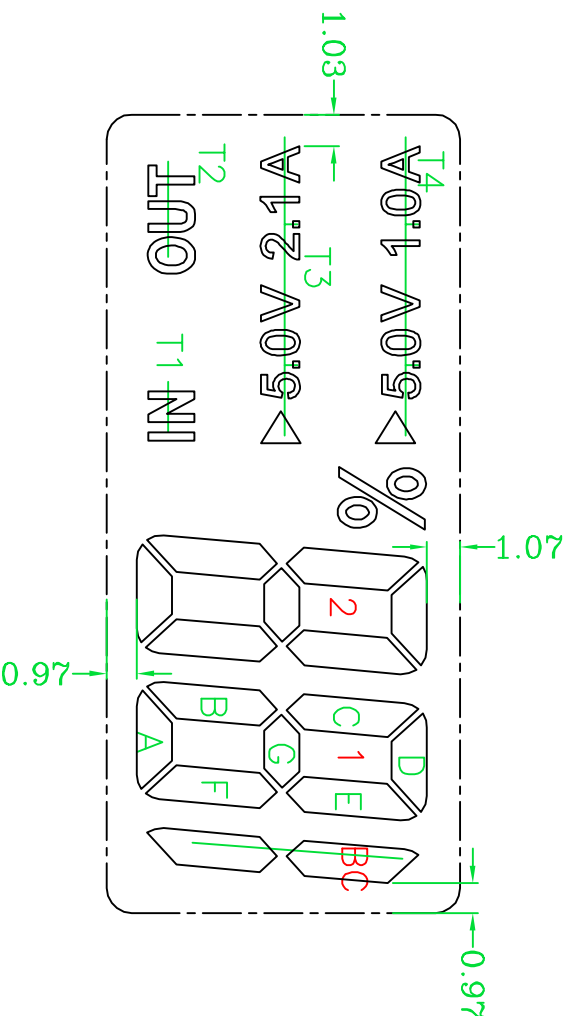


NOTES:



1. DISPLAY TYPE: TN
2. POLARIZER MODE: TRANSMISSIVE/POSITIVE.
3. DRIVE METHOD: 1/4DUTY, 1/2BIAS.
4. OPERATING VOLTAGE: 2.8V.
5. VIEWING DIRECTION: 6 O'CLOCK.
6. OPERATING TEMP: -20°C~+70°C.
7. STORAGE TEMP: -30°C~+80°C.
8. CONNECTOR: PIN

CUSTOMER P/N:		MODEL: RT625092	
DRAWN BY: CXT 2010-08-07		UNITS: mm	
CHECKED BY: HWC 2010-08-07		SHEET: 1/3	
DIMENSION TOLERANCE :		±0.2 mm	
		REVISION : 0	

PIN	1	2	3	4	5	6	7	8	9
COM1	1F	1A	2F	2A	T1	COM1			
COM2	1G	1B	2G	2B	T2		COM2		
COM3	1E	1C	2E	2C	T3			COM3	
COM4	BC	1D	%	2D	T4				COM4

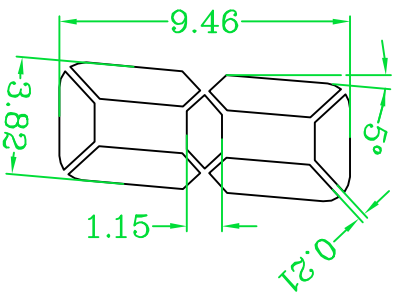

CUSTOMER P/N:		MODEL: RT625092	
DRAWN BY: CXT 2010-08-07			
CHECKED BY: HWC 2010-08-07			
DIMENSION TOLERANCE :		±0.2 mm	
		UNITS: mm	SHEET: 2/3
		REVISION : 0	

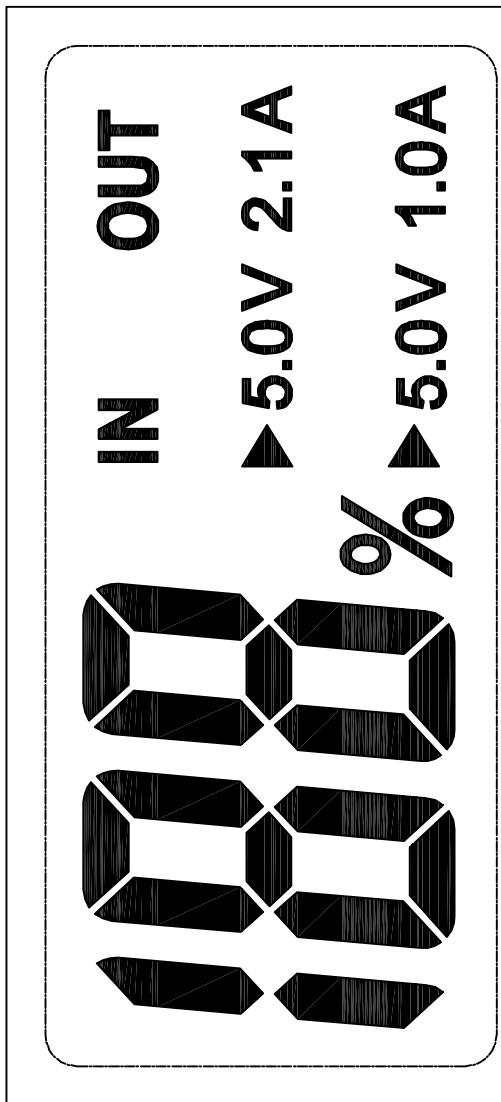

5:1



1:1

CUSTOMER P/N:		MODEL: RT625092	
DRAWN BY: CXT 2010-08-07			
CHECKED BY: HWC 2010-08-07			
DIMENSION TOLERANCE :		±0.2 mm	SHEET: 3/3
			REVISION : 0