


NOTES:


1. DISPLAY TYPE: HTN
2. POLARIZER MODE: TRANSPARENT/NEGATIVE
3. DRIVE METHOD: 1/4DUTY, 1/2BIAS
4. OPERATING VOLTAGE: 5.0V
5. VIEWING DIRECTION: 6 O'CLOCK.
6. OPERATING TEMP: -30°C~80°C.
7. STORAGE TEMP: -40°C~90°C.
8. CONNECTION: PIN


CUSTOMER P/N:		MODEL: RT6232579	
DRAWN BY: CXT 2013-09-12		UNITS: mm	
CHECKED BY: HWC 2013-09-12		SHEET: 1/3	
DIMENSION TOLERANCE :		REVISION : 0	
		±0.2 mm	

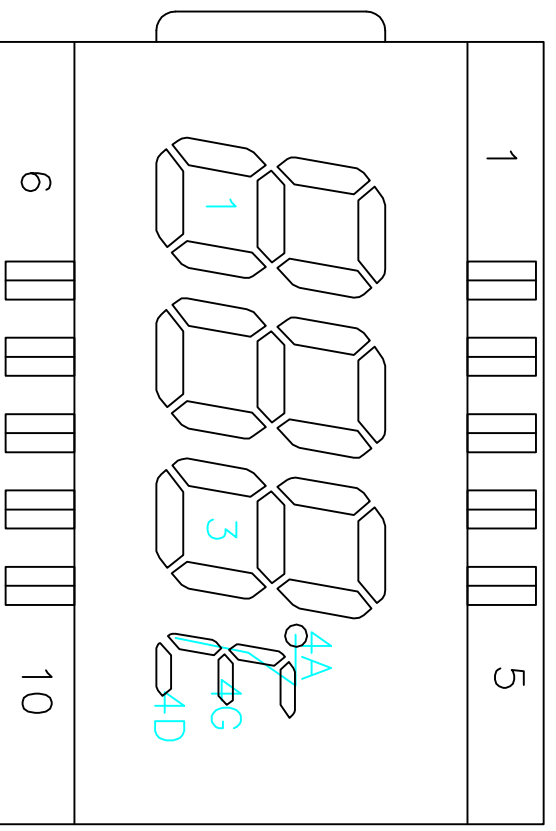

PIN	1	2	3	4	5	6	7	8	9	10
COM1				COM1	4G	1A	4D	2A	4A	3A
COM2			COM2		1F	1B	2F	2B	3F	3B
COM3		COM3			1G	1C	2G	2C	3G	3C
COM4	COM4				1E	1D	2E	2D	3E	3D

CUSTOMER P/N:		MODEL: RT6232579	
DRAWN BY: CXT 2013-09-12			
CHECKED BY: HWC 2013-09-12			
DIMENSION TOLERANCE :		±0.2 mm	UNITS: mm SHEET: 2/3 REVISION : 0

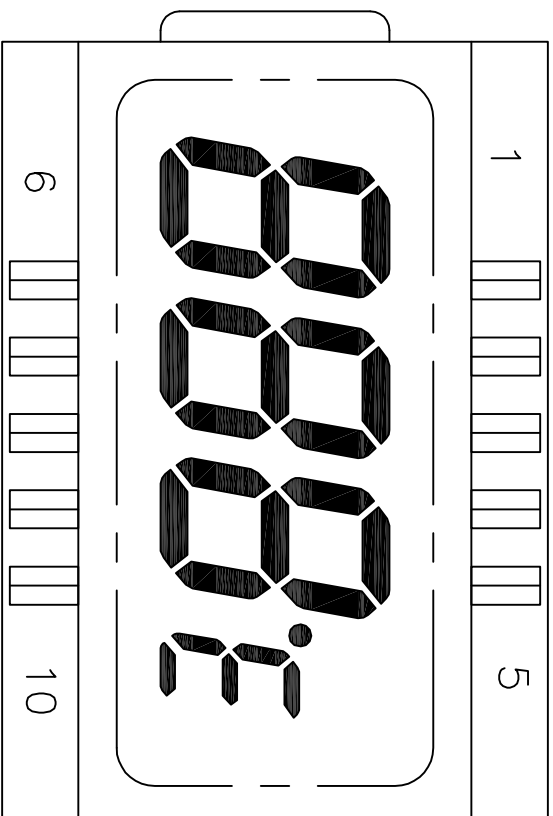

CUSTOMER P/N:		MODEL: RT6232579	
DRAWN BY: CXT 2013-09-12			
CHECKED BY: HWC 2013-09-12			
DIMENSION TOLERANCE :		±0.2 mm	SHEET: 3/3
			REVISION : 0