



- | | |
|----------------------|-----------------|
| 1. DISPLAY TYPE | TN, POSITIVE |
| 2. VIEWING DIRECTION | 6 O'CLOCK |
| 3. OPERATING VOLTAGE | 3.0 V |
| 4. POLARIZER MODE: | REFLECTIVE |
| 5. DRIVE METHOD | 1/1DUTY 1/1BIAS |
| 6. OPERATING TEMP | -10°C ~ 60°C |
| 7. STORAGE TEMP | -20°C ~ 70°C |
| 8. CONNECTOR | PIN |

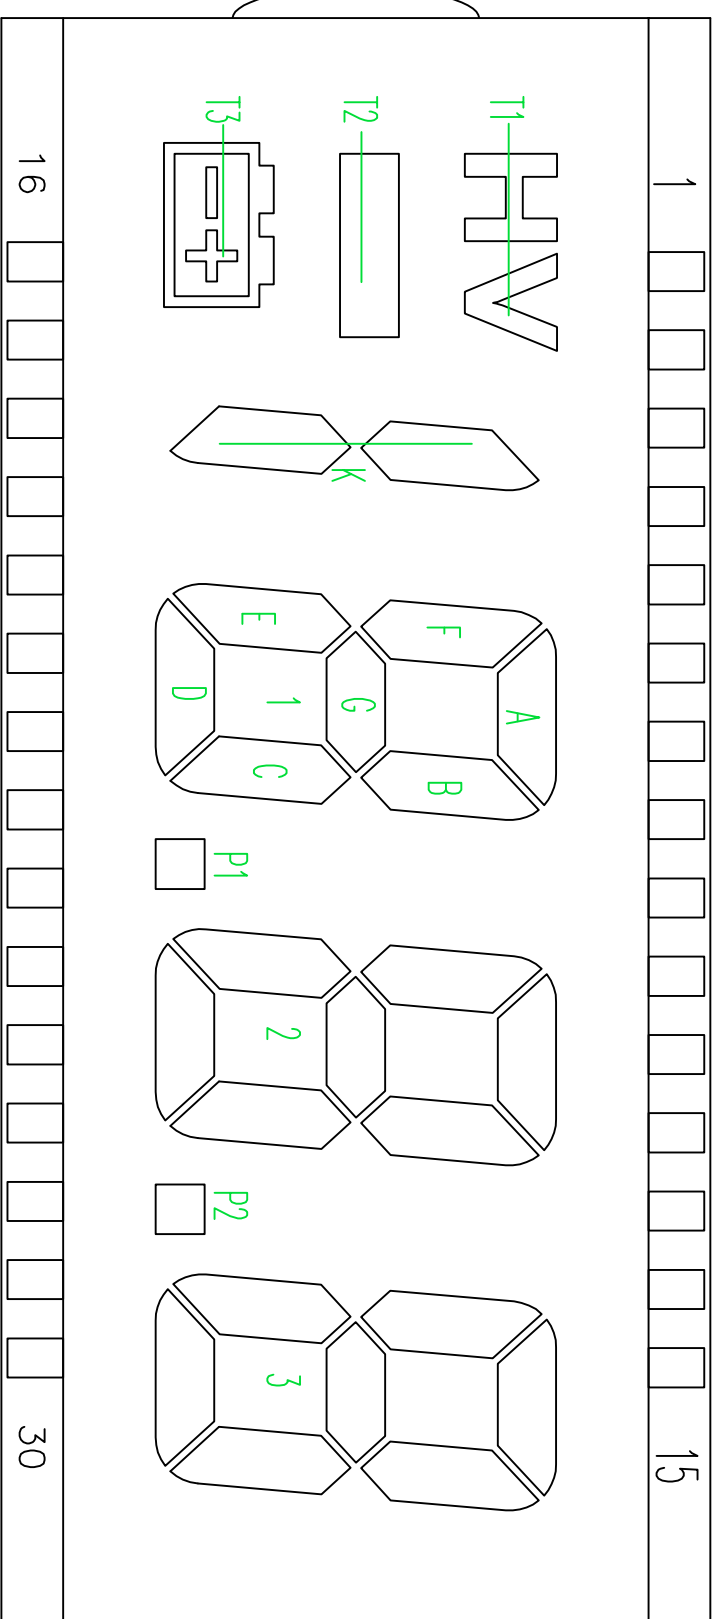


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
COM	T2	T1	1F	1A	1B	1G	2F	2A	2B	2G	3F	3A	3B	3G	NC

16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
T3	K1	1E	1D	1C	P1	2E	2D	2C	P2	3E	3D	3C	COM	COM

CUSTOMER P/N:		MODEL: RT625229	
DRAWN BY: CXT 2019-11-11			
CHECKED BY: HWC 2019-11-11			
DIMENSION TOLERANCE :		±0.2 mm	
		UNITS: mm	
		SHEET: 2/3	
		REVISION : 0	

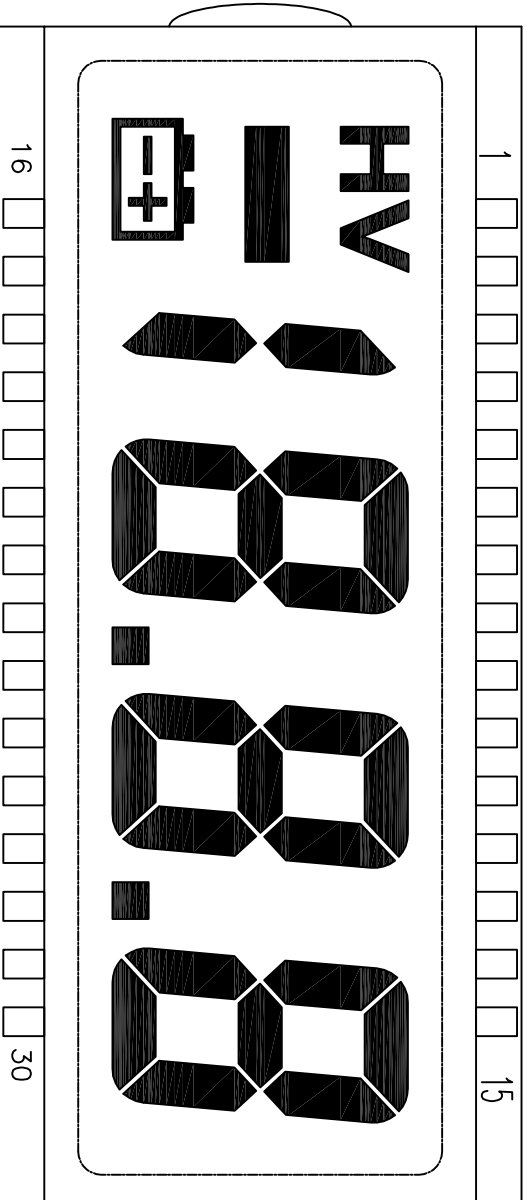

3:1

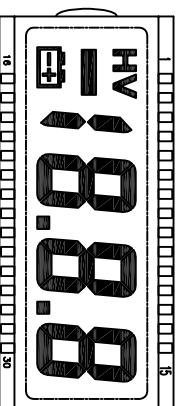

1:1

CUSTOMER P/N:		MODEL: RT625229	
DRAWN BY: CXT 2019-11-11		UNITS: mm	
CHECKED BY: HWC 2019-11-11		SHEET: 3/3	
DIMENSION TOLERANCE :		REVISION : 0	
		±0.2 mm	