


NO.	CONTENTS	Page
1	General Specifications	3--4
2	Outline Drawing	5
3	Absolute Maximum Ratings	6
4	Electrical Specifications and Instruction Code	7--9
5	Optical Characteristics	10--13
6	Reliability	14
7	Quality level	15--18
8	Precautions for Use of LCD Modules	19--20

Item	Contents	Unit	Note
LCD Type	TFT	-	
Display color	262K		1
LCD Duty		-	
LCD Bias	-	-	
Viewing Direction	6:00	O'Clock	
Viewing Area(W×H)	-	mm	
Active Area(W×H)	41.32(W) ×53.86(H) mm	mm	
Number of Dots	240 RGB(W) × 320 (H) Dots	mm	
Dot Size(W×H)		um	
Dot Pitch(W×H)	0.153(W)*0.153(H)mm	mm	
Controller	St7783	-	
VDD		V	
Vop	-	V	
Outline Dimensions	45.74W) ×63.59 (H)×3.6(D)	mm	
Backlight	LED(white)	-	
Operating Temperature	-20～+70℃	-	
Storage Temperature	-30～+870℃	-	
Weight	TBD	g	2
Data Transfer	8/16 bits parallel	-	
Polarizer Mode	Transmissive/Negative	-	

2. Outline

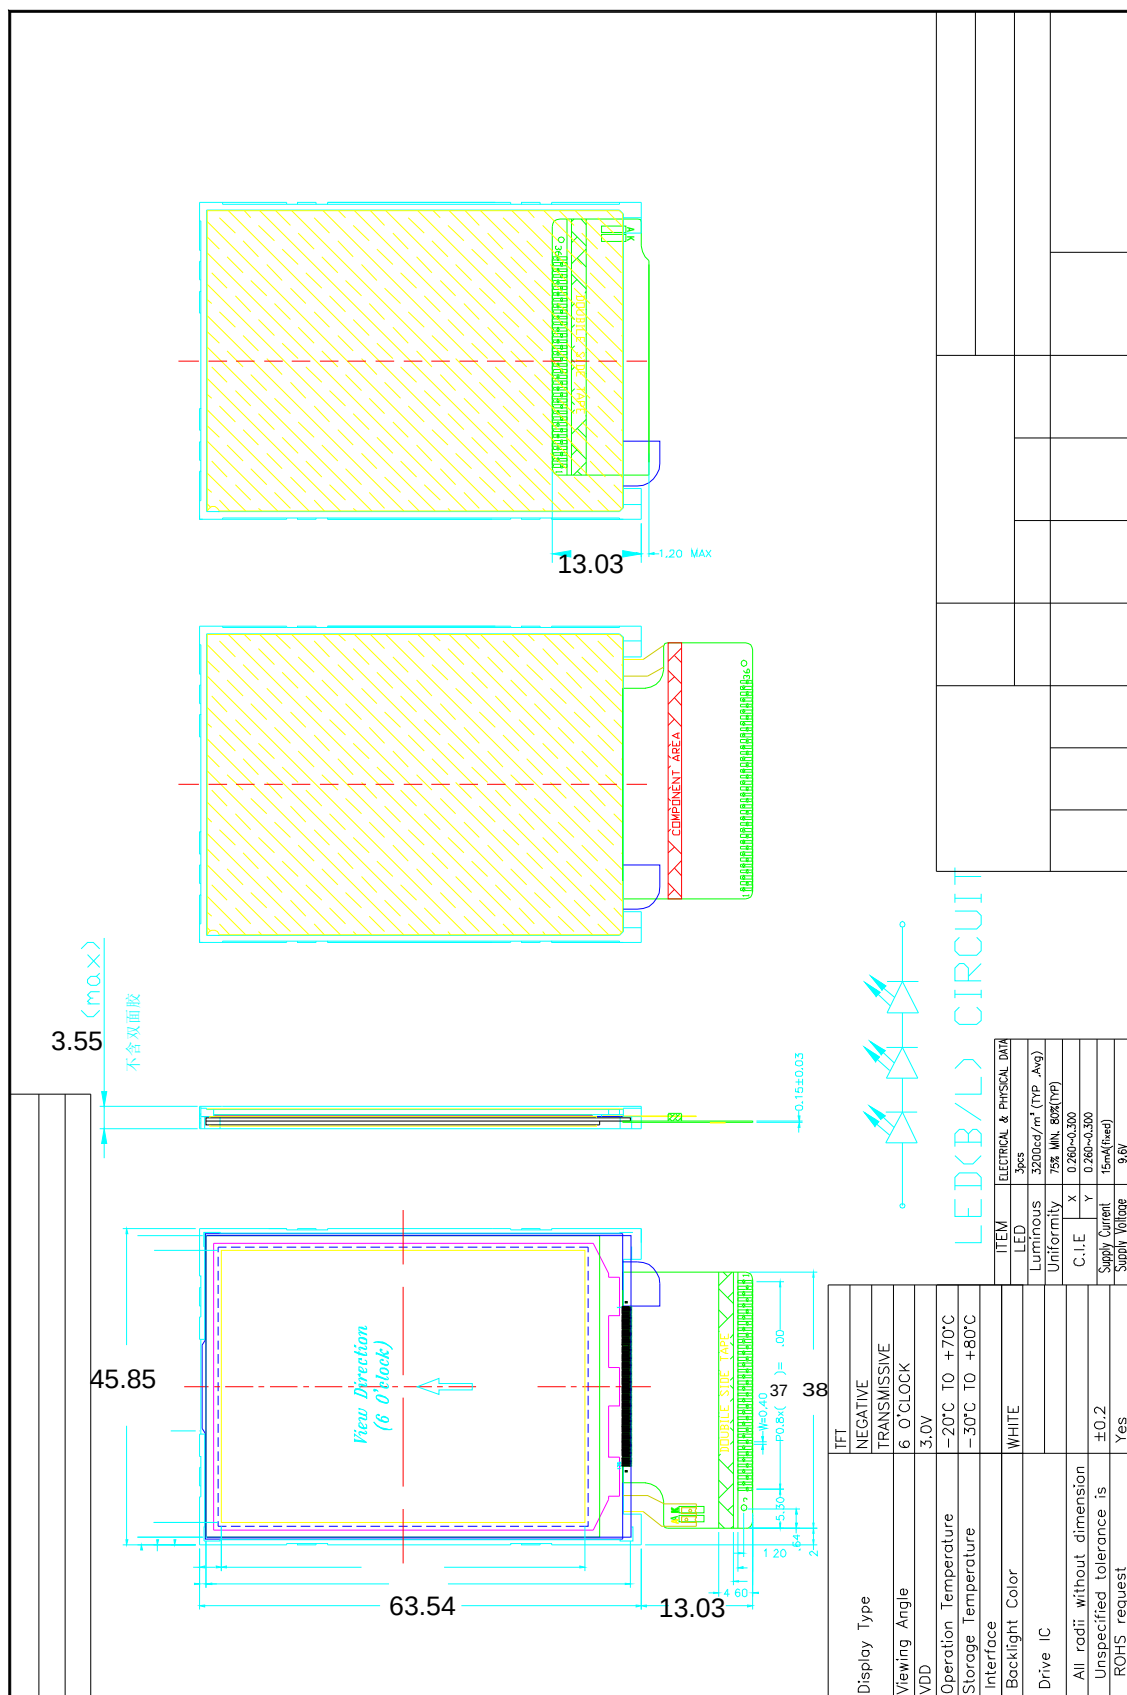

4.3 Interface Signals

PIN NO.	PIN OUT
1	k1
2	k2
3	k3
4	k4
5	a
6	gnd
7	NC
8	rs
9	cs
10	rst
11	rd
12	wr
13	db17
14	db16
15	db15
16	db14
17	db13
18	db12
19	db11
20	db10
21	d1
22	d2
23	d3
24	d4
25	d5
26	d6
27	d7
28	d8
29	
30	vdd
31	vdd
32	gnd
33	x-
34	y-
35	x+
36	x+
37	gnd