


PIN	DESC
1	NC
2	CAP1N
3	CAP1P
4	VOUT
5	VIN
6	VDD
7	SHL
8	DIRC
9	VSS
10	SDA
11	SCLK
12	RST

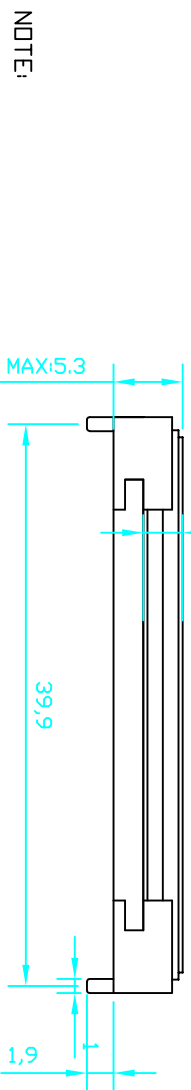

NOTE:

- 1) ALL DIMENSION ARE IN mm WITH ±0.2 TOLERANCE OR OTHER SPECILITY (Rohs Request)
- 2) DISPLAY MODE : FSTN/NEGATIVE/TRANSMISSIVE
- 3) VIEW ANGLE : 12:00视角
- 4) DRIVE CONDITION : 1/16DUTY,1/5BIAS
- 5) OPERATING VOLTAGE: VDP:5.6V VDD=3.3V
- 6) OPERATING TEMP : -10°C TD +60°C
- 7) STORAGE TEMP : -20°C TD +70°C
- 8) CONNECT MOTHEd : COG+FPc

NO.	MODIFY	DATE	MODEL NO.:	PROJECTION	PID
0		2016-09-15	MB1602C-GN3919FSL2P1.0~30FD		1:1
TEL.: 0765-27790735 FAX.: 0765-61351527			REV NO.:	GENERAL TOL.	SHEET: 1 OF 1
DWN: LQL			0	±0.2	DATE: 2016-10-15
CHK: WZQ			APP:	IB	CUSTOMER NO.: