




**SPECIFICATION  
FOR  
LCM MODULE**

**MODULE NO.:** ENH0802C-G

**REVISION NO.:** A

Customer Approval:



|             | SIGNATURE |
|-------------|-----------|
| PREPARED BY | Yao       |
| VERIFIED BY | Chenxiqo  |
| APPROVED BY | Wuziqiang |



## RECORDS OF REVISION

| Date      | Rev. | Description | Page | Design by |
|-----------|------|-------------|------|-----------|
| 2011/9/21 | 0    | New Sample. | -    | -         |
|           |      |             |      |           |
|           |      |             | -    | -         |
|           |      |             |      |           |
|           |      |             |      |           |
|           |      |             |      |           |
|           |      |             |      |           |
|           |      |             |      |           |
|           |      |             |      |           |
|           |      |             |      |           |



---

## **Contents**

### **1. SPECIFICATIONS**

- 1.1 Features**
- 1.2 Mechanical Specifications**
- 1.3 Absolute Maximum Ratings**
- 1.4 DC Electrical Characteristics**
- 1.5 Backlight & LED Characteristics**

### **2. MODULE STRUCTURE**

- 2.1 Counter Drawing**
- 2.2 Interface Pin Description**
- 2.3 Timing Characteristics**
- 2.4 Instruction Table**
- 2.5 Character Generator ROM**
- 2.6 Inspection Specification**



## 1. SPECIFICATIONS

### 1.1 Features


| Item              | Standard Value                   |
|-------------------|----------------------------------|
| Display Type      | 8characters × 2 lines            |
| LCD Type          | STN, POSITIVE (GRAY) ,REFLECTIVE |
| Driver Condition  | LCD Module : 1/16Duty , 1/5Bias  |
| Viewing Direction | 6 O'clock                        |
| Backlight Type    | -----                            |
| Interface         | 8-bit MPU interface              |
| Driver IC         | SPLC780D                         |

### 1.2 Mechanical Specifications

| Item              | Standard Value               | Unit |
|-------------------|------------------------------|------|
| Outline Dimension | 40(L) * 35.2(W) * Max 7.8(T) | mm   |
| Viewing Area      | 30.5(L) * 14( W)             | mm   |
| Dot size          | 0.5(W) × 0.5(H)              | mm   |
| Dot pitch         | 0.57(W) × 0.57(H)            | mm   |
| Character size    | 2.78(W) × 4.49(H)            | mm   |

### 1.3 Absolute Maximum Ratings

| Item                        | Symbol          | Condition  | Min.   | Max.      | Unit |
|-----------------------------|-----------------|------------|--------|-----------|------|
| System Power Supply Voltage | VDD             | -          | -0.3   | 5.5       | V    |
| LCD Driver Supply Voltage   | VLCD            | -          | VDD-12 | VDD-0.3   | V    |
| Input Voltage               | V <sub>IN</sub> | -          | -0.3   | VDD + 0.3 | V    |
| Operating Temperature       | T <sub>OP</sub> | -          | -20    | 70        | °C   |
| Storage Temperature         | T <sub>ST</sub> | -          | -30    | 80        | °C   |
| Storage Humidity            | H <sub>D</sub>  | Ta < 40 °C | 20     | 90        | %RH  |



## 1.4 DC Electrical Characteristics

VDD = 5.0V ± 0.2V, GND = 0V, Ta = 25°C

| Item                 | Symbol          | Condition | Min.   | Typ. | Max.   | Unit |
|----------------------|-----------------|-----------|--------|------|--------|------|
| Logic Supply Voltage | VDD             | -         | 3.0    | 5.0  | 5.5    | V    |
| Input High Voltage   | V <sub>IH</sub> | -         | 0.8VDD | -    | VDD    | V    |
| Input Low Voltage    | V <sub>IL</sub> | -         | GND    | -    | 0.3VDD | V    |
| Output High Voltage  | V <sub>OH</sub> | -         | 0.7VDD | -    | VDD    | V    |
| Output Low Voltage   | V <sub>OL</sub> | -         | GND    | -    | 0.2VDD | V    |

## 1.5 Backlight Characteristics

LCD Module without LED Backlight

Electrical / Optical Characteristics

Ta = 25°C




| Item                                | Symbol             | Conditions                                    | Min.  | Typ. | Max. | Unit              |
|-------------------------------------|--------------------|---|-------|------|------|-------------------|
| Forward Voltage                     | V <sub>f</sub>     | -----   | --    | --   | --   | V                 |
| Reverse Current                     | I <sub>r</sub>     | -----   |       |      | --   | uA                |
| Average Brightness                  | I <sub>V</sub>     | -----   |       |      |      | cd/m <sup>2</sup> |
| Wavelength<br>(Without LCD)         | λ <sub>d</sub>     | -----   | --    | --   | --   | nm                |
| Luminous Intensity<br>(without LCD) | L <sub>v</sub> Sub | -----   |       |      |      | cd/m <sup>2</sup> |
| Uniformity                          | Δ%                 | I <sub>V</sub> Min / I <sub>V</sub> Max *100% | --    | -    | -    | %                 |
| Color                               |                    |   | ----- |      |      |                   |

# 2. MODULE STRUCTURE

## 2.1 Counter Drawing

### 2.1.1 LCM Mechanical Diagram

| INTERFACE |           |
|-----------|-----------|
| 1         | VSS       |
| 2         | VDDI(5V)  |
| 3         | V0        |
| 4         | RS        |
| 5         | RW        |
| 6         | E         |
| 7         | DB0       |
| 8         | DB1       |
| 9         | DB2       |
| 10        | DB3       |
| 11        | DB4       |
| 12        | DB5       |
| 13        | DB6       |
| 14        | DB7       |
| 15        | LED-A(5V) |
| 16        | LED-K     |

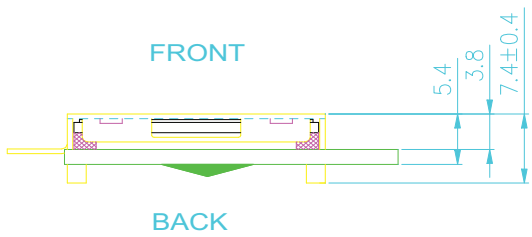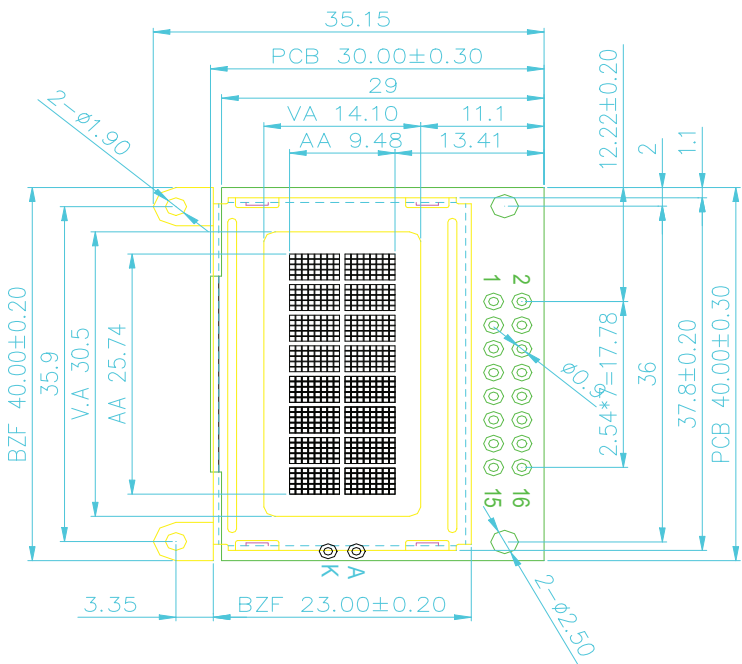

- SPECIFICATION:**
- 1). STN(GARY) /POSITIVE/REFLECTIVE
  - 2). DUTY:1/16. BIAS:1/5. VOP=4.7V
  - 3). VIEWING ANGLE: 6 0' CLOCK
  - 4). OPERATING TEMPERATURE: -20~70°C  
STORAGE TEMPERATURE: -30~80°C
  - 5). DRIVE IC: SPLC780D
  - 6). DRIVE POWER: VDD=5.0V

| VER DETAIL DISCRPTION | DATE      |
|-----------------------|-----------|
| 00 FIRST ISSUE        | 2011-8-24 |

**深圳市睿显电子有限公司**  
SHENZHEN ENRICH ELECTRONICS CO.,LTD


|                              |           |                 |                         |                 |
|------------------------------|-----------|-----------------|-------------------------|-----------------|
| Unspecified Tolerance: ±0.20 | UNITS: mm | DATE: 2011/8/24 | MODE NUMBER: ENH0802B-G | SHEET: 1 of 1   |
| DESIGN BY: WZQ               |           |                 |                         | DATE: 2011/8/24 |
| CHECKED BY:                  |           |                 |                         |                 |

DO NOT SCALE THIS DRAWING.



## 2.2 Interface Pin Description

| No.  | Symbol  | Function                          |
|------|---------|-----------------------------------|
| 1    | VSS     | Ground (0V)                       |
| 2    | VDD     | Supply Voltage for Logic (+5.0V ) |
| 3    | VO      | Contrast Adjustment               |
| 4    | RS      | Data/Instruction Select           |
| 5    | R/W     | Read/Write Select                 |
| 6    | E       | Enable Signal                     |
| 7-14 | DB0-DB7 | Data Bus                          |
| 15   | LED_A   | LED Power Supply + (5.0V)         |
| 16   | LED_K   | LED Power Supply - (0V)           |

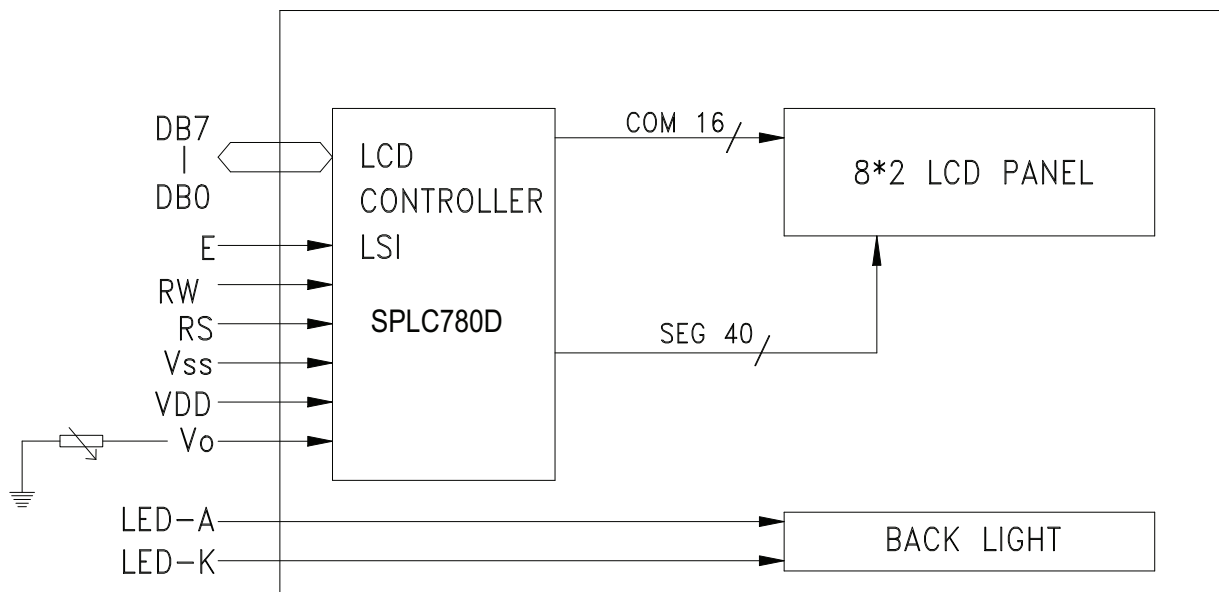

Character located 1 2 3 4 5 6 7 8

|              |    |    |    |    |    |    |    |    |
|--------------|----|----|----|----|----|----|----|----|
| DDRAMaddress | 00 | 01 | 02 | 03 | 04 | 05 | 06 | 07 |
| DDRAMaddress | 40 | 41 | 42 | 43 | 44 | 45 | 46 | 47 |



## 2.3 Timing Characteristics

### DC Characteristics

| Characteristics            | Symbol           | Limit  |       |        | Unit | Test Condition   |
|----------------------------|------------------|--------|-------|--------|------|--|
|                            |                  | Min.   | Typ.  | Max.   |      |  |
| Operating Current          | IDD              | -      | 0.55  | 0.8    | mA   | External clock (Note)  |
| Input High Voltage         | V <sub>IH1</sub> | 2.2    | -     | VDD    | V    | Pins:(E, RS, R/W, DB7 - 0)   |
| Input Low Voltage          | V <sub>IL1</sub> | -0.3   | -     | 0.6    | V    |  |
| Input High Voltage         | V <sub>IH2</sub> | VDD-1  | -     | VDD    | V    | Pin OSC1   |
| Input Low Voltage          | V <sub>IL2</sub> | -0.2   | -     | 1.0    | V    | Pin OSC1   |
| Input High Current         | I <sub>IH</sub>  | -2.0   | -     | 2.0    | μA   | Pins: (RS, R/W, DB7 - 0)   |
| Input Low Current          | I <sub>IL</sub>  | -20.0  | -50.0 | -100.0 | μA   | VDD = 5.0V   |
| Output High Voltage (TTL)  | V <sub>OH1</sub> | 2.4    | -     | VDD    | V    | I <sub>OH</sub> = - 0.1mA<br>Pins: DB7 - 0                           |
| Output Low Voltage (TTL)   | V <sub>OL1</sub> | -      | -     | 0.4    | V    | I <sub>OL</sub> = 0.1mA<br>Pins: DB7 - 0                             |
| Output High Voltage (CMOS) | V <sub>OH2</sub> | 0.9VDD | -     | VDD    | V    | I <sub>OH</sub> = - 40.0μA,<br>Pins: CL1, CL2, M, D                  |
| Output Low Voltage (CMOS)  | V <sub>OL2</sub> | -      | -     | 0.1VDD | V    | I <sub>OL</sub> = 40.0μA, Pins:<br>CL1, CL2, M, D                    |
| Driver ON Resistance (COM) | R <sub>COM</sub> | -      | -     | 20.0   | KΩ   | I <sub>O</sub> = ±50.0μA, V <sub>LCD</sub> = 4.0V<br>Pins: COM16 - 1 |
| Driver ON Resistance (SEG) | R <sub>SEG</sub> | -      | -     | 30.0   | KΩ   | I <sub>O</sub> = ±50.0μA, V <sub>LCD</sub> = 4.0V<br>Pins: SEG40 - 1 |
| LCD Voltage                | V <sub>LCD</sub> | 3.0    | -     | 11.0   | V    | VDD - V5, 1/4 bias or 1/5 bias                                       |

Note: F<sub>OSC</sub> = 250.0KHz, VDD = 5.0V, pin E = "L", RS, R/W, DB7 - 0 are open, all outputs are no loads.


### AC Characteristics

| Characteristics | Symbol            | Limit |       |       | Unit | Test Condition               |
|-----------------|-------------------|-------|-------|-------|------|------------------------------|
|                 |                   | Min.  | Typ.  | Max.  |      |                              |
| OSC Frequency   | F <sub>OSC1</sub> | 190.0 | 270.0 | 350.0 | KHz  | VDD = 5.0V<br>Rf = 91.0KΩ±2% |






Timing Diagram  
Writing mode

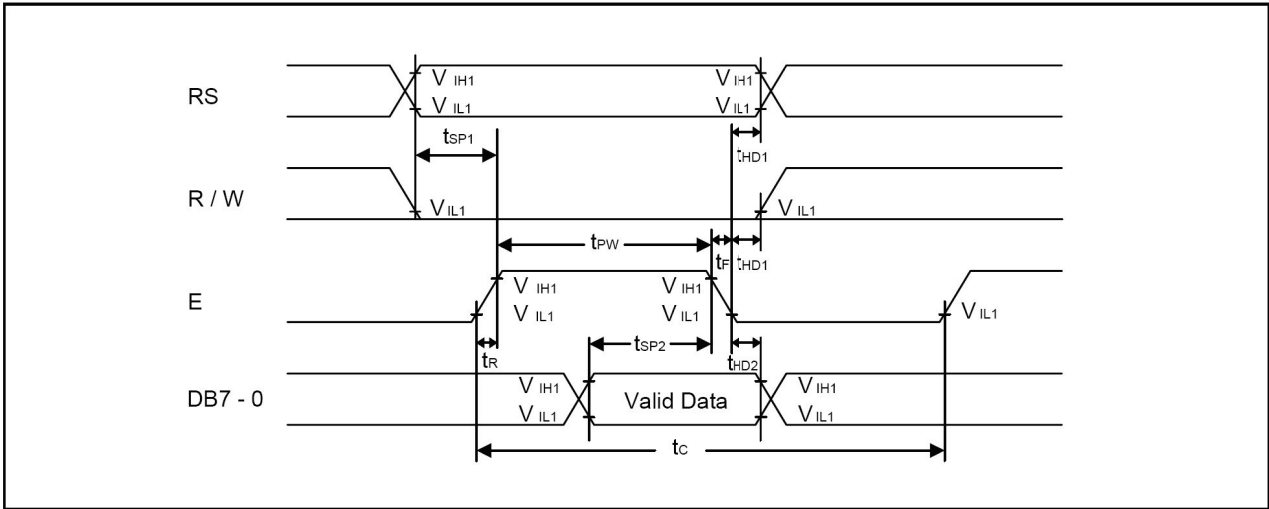

| Characteristics    | Symbol     | Limit |      |      | Unit | Test Condition   |
|--------------------|------------|-------|------|------|------|------------------|
|                    |            | Min.  | Typ. | Max. |      |                  |
| E Cycle Time       | $t_C$      | 400.0 | -    | -    | ns   | Pin E            |
| E Pulse Width      | $t_{PW}$   | 150.0 | -    | -    | ns   | Pin E            |
| E Rise/Fall Time   | $t_R, t_F$ | -     | -    | 25.0 | ns   | Pin E            |
| Address Setup Time | $t_{SP1}$  | 30.0  | -    | -    | ns   | Pins: RS, R/W, E |
| Address Hold Time  | $t_{HD1}$  | 10.0  | -    | -    | ns   | Pins: RS, R/W, E |
| Data Setup Time    | $t_{SP2}$  | 40.0  | -    | -    | ns   | Pins: DB7 - 0    |
| Data Hold Time     | $t_{HD2}$  | 10.0  | -    | -    | ns   | Pins: DB7 - 0    |

Read mode

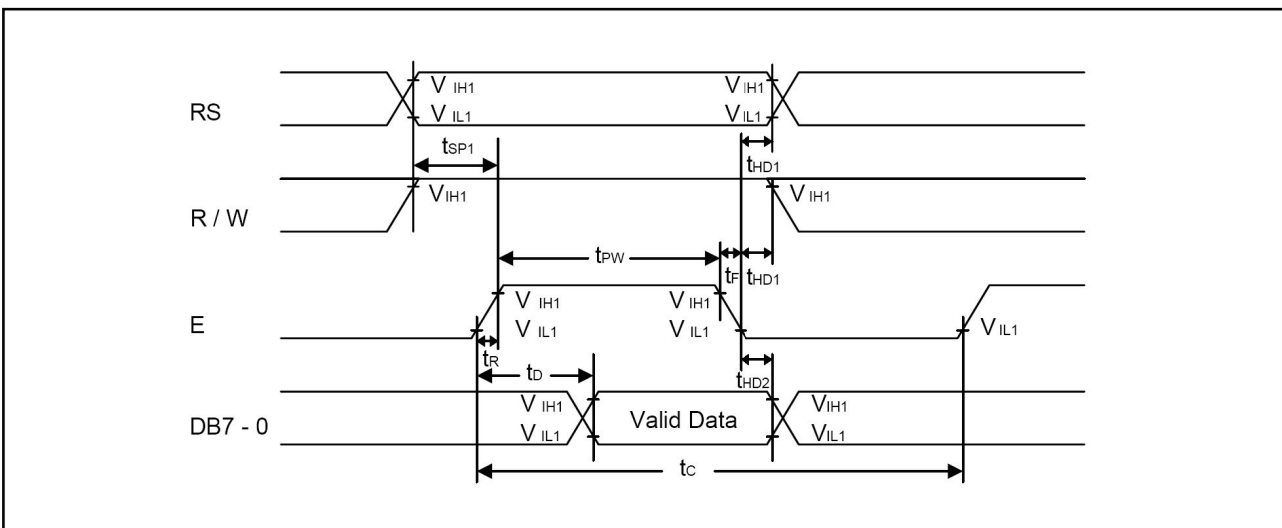



| Characteristics        | Symbol     | Limit |      |       | Unit | Test Condition  |
|------------------------|------------|-------|------|-------|------|-----------------|
|                        |            | Min.  | Typ. | Max.  |      |                 |
| E Cycle Time           | $t_C$      | 400.0 | -    | -     | ns   | Pin E           |
| E Pulse Width          | $t_W$      | 150.0 | -    | -     | ns   | Pin E           |
| E Rise/Fall Time       | $t_R, t_F$ | -     | -    | 25.0  | ns   | Pin E           |
| Address Setup Time     | $t_{SP1}$  | 30.0  | -    | -     | ns   | Pins: RS, R/W,E |
| Address Hold Time      | $t_{HD1}$  | 10.0  | -    | -     | ns   | Pins: RS, R/W,E |
| Data Output Delay Time | $t_D$      | -     | -    | 100.0 | ns   | Pins: DB7 - 0   |
| Data hold time         | $t_{HD2}$  | 20.0  | -    | -     | ns   | Pin DB7 - 0     |

## 2.4 Instruction Table

### ◆ Display Control Instruction

| Instruction                        | Instruction Code |    |     |     |     |     |     |     |     |     | Description  | Execution time<br>( $F_{OSC} = 270KHz$ ) |
|------------------------------------|------------------|----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|
|                                    | RS               | RW | DB7 | DB6 | DB5 | DB4 | DB3 | DB2 | DB1 | DB0 |  |  |
| Clear Display                      | 0                | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 1   | Write "20H" to DDRAM and set DDRAM address to "00H" from AC  | 1.52ms                                   |
| Return Home                        | 0                | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 1   | -   | Set DDRAM address to "00H" from AC and return cursor to its original position if shifted. The contents of DDRAM are not changed.       | 1.52ms                                   |
| Entry Mode Set                     | 0                | 0  | 0   | 0   | 0   | 0   | 0   | 1   | I/D | S   | Assign cursor moving direction and enable the shift of entire display  | 38 $\mu$ s                               |
| Display ON/OFF Control             | 0                | 0  | 0   | 0   | 0   | 0   | 1   | D   | C   | B   | Set display(D), cursor(C), and blinking of cursor(B) on/off control bit.   | 38 $\mu$ s                               |
| Cursor or Display Shift            | 0                | 0  | 0   | 0   | 0   | 1   | S/C | R/L | -   | -   | Set cursor moving and display shift control bit, and the direction, without changing of DDRAM data.                                    | 38 $\mu$ s                               |
| Function Set                       | 0                | 0  | 0   | 0   | 1   | DL  | N   | F   | -   | -   | Set interface data length (DL: 8-bit/4-bit), numbers of display line (N: 2-line/1-line) and, display font type (F: 5x10 dots/5x8 dots) | 38 $\mu$ s                               |
| Set CGRAM Address                  | 0                | 0  | 0   | 1   | AC5 | AC4 | AC3 | AC2 | AC1 | AC0 | Set CGRAM address in address counter.  | 38 $\mu$ s                               |
| Set DDRAM Address                  | 0                | 0  | 1   | AC6 | AC5 | AC4 | AC3 | AC2 | AC1 | AC0 | Set DDRAM address in counter   | 38 $\mu$ s                               |
| Read Busy Flag and Address Counter | 0                | 1  | BF  | AC6 | AC5 | AC4 | AC3 | AC2 | AC1 | AC0 | Whether during internal operation or not can be known by reading BF. The contents of address counter can also be read.                 |  |
| Write Data to RAM                  | 1                | 0  | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  | Write data into internal RAM (DDRAM/CGRAM).  | 38 $\mu$ s                               |
| Read Data from RAM                 | 1                | 1  | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  | Read data from internal RAM (DDRAM/CGRAM).   | 38 $\mu$ s                               |



\* "-": don't care

## 2.5 Character Generator ROM

| Upper<br>4 bit<br>Lower<br>4 bit | LLLL | LLLH | LLHL | LLHH | LHLL | LHLH | LHHL | LHHH | HLLL | HLLH | HLHL | HLHH | HLLL | HLLH | HHLH | HHHH |
|----------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| LLLL                             |      |      |      | 0    | 1    | 2    | 3    | 4    | 5    | 6    | 7    | 8    | 9    | A    | B    | C    |
| LLLH                             |      |      | !    | 1    | Q    | W    |      |      |      |      | .    | ア    | キ    | シ    | フ    | ク    |
| LLHL                             |      |      | "    | 2    | R    | B    |      |      |      |      | 「    | イ    | ウ    | エ    | オ    | カ    |
| LLHH                             |      |      | #    | 3    | C    | S    |      |      |      |      | 」    | ウ    | テ    | モ    | ミ    | メ    |
| LHLL                             |      |      | *    | 4    | D    | T    |      |      |      |      | ノ    | ホ    | ト    | ナ    | ニ    | ノ    |
| LHLH                             |      |      | &    | 5    | E    | U    |      |      |      |      | .    | オ    | ホ    | コ    | ク    | ケ    |
| LHHL                             |      |      | &    | 6    | F    | V    |      |      |      |      | ヲ    | カ    | ニ    | ミ    | メ    | モ    |
| LHHH                             |      |      | '    | 7    | G    | W    |      |      |      |      | マ    | キ    | ウ    | エ    | オ    | カ    |
| HLLL                             |      |      | C    | 8    | H    | X    |      |      |      |      | イ    | ウ    | ホ    | リ    | ル    | ロ    |
| HLLH                             |      |      | >    | 9    | I    | Y    |      |      |      |      | ウ    | ケ    | ル    | ル    | ル    | ル    |
| HLHL                             |      |      | *    | 0    | J    | Z    |      |      |      |      | ホ    | コ    | シ    | レ    | リ    | リ    |
| HLHH                             |      |      | +    | 1    | K    | 0    |      |      |      |      | オ    | ホ    | ロ    | ロ    | ロ    | ロ    |
| HLLL                             |      |      | .    | <    | L    | 1    |      |      |      |      | ホ    | シ    | フ    | フ    | フ    | フ    |
| HLLH                             |      |      | -    | =    | M    | 2    |      |      |      |      | マ    | ウ    | シ    | シ    | シ    | シ    |
| HHHL                             |      |      | .    | >    | N    | 3    |      |      |      |      | モ    | ホ    | ホ    | ホ    | ホ    | ホ    |
| HHHH                             |      |      | /    | ?    | O    | 4    |      |      |      |      | ウ    | ウ    | ウ    | ウ    | ウ    | ウ    |

## 2.6 Inspection Specification

- ◆ Inspection Standard : MIL-STD-105E Table Normal Inspection Single Sampling Level II .
- ◆ Equipment : Gauge、MIL-STD、Powertip Tester、Sample
- ◆ Defect Level : Major Defect AQL 0.4; Minor Defect AQL 1.5 .
- ◆ OUT Going Defect Level : Sampling .
- ◆ Manner of appearance test :
  - (1). The test be under 40W×2 fluorescent light ' and distance of view must be at 30 cm.
  - (2). The test direction is base on about around 45° of vertical line. (Fig. 1)
  - (3). Definition of area . (Fig. 2)

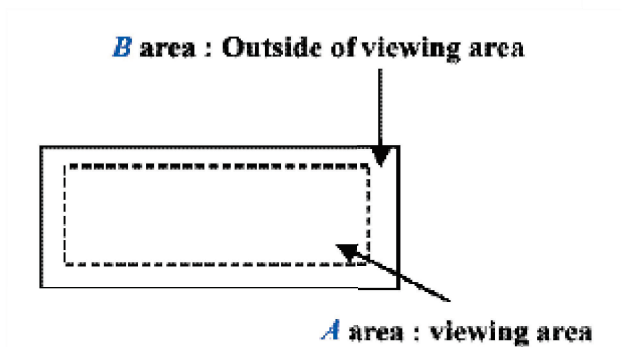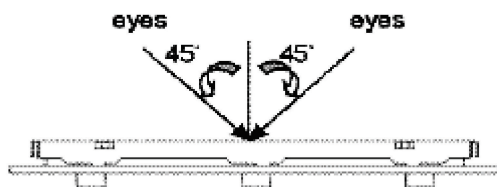



### ◆ Specification:

| NO | Item  | Criterion   | level |
|----|---|---|-------|
| 01 | Product condition                                   | 1.1 The part number is inconsistent with work order of Production.  | Major |
|    |   | 1.2 Mixed production types.   | Major |
|    |   | 1.3 Assembled in inverse direction.   | Major |
| 02 | Quantity  | 2.1 The quantity is inconsistent with work order of production.   | Major |
| 03 | Outline dimension                                   | 3.1 Product dimension and structure must conform to Structure diagram.  | Major |
| 04 | Electrical Testing                                  | 4.1 Missing line character、dot and icon.  | Major |
|    |   | 4.2 No function or no display.  | Major |
|    |   | 4.3 Output data is error.   | Major |
|    |   | 4.4 LCD viewing angle defect.   | Major |
|    |   | 4.5 Current consumption exceeds product specifications.   | Major |
| 05 | Black or white dot、scratch、contamination Round type | 5.1 Round type:<br>5.1.1 display only :<br>• White and black spots on display $\leq 0.25\text{mm}$ , no more than Four white or black spots present.<br>• Densely spaced : NO more than two spots or lines within | Minor |




3mm

◆ Specification :



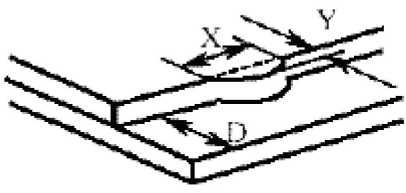
| NO | Item  | Criterion  | level |
|----|---|--|-------|
| 05 | <p>Black or white dot, scratch, contamination<br/>Round type</p>  <p><math>\Phi = (x+y)/2</math></p>  | <p>5.1.2 Non-display :</p> <p>Dimension (diameter : <math>\Phi</math>)<br/>Acceptance(Q'ty)</p> <p><math>\Phi \leq 0.10\text{mm}</math><br/>Accept no dense</p> <p><math>0.10\text{mm} &lt; \Phi \leq 0.20\text{mm}</math> 3</p> <p><math>0.20\text{mm} &lt; \Phi \leq 0.25\text{mm}</math> 2</p> <p>Total 4</p> <p>5.1.3 Line type:<br/>Dimension (diameter : <math>\Phi</math>)<br/>Acceptance (Q'ty)</p> <p>Length<br/>width<br/>A area<br/>B area</p> <p>---</p> <p><math>w \leq 0.03\text{mm}</math><br/>Accept no dense<br/>Don't count</p> <p><math>L \leq 3.0\text{mm}</math><br/><math>0.03\text{mm} &lt; \Phi \leq 0.05\text{mm}</math></p> <p>4</p> <p>Don't count</p> <p><math>L \leq 2.5\text{mm}</math><br/><math>0.05\text{mm} &lt; \Phi \leq 0.075\text{mm}</math></p> <p>Don't count</p> <p>---</p> <p><math>w &gt; 0.075\text{mm}</math><br/>As round type</p> | Minor |

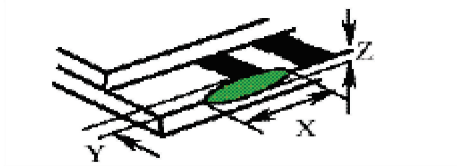

|    |                       |   |       |
|----|-----------------------|---|-------|
| 06 | Polarizer<br>Bubble   | <p>Dimension (diameter : <math>\Phi</math>)</p> <p>A area</p> <p>Acceptance(Q'ty)</p> <p>B area<br/> <math>\Phi \leq 0.20\text{mm}</math><br/>         Accept no dense<br/>         Don't count</p> <p><math>0.20\text{mm} &lt; \Phi \leq 0.50\text{mm}</math><br/>         3<br/>         Don't count</p> <p><math>0.50\text{mm} &lt; \Phi \leq 1.00\text{mm}</math><br/>         2<br/>         Don't count</p> <p><math>\Phi &gt; 1.00\text{mm}</math><br/>         0<br/>         Don't count</p> <p>Total quantity<br/>         4<br/>         Don't count</p> | Minor |
| 07 | The crack of<br>glass | <p>● Glass Crack:<br/>         7.1 Crack on the circuit of electrode terminal :</p>  <p>X<br/>         Y<br/>         Z</p> <p>Front<br/> <math>X \leq 1/5 a</math><br/> <math>Y \leq 1/2 D</math><br/> <math>Z \leq t</math></p> <p>Back</p> <p>Neglect</p>  | Minor |




◆ Specification :
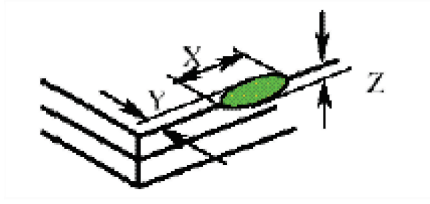
| NO | Item  | Criterion   | Level |
|----|---|---|-------|
| 07 | <p>The crack of glass</p> <p>X: The length of Crack</p> <p>Y: The width of crack</p> <p>Z: The thickness of crack</p> <p>D: terminal length</p> <p>T: The thickness of glass</p> <p>A : The length of glass</p> | <p>● Glass Crack:</p> <p>7.2 General glass crack and corner edge:</p> <p>7.2.1</p>  <p>X<br/>Y<br/>Z<br/>Neglect<br/>Out A area<br/>Neglect</p> <p>7.2.2</p>  <p>X<br/>Y<br/>Z<br/>Neglect<br/>Out A area<br/>Neglect</p> | Minor |
|    |   | <p>7.3 Glass remain:</p>  <p>X<br/>Y<br/>Neglect<br/><math>\leq 1/3 d</math></p>  | Minor |



◆ Specification :
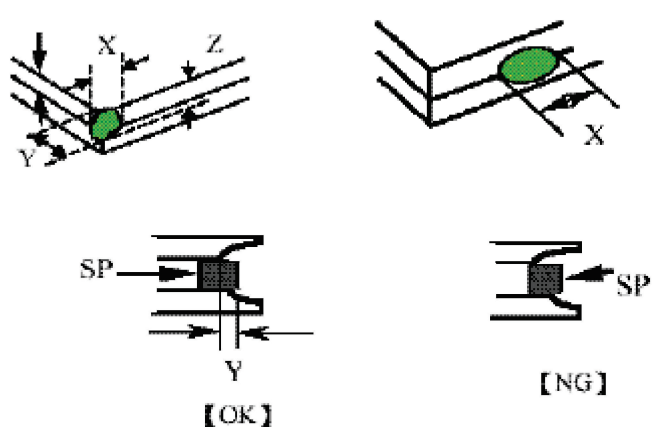
| NO | Item  | Criterion  | Level |
|----|---|--|-------|
| 07 | <p>The crack of glass</p> <p>X: The length of Crack</p> <p>Y: The width of crack</p> <p>Z: The thickness of crack</p> <p>D: terminal length</p> <p>T: The thickness of glass</p> <p>A : The length of glass</p> | <p>7.4 Corner crack and medial crack:</p>  <p style="text-align: center;"> <math>X</math><br/> <math>Y</math><br/> <math>Z</math><br/> <math>\cong 1/5a</math><br/>           Crack can't enter viewing area<br/> <math>\cong 1/2t</math><br/> <math>\cong 1/5a</math><br/>           Crack can't exceed the half of width of SP width of SP<br/> <math>1/2t &lt; Z \cong 2t</math> </p> | Minor |
| 08 | Backlight elements  | <p>8.1 Backlight can't work normally.</p> <p>8.2 Backlight doesn't light or color is wrong.</p> <p>8.3 Illumination source flickers when lit.</p>  | Major |
| 09 | General appearance  | <p>9.1 pin type must match type in specification sheet</p> <p>9.2 No short circuits in components on PCB or FPC</p> <p>9.3 Product packaging must the same as specified on packaging specification sheet.</p> <p>9.4 The folding and peeled off in polarizer are not acceptable</p> <p>9.5 The PCB or FPC between B/L assembled distance (PCB or FPC) is <math>\cong 1.5\text{mm}</math></p>   | Major |