
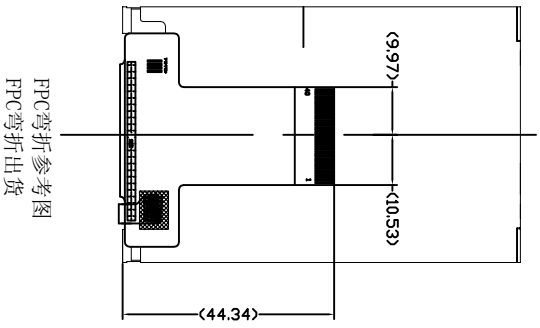
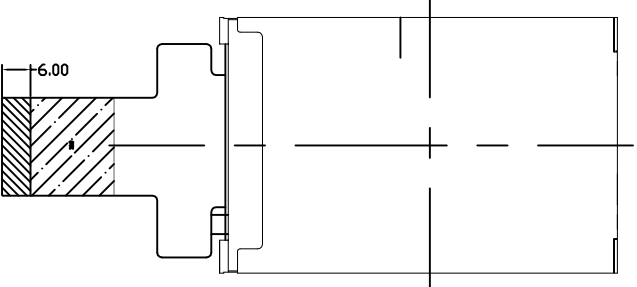



REV	DESCRIPTION	DATE
1.0	First release	20141101

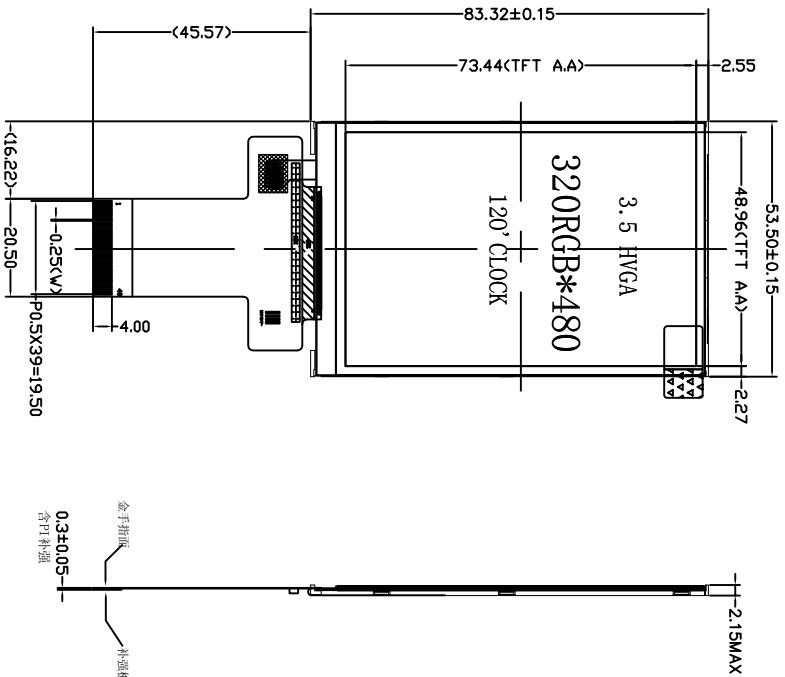

IME	IM1	IM0	INTERFACE	DATA PIN IN USE
0	1	0	8080 16 BIT	DB150J
0	1	1	8080 8BIT	DB70J
1	0	1	3-LINE SPI	SMA
1	1	1	4-LINE SPI	SMA
				40

REVISION RECORD

REV	DATE	TITLE: ASM OUTLINE	P/N:	SCALE: N.T.S.
1.0		FILE NAME: SX035HV005	Ver.: 1.0	
1.1		DRAWN BY: Gilbert	DATE: 20141101	UNIT: mm
1.2		CHECKED BY:	DATE:	PRO.(S):
1.3		APPROVED BY:	DATE:	SHEET: 1/1

- NOTES:
- 1.DISPLAY TYPE: TFT
 - 2.VIEWING DIRECTION: 12:00
 - 3.LCD DRIVE IC:ILI9486L
 - 4.POLARIZER MODE: TRANSMISSIVE/POSITIVE
 - 5.VCC:2.8V
 - 6.BACKLIGHT:6-CHIP WHITE LED PARALLEL
 - 7.OPERATING TEMP: -20°C~+70°C
 - 8.STORAGE TEMP: -30°C~+80°C
 - 9.UNMARKER TOLERANCE: ±0.20
 - 10.CONTROL DIMENSIONS: *