


可変コイル Adjustable Coils PIN Type K, M Series

K5-C




仕様/Specifications

- (1) 1~1,000 μ H
- (2) 0.1~20MHz
- (3) F: $\pm 2\%$
L: $\pm 5\%$
- (4) 10~10,000pF
- (5) 50~100

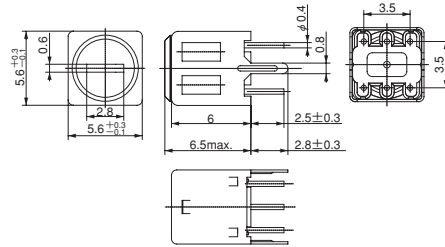


K7-D

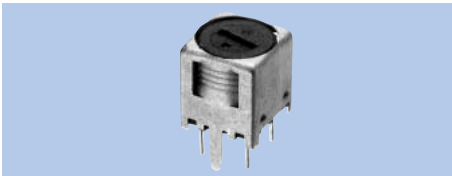


仕様/Specifications

- (1) 5~100mH
- (2) 10~300kHz
- (3) F: $\pm 2\%$
L: $\pm 5\%$
- (4) —
- (5) 50~80

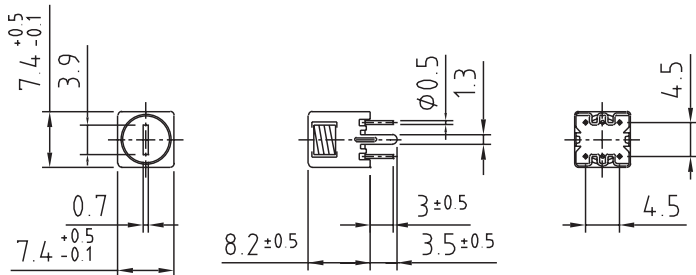


M5-H1

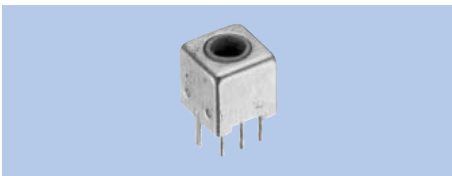

仕様/Specifications

- (1) 0.03~130 μ H
- (2) 10~200MHz
- (3) F: $\pm 2\%$
L: $\pm 4\%$
- (4) —
- (5) 30~80

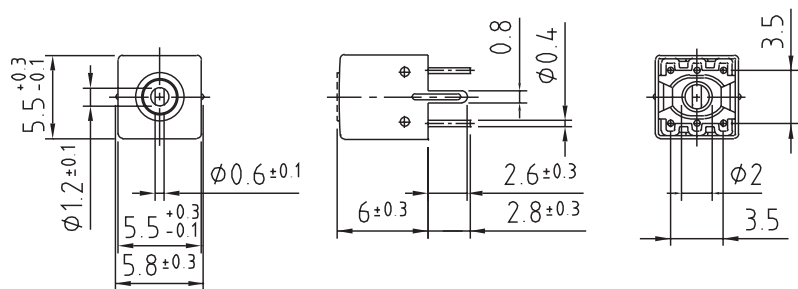

- (1) インダクタンス/Inductance
- (2) 使用周波数/Operational frequency
- (3) F&L可変範囲/Variable range of F & L
- (4) 内蔵可能容量/Internal capacitance
- (5) 無負荷 Q/Unloaded Q