
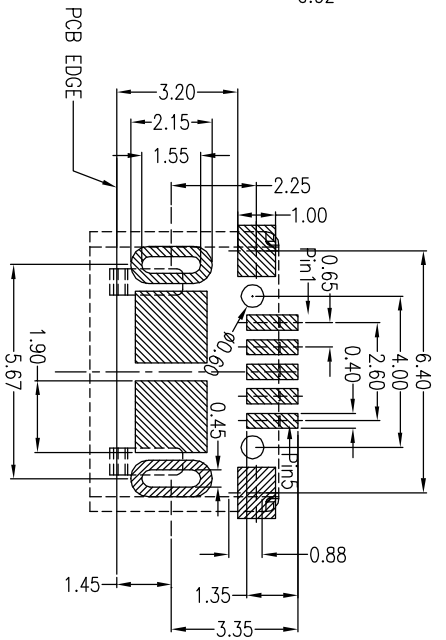
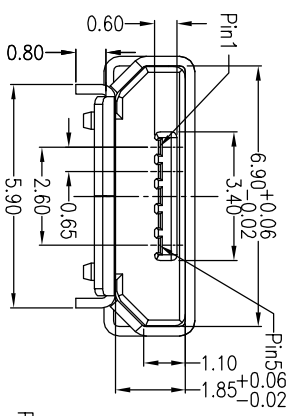

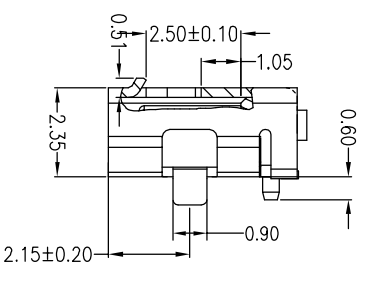
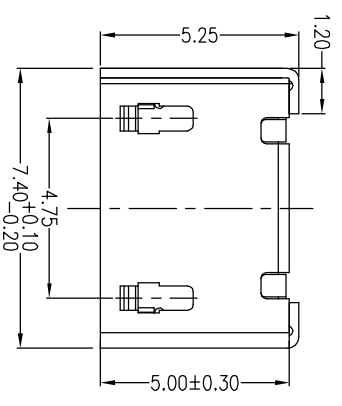
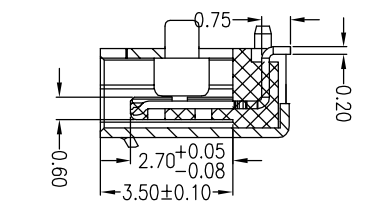


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE

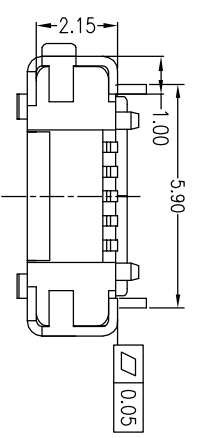

RECOMMENDED PCB LAYOUT

- Note:
- Material:
 - Housing: High temperature thermoplastic with g.f.U.L94V-0
 - Contact: copper alloy,t=0.20mm
 - Shell: copper alloy,t=0.25mm
 - Specification:
 - Current rating: 1 A Max. voltage: 100 V(ac) for 1 min.
 - Dielectric withstanding
 - Contact resistance: 50 mW Max.
 - Insulation resistance: 100 MW Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.
 - Temperature range: -30°C~80°C

A 01 S B 1 4 1 B 1-245

- 产品代号 A: 部品
- 产品系列 01: micro usb 5p in
- 产品类别 S: 母座
- 产品类型 B: B TYPE
- 外壳材质 1: C2980R-H
- 端子材质 4: S181R-B
- 主体材质 1: LP
- 主体颜色 B: 黑色
- 下板类型 1: dip(插板)
- 细节流水 2: S181R-B 1 Type Smt 焊接插板 转接元件

PART NO:	A01SB141B1-245	MATERIAL:	SEE NOTE
MODEL NO:	XX	FINISH:	SEE NOTE
UNIT:	MM	SIZE:	A4
TOLERANCE UNSPECIFIED	.x	DR:	xiaoyulong
	.xx	CHK:	
	.xxx	APP:	
	Ang.	SCALE:	5:1
		DATE:	2012.05.21
		REV:	A

TITLE: Micro usb 5s B Type Smt 有焊脚插板.9有柱无导位

DWG NO: A245

