
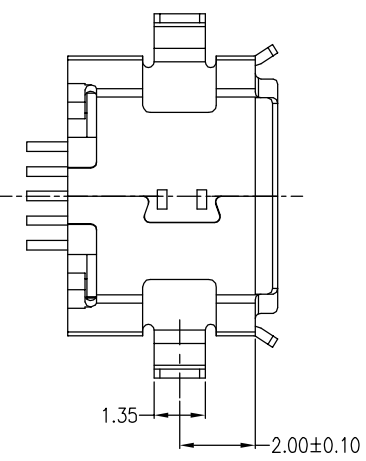
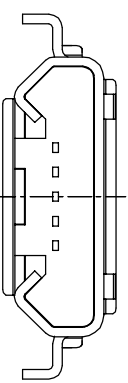

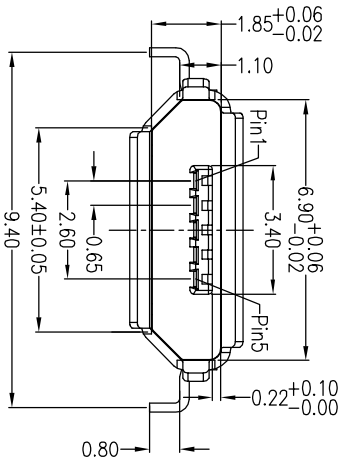

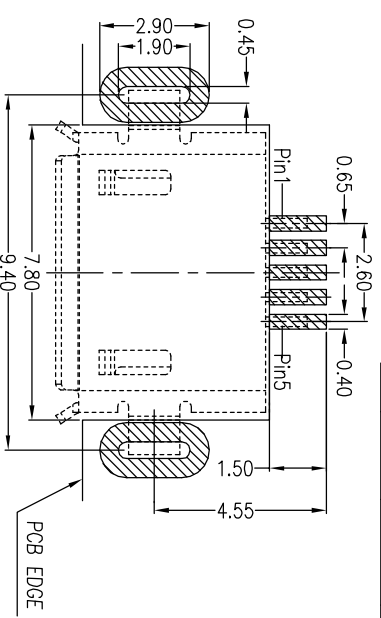


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE

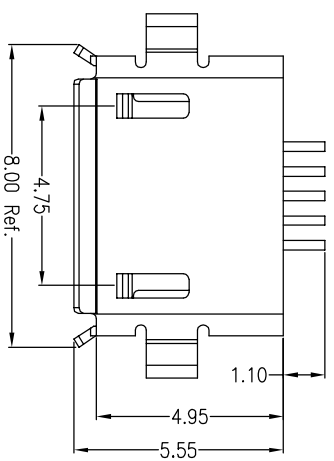

- Note:
1. Material:
  - 1.1 Housing: High temperature thermoplastic with g.f.Ul94V-0
  - 1.2 Contact: copper alloy,t=0.15mm
  - 1.3 Shell: copper alloy,t=0.25mm
- 2.Specification:
- 2.1 Current rating: 1 A Max. voltage: 100 V(ac) for 1 min.
  - 2.2 Dielectric withstanding
  - 2.3 Contact resistance: 50 mW Max.
  - 2.4 Insulation resistance: 100 MW Min.
  - 2.5 Total mating force: 3.57 Kgf Max.
  - 2.6 Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.
  - 2.7 Temperature range: -30°C~80°C

**A 01 S B 1 4 1 B 3-168**

- ① 产品代号 A: 成品
- ② 产品系列 01: micro usb 5pin
- ③ 产品类别 S: 母座
- ④ 产品类型 B: B TYPE
- ⑤ 外壳材料 1: 02800R-H
- ⑥ 端子材质 4: 05101E-B
- ⑦ 主体材质 1: LCP
- ⑧ 主体颜色 B: 黑色
- ⑨ 下板类型 3: 沉板式
- ⑩ 细节流水 10: Micro usb 5 B Type DIP沉板式10

PART NO: A01SB141B3-168	MATERIAL: SEE NOTE	TITLE: OL FUR 96VAE Type DIP6i. S	
MODEL NO: XX	FINSH: SEE NOTE	DWG NO: A168	REV: A
UNIT: MM	SIZE: A4	DR: xiayulong	SCALE: 5:1
TOLERANCE UNSPECIFIED .x 0.15 .xx 0.10 .xxx 0.05	COLOR: SEE NOTE	CHK: 	DATE: 2012.05.04
Ang.	APP: 		