
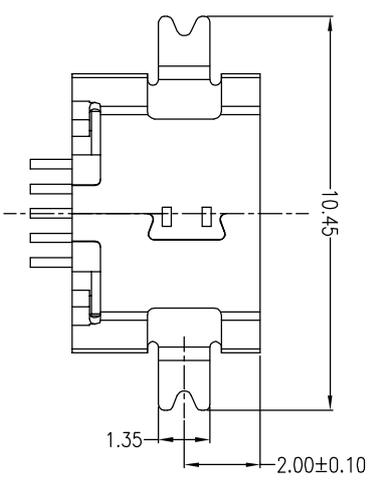
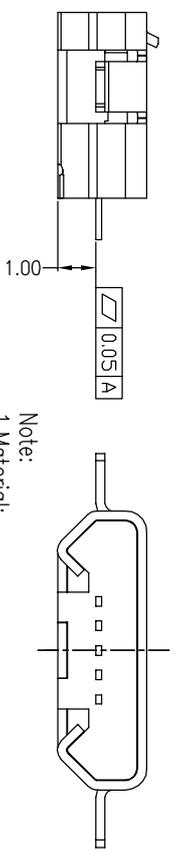
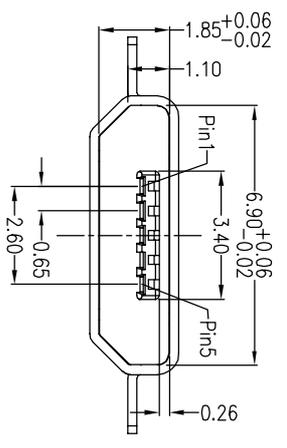

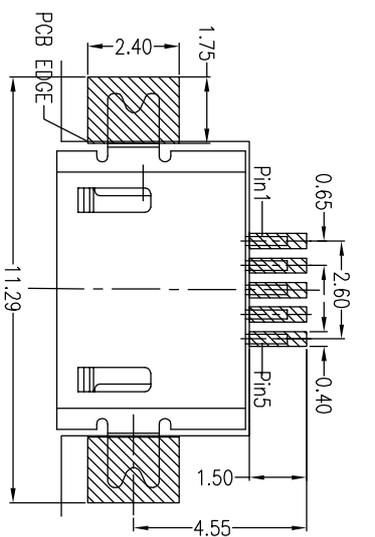


| REV. | ECN NO. | LOCATIONS | DESCRIPTION | DATE |
|------|---------|-----------|-------------|------|
| | | | | |

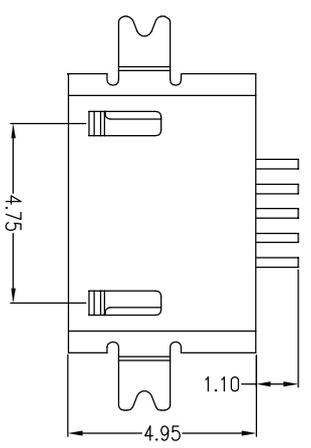

- Note:
- Material:
 - Housing: High temperature thermoplastic with g.f, UL94V-0
 - Contact: copper alloy, t=0.15mm
 - Shell: copper alloy, t=0.25mm
2. Specification:
- Current rating: 1 A Max. voltage: 100 V(ac) for 1 min.
 - Contact resistance: 50 mW Max.
 - Insulation resistance: 100 MW Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min. 0.81~2.05 Kgf Min.
 - Temperature range: -30°C~80°C

A 01 S B 1 4 1 B 3-297

- ① 产品代号 A: 精品
- ② 产品系列 01: micro usb 5p in
- ③ 产品类型 B: B TYPE
- ④ 外壳材料 1: 02800R-H
- ⑤ 主体材质 4: 05101R-BH
- ⑥ 主体颜色 B: 黑色
- ⑦ 下板类型 3: 沉板式
- ⑧ 细节流水 2: 11: micro usb 5p B Type 沉板式 05101R-BH
- ⑨ 主体材质 1: LCP
- ⑩ 主体颜色 B: 黑色
- ⑪ 下板类型 3: 沉板式
- ⑫ 细节流水 2: 11: micro usb 5p B Type 沉板式 05101R-BH

| | | | |
|---|----------|--------------------|--|
| PART NO: A01SB141B3-297 | | MATERIAL: SEE NOTE | |
| MODEL NO: XX | | FINISH: SEE NOTE | |
| UNIT: MM | SIZE: A4 | COLOR: SEE NOTE | |
| TOLERANCE UNSPECIFIED | | DR: xiyulong | |
| .x | 0.15 | CHK: | |
| .xx | 0.10 | APP: | |
| .xxx | 0.05 | SCALE: 5:1 | |
| Ang. | 1° | DATE: 2012.05.04 | |
| TITLE: Micro usb 5s B Type Smt脚沉板1.0无翻边 | | REV: A | |
| DWG NO: A297 | | REV: A | |