

Rev	ECN NO.	B.Y.	Date

A

B

C

D

E







A

B

C

D


E

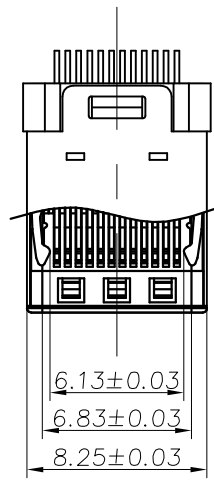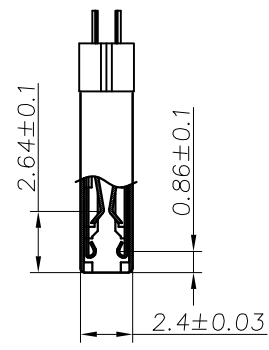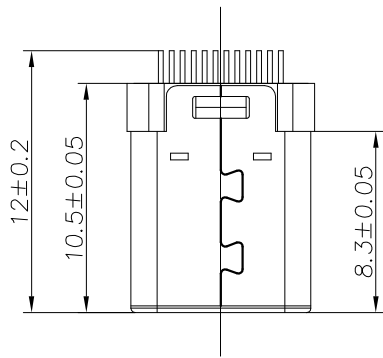

NOTES:

1. MATERIAL:  
 HOUSING: THERMOPLASTIC, UL94V-0, COLOR: BLACK  
 CONTACT: COPPER ALLOY  
 SHELL: STAINLESS STEEL  
 GUARD: STAINLESS STEEL  
 SPING: STAINLESS STEEL  
**PCB: FR4**  
 2. Finish:  
**CONTACT: 3u" Au GOLD PLATING ON CONTACT AREA**  
 GOLD FLASH PLATING ON SOLDER TAILS  
 80u"Min Ni UNDERPLATING OVER ALL  
 SHELL: 50u"Min Ni PLATING OVER ALL.

2. PRODUCT SPECIFICATION:  
 VOLATAGE RATING: 100V AC  
 INSULATION RESISTANCE: 100M  
 CONTACT RESISTANCE: 40mΩ  
 INSERT FORCE: 5-20N Max.  
 EXTRACT FORCE: 8-20N Min.  
 DURABILITY: 10000 CYCLES

- TOLERANCES - UNLESS OTHERWISE SPECIFIED		 Title: USB TYPE-C 夹板公头					
				P/N: LA2.025.029			
0.=±.20	0°=±1.5°	Appd: ZHJ	Date	Scale	Unit	Type	Page
0.0=±.10	0.0°=±1.0°	Check: LWJ	2016.01.13	Free	MM	Z	1/2
0.00=±.05	0.00°=±0.5°	Draw.: YHG					