




RoHS  
Compliant  
2002/95/EC


REV	LTR	DESCRIPTION	DATE	REVISER	APPD

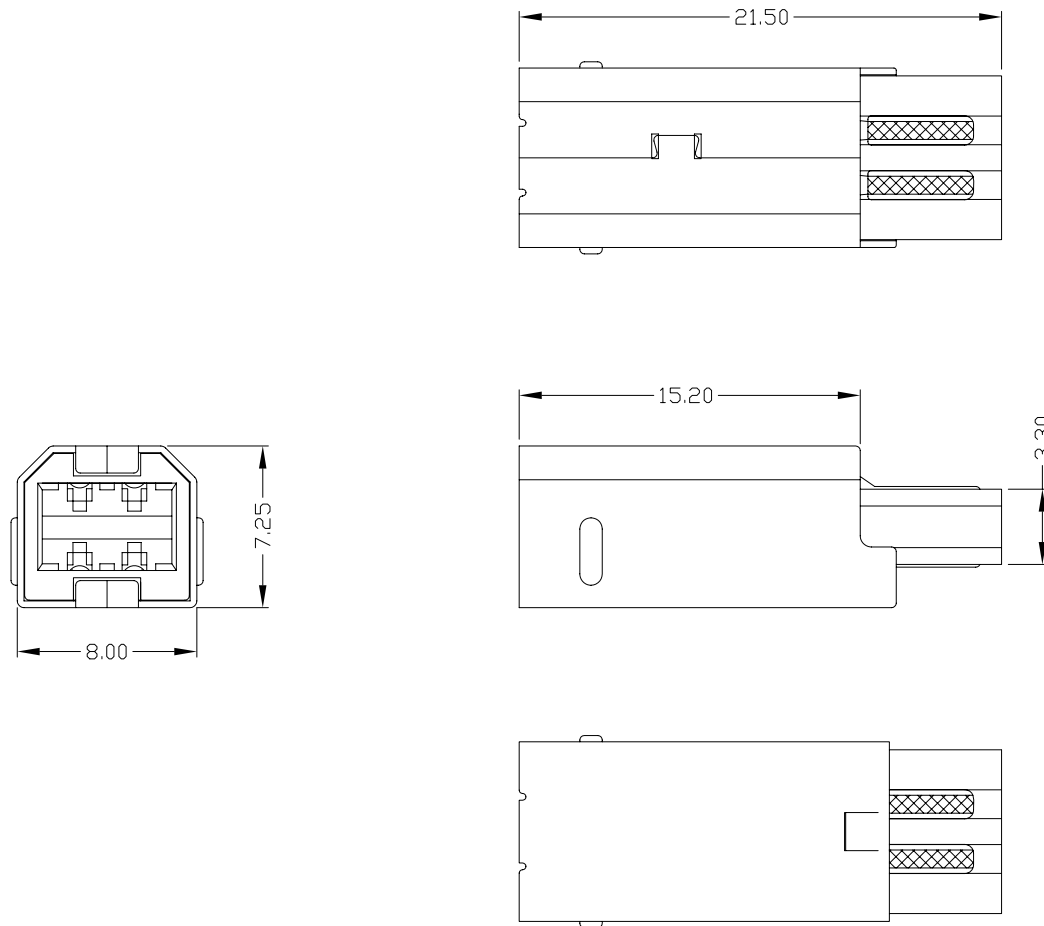

NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 2AMP, 30V DC;
  - INSULATION RESISTANCE: 1000MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 500V AC;
  - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
- PART NO.

USBM-04\*N-1\*S83



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING											
3	HOUSING	PBT+30%GF	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS	mm	雅安科技有限公司 <b>ACCURATE INNOTECH INC.</b> TITLE: USB BM 焊线短体式      PART NO.: USBM-04*N-1*S83 DR: gan 2013/4/11      DWG NO.: AII-S83 CHKD: gan 2013/4/11 APPD:						
2	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X* ±1*	MAT'L	SEE NOTE							
1	TERMINAL	COPPER ALLOY	4	Plated Gold in Mating Area; Tin on Solder Tails	.XX ±0.25	.XX*	FINISH	SEE NOTE							
					.XXX ±0.15	.XXX*	Q'TY								
					<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.</small>					SCALE	SHEET	REV.	CUSTOMER		
										1:1	1/1	B	DRAWING		