

KY シリーズ

低 Z

長寿命

RoHS指令
適合品

- 低抵抗電解液の採用により低ESR・低インピーダンスを実現。
- 105℃ 4,000 ～ 10,000 時間保証。（リプル重畳）
- 基板洗浄タイプではありませんのでご注意ください。




◆規格表

項 目	性 能										
カテゴリ温度範囲	-40～+105℃										
定格電圧範囲	6.3～100V _{dc}										
静電容量許容差	±20% (M) (20℃、120Hz)										
漏れ電流	I=0.01CVまたは3μAのうちいずれか大なる値以下 I: 漏れ電流(μA)、C: 静電容量(μF)、V: 定格電圧(V _{dc}) (20℃、2分値)										
損失角の正接(tan δ)	定格電圧 (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V	
	tan δ (Max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.09	0.08	
	但し、1,000μFを超えるものについては1,000μF増す毎に0.02を加えた値とする (20℃、120Hz)										
温度特性 (インピーダンス比) 右表の値以下	定格電圧 (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V	(120Hz)
	Z(-25℃)/Z(+20℃)	4	3	2	2	2	2	2	2	2	
	Z(-40℃)/Z(+20℃)	8	6	4	3	3	3	3	3	3	
耐久性	105℃において定格電圧を超えない範囲で規定の定格リプル電流を重畳して、規定時間電圧印加後、20℃に復帰させ測定を行ったとき、下記を満足すること										
	定格電圧 (V _{dc})	6.3 ～ 10V						16 ～ 100V			
	規定時間	φ5、φ6.3:4,000 時間 φ8、10:6,000 時間 φ12.5 以上:8,000 時間						φ5、φ6.3:5,000 時間 φ8、10:7,000 時間 φ12.5 以上:10,000 時間			
	静電容量変化率	初期値の ±25% 以内									
	損失角の正接	初期規格値の 200% 以下									
	漏れ電流	初期規格値以下									
高温無負荷特性	105℃において電圧を印加せず500時間放置後、20℃に復帰させ試験前処理 (JIS C 5101-4 4.1項) の後、測定を行ったとき、下記を満足すること										
	静電容量変化率	初期値の ±25% 以内									
	損失角の正接	初期規格値の 200% 以下									
	漏れ電流	初期規格値以下									


◆寸法図（CE04 形）[mm]

●端子コード：E

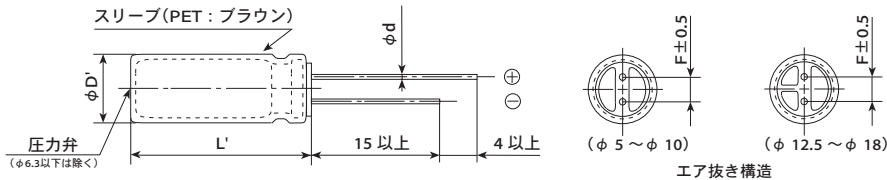

φD	5	6.3	8	10	12.5	16	18
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φD'	φD+0.5以下						
L'	L+1.5以下						

◆品番体系

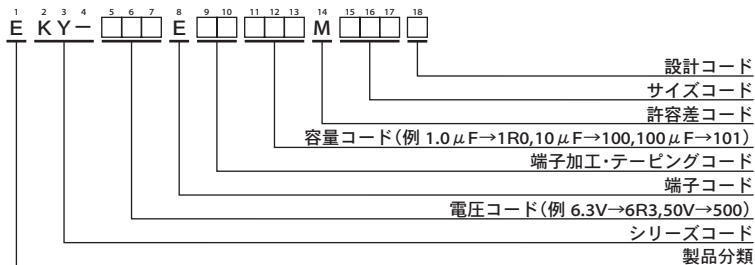

品番コードの詳細は「品番の表し方(リード形)」をご参照下さい。

◆標準品一覧表

WV (Vdc)	Cap (μF)	ケース サイズ φD×L(mm)	インピーダンス (Ω max/100kHz)		定格 リップル 電流 (mA rms/ 105℃、 100kHz)	品番
			20℃	-10℃		
6.3	150	5×11	0.58	2.3	210	EKY-6R3E□□151ME11D
	330	6.3×11	0.22	0.87	340	EKY-6R3E□□331MF11D
	680	8×11.5	0.13	0.52	640	EKY-6R3E□□681MHB5D
	820	10×12.5	0.080	0.32	865	EKY-6R3E□□821MJC5S
	1,000	8×15	0.087	0.35	840	EKY-6R3E□□102MH15D
	1,200	8×20	0.069	0.27	1,050	EKY-6R3E□□122MH20D
	1,200	10×16	0.060	0.24	1,210	EKY-6R3E□□122MJ16S
	1,500	10×20	0.046	0.18	1,400	EKY-6R3E□□152MJ20S
	1,800	12.5×15	0.049	0.16	1,450	EKY-6R3E□□182MK15S
	2,200	10×25	0.042	0.17	1,650	EKY-6R3E□□222MJ25S
	2,700	10×30	0.031	0.12	1,910	EKY-6R3E□□272MJ30S
	2,700	16×15	0.042	0.12	1,940	EKY-6R3E□□272ML15S
	3,300	12.5×20	0.035	0.12	1,900	EKY-6R3E□□332MK20S
	3,900	12.5×25	0.027	0.089	2,230	EKY-6R3E□□392MK25S
	3,900	18×15	0.043	0.11	2,210	EKY-6R3E□□392MM15S
	4,700	12.5×30	0.024	0.078	2,650	EKY-6R3E□□472MK30S
	5,600	12.5×35	0.020	0.065	2,880	EKY-6R3E□□562MK35S
	5,600	16×20	0.027	0.078	2,530	EKY-6R3E□□562ML20S
	6,800	12.5×40	0.017	0.056	3,350	EKY-6R3E□□682MK40S
	6,800	16×25	0.021	0.060	2,930	EKY-6R3E□□682ML25S
	6,800	18×20	0.026	0.067	2,860	EKY-6R3E□□682MM20S
10	8,200	16×31.5	0.017	0.050	3,450	EKY-6R3E□□822MLN3S
	10,000	16×35.5	0.015	0.044	3,610	EKY-6R3E□□103MLP1S
	10,000	18×25	0.019	0.049	3,140	EKY-6R3E□□103MM25S
	12,000	16×40	0.013	0.038	4,080	EKY-6R3E□□123ML40S
	12,000	18×31.5	0.015	0.040	4,170	EKY-6R3E□□123MMN3S
	15,000	18×35.5	0.014	0.038	4,220	EKY-6R3E□□153MMP1S
	18,000	18×40	0.012	0.032	4,280	EKY-6R3E□□183MM40S
	100	5×11	0.58	2.3	210	EKY-100E□□101ME11D
	220	6.3×11	0.22	0.87	340	EKY-100E□□221MF11D
	470	8×11.5	0.13	0.52	640	EKY-100E□□471MHB5D
	680	8×15	0.087	0.35	840	EKY-100E□□681MH15D
	680	10×12.5	0.080	0.32	865	EKY-100E□□681MJC5S
	1,000	8×20	0.069	0.27	1,050	EKY-100E□□102MH20D
	1,000	10×16	0.060	0.24	1,210	EKY-100E□□102MJ16S
	1,200	10×20	0.046	0.18	1,400	EKY-100E□□122MJ20S
	1,500	10×25	0.042	0.17	1,650	EKY-100E□□152MJ25S
	1,500	12.5×15	0.049	0.16	1,450	EKY-100E□□152MK15S
	2,200	10×30	0.031	0.12	1,910	EKY-100E□□222MJ30S
	2,200	12.5×20	0.035	0.12	1,900	EKY-100E□□222MK20S
	2,200	16×15	0.042	0.12	1,940	EKY-100E□□222ML15S
	2,700	18×15	0.043	0.11	2,210	EKY-100E□□272MM15S
16	3,300	12.5×25	0.027	0.089	2,230	EKY-100E□□332MK25S
	3,900	12.5×30	0.024	0.078	2,650	EKY-100E□□392MK30S
	3,900	16×20	0.027	0.078	2,530	EKY-100E□□392ML20S
	4,700	12.5×35	0.020	0.065	2,880	EKY-100E□□472MK35S
	5,600	12.5×40	0.017	0.056	3,350	EKY-100E□□562MK40S
	5,600	16×25	0.021	0.060	2,930	EKY-100E□□562ML25S
	5,600	18×20	0.026	0.067	2,860	EKY-100E□□562MM20S
	6,800	16×31.5	0.017	0.050	3,450	EKY-100E□□682MLN3S
	6,800	18×25	0.019	0.049	3,140	EKY-100E□□682MM25S
	8,200	16×35.5	0.015	0.044	3,610	EKY-100E□□822MLP1S
	8,200	18×31.5	0.015	0.040	4,170	EKY-100E□□822MMN3S
	10,000	16×40	0.013	0.038	4,080	EKY-100E□□103ML40S
	10,000	18×35.5	0.014	0.038	4,220	EKY-100E□□103MMP1S
	12,000	18×40	0.012	0.032	4,280	EKY-100E□□123MM40S
	56	5×11	0.58	2.3	210	EKY-160E□□560ME11D
	120	6.3×11	0.22	0.87	340	EKY-160E□□121MF11D
	330	8×11.5	0.13	0.52	640	EKY-160E□□331MHB5D
	470	8×15	0.087	0.35	840	EKY-160E□□471MH15D
	470	10×12.5	0.080	0.32	865	EKY-160E□□471MJC5S
	680	8×20	0.069	0.27	1,050	EKY-160E□□681MH20D
6.3	680	10×16	0.060	0.24	1,210	EKY-160E□□681MJ16S
	1,000	10×20	0.046	0.18	1,400	EKY-160E□□102MJ20S
	1,000	12.5×15	0.049	0.16	1,450	EKY-160E□□102MK15S
	1,200	10×25	0.042	0.17	1,650	EKY-160E□□122MJ25S
	1,500	10×30	0.031	0.12	1,910	EKY-160E□□152MJ30S
	1,500	12.5×20	0.035	0.12	1,900	EKY-160E□□152MK20S
	1,500	16×15	0.042	0.12	1,940	EKY-160E□□152ML15S
	1,800	12.5×25	0.027	0.089	2,230	EKY-160E□□182MK25S
	2,200	12.5×30	0.024	0.078	2,650	EKY-160E□□222MK30S
	2,200	16×20	0.027	0.078	2,530	EKY-160E□□222ML20S
	2,700	12.5×35	0.020	0.065	2,880	EKY-160E□□272MK35S
	3,300	12.5×40	0.017	0.056	3,350	EKY-160E□□332MK40S
	3,900	16×25	0.021	0.060	2,930	EKY-160E□□392ML25S
	3,900	18×20	0.026	0.067	2,860	EKY-160E□□392MM20S
	4,700	16×31.5	0.017	0.050	3,450	EKY-160E□□472MLN3S
	4,700	18×25	0.019	0.049	3,140	EKY-160E□□472MM25S
	5,600	16×35.5	0.015	0.044	3,610	EKY-160E□□562MLP1S
	5,600	18×31.5	0.015	0.040	4,170	EKY-160E□□562MMN3S
	6,800	16×40	0.013	0.038	4,080	EKY-160E□□682ML40S
	8,200	18×35.5	0.014	0.038	4,220	EKY-160E□□822MMP1S
16	10,000	18×40	0.012	0.032	4,280	EKY-160E□□103MM40S
	47	5×11	0.58	2.3	210	EKY-250E□□470ME11D
	100	6.3×11	0.22	0.87	340	EKY-250E□□101MF11D
	220	8×11.5	0.13	0.52	640	EKY-250E□□221MHB5D
	330	8×15	0.087	0.35	840	EKY-250E□□331MH15D
	330	10×12.5	0.080	0.32	865	EKY-250E□□331MJC5S
	470	8×20	0.069	0.27	1,050	EKY-250E□□471MH20D
	470	10×16	0.060	0.24	1,210	EKY-250E□□471MJ16S
	680	10×20	0.046	0.18	1,400	EKY-250E□□681MJ20S
	680	12.5×15	0.049	0.16	1,450	EKY-250E□□681MK15S
	820	10×25	0.042	0.17	1,650	EKY-250E□□821MJ25S
	1,000	10×30	0.031	0.12	1,910	EKY-250E□□102MJ30S
	1,000	12.5×20	0.035	0.12	1,900	EKY-250E□□102MK20S
	1,000	16×15	0.042	0.12	1,940	EKY-250E□□102ML15S
	1,200	18×15	0.043	0.11	2,210	EKY-250E□□122MM15S
	1,500	12.5×25	0.027	0.089	2,230	EKY-250E□□152MK25S
	1,800	12.5×30	0.024	0.078	2,650	EKY-250E□□182MK30S
	1,800	16×20	0.027	0.078	2,530	EKY-250E□□182ML20S
	2,200	12.5×35	0.020	0.065	2,880	EKY-250E□□222MK35S
	2,200	18×20	0.026	0.067	2,860	EKY-250E□□222MM20S
25	2,700	12.5×40	0.017	0.056	3,350	EKY-250E□□272MK40S
	2,700	16×25	0.021	0.060	2,930	EKY-250E□□272ML25S
	3,300	16×31.5	0.017	0.050	3,450	EKY-250E□□332MLN3S
	3,300	18×25	0.019	0.049	3,140	EKY-250E□□332MM25S
	3,900	16×35.5	0.015	0.044	3,610	EKY-250E□□392MLP1S
	3,900	18×31.5	0.015	0.040	4,170	EKY-250E□□392MMN3S
	4,700	16×40	0.013	0.038	4,080	EKY-250E□□472ML40S
	4,700	18×35.5	0.014	0.038	4,220	EKY-250E□□472MMP1S
	5,600	18×40	0.012	0.032	4,280	EKY-250E□□562MM40S
	33	5×11	0.58	2.3	210	EKY-350E□□330ME11D
	56	6.3×11	0.22	0.87	340	EKY-350E□□560MF11D
	150	8×11.5	0.13	0.52	640	EKY-350E□□151MHB5D
	220	8×15	0.087	0.35	840	EKY-350E□□221MH15D
	220	10×12.5	0.080	0.32	865	EKY-350E□□221MJC5S
	270	8×20	0.069	0.27	1,050	EKY-350E□□271MH20D
	330	10×16	0.060	0.24	1,210	EKY-350E□□331MJ16S
	470	10×20	0.046	0.18	1,400	EKY-350E□□471MJ20S
	470	12.5×15	0.049	0.16	1,450	EKY-350E□□471MK15S
	560	10×25	0.042	0.17	1,650	EKY-350E□□561MJ25S
	680	10×30	0.031	0.12	1,910	EKY-350E□□681MJ30S
	680	12.5×20	0.035	0.12	1,900	EKY-350E□□681MK20S
35	680	16×15	0.042	0.12	1,940	EKY-350E□□681ML15S
	1,000	12.5×25	0.027	0.089	2,230	EKY-350E□□102MK25S
	1,000	18×15	0.043	0.11	2,210	EKY-350E□□102MM15S
	1,200	12.5×30	0.024	0.078	2,650	EKY-350E□□122MK30S
	1,200	16×20	0.027	0.078	2,530	EKY-350E□□122ML20S
	1,500	12.5×35	0.020	0.065	2,880	EKY-350E□□152MK35S
	1,800	12.5×40	0.017	0.056	3,350	EKY-350E□□182MK40S
	1,800	16×25	0.021	0.060	2,930	EKY-350E□□182ML25S
	1,800	18×20	0.026	0.067	2,860	EKY-350E□□182MM20S
	2,200	16×31.5	0.017	0.050	3,450	EKY-350E□□222MLN3S

□□には端子加工・テーピングコードが入ります。

記載内容は予告なく変更する場合があります。ご購入、ご使用の際は当社の納入仕様書をご要求下さい。本カタログと納入仕様書の記載内容に基づいてご使用下さい。

◆標準品一覧表

WV (Vdc)	Cap (μF)	ケース サイズ φD×L(mm)	インピーダンス (Ω max/100kHz)		定格 リプル 電流 (mA rms/ 105℃、 100kHz)	品番
			20℃	-10℃		
35	2,200	18×25	0.019	0.049	3,140	EKY-350E□□222MM25S
	2,700	16×35.5	0.015	0.044	3,610	EKY-350E□□272MLP1S
	2,700	18×31.5	0.015	0.040	4,170	EKY-350E□□272MMN3S
	3,300	16×40	0.013	0.038	4,080	EKY-350E□□332ML40S
	3,300	18×35.5	0.014	0.038	4,220	EKY-350E□□332MMP1S
	3,900	18×40	0.012	0.032	4,280	EKY-350E□□392MM40S
50	1.0	5×11	4.0	16.0	30	EKY-500E□□1R0ME11D
	2.2	5×11	2.5	10.0	43	EKY-500E□□2R2ME11D
	3.3	5×11	2.2	8.8	53	EKY-500E□□3R3ME11D
	4.7	5×11	1.9	7.6	88	EKY-500E□□4R7ME11D
	10	5×11	1.5	6.0	100	EKY-500E□□100ME11D
	22	5×11	0.70	2.8	180	EKY-500E□□220ME11D
	56	6.3×11	0.30	1.2	295	EKY-500E□□560MF11D
	100	8×11.5	0.17	0.68	555	EKY-500E□□101MHB5D
	120	8×15	0.12	0.48	730	EKY-500E□□121MH15D
	150	10×12.5	0.12	0.48	760	EKY-500E□□151MJC5S
	180	8×20	0.091	0.36	910	EKY-500E□□181MH20D
	220	10×16	0.084	0.34	1,050	EKY-500E□□221MJ16S
	270	10×20	0.060	0.24	1,220	EKY-500E□□271MJ20S
	270	12.5×15	0.061	0.20	1,260	EKY-500E□□271MK15S
	330	10×25	0.055	0.22	1,440	EKY-500E□□331MJ25S
	470	10×30	0.043	0.17	1,690	EKY-500E□□471MJ30S
	470	12.5×20	0.045	0.15	1,660	EKY-500E□□471MK20S
	470	16×15	0.055	0.17	1,690	EKY-500E□□471ML15S
	560	12.5×25	0.034	0.11	1,950	EKY-500E□□561MK25S
	560	18×15	0.054	0.15	1,930	EKY-500E□□561MM15S
	680	12.5×30	0.030	0.10	2,310	EKY-500E□□681MK30S
	820	12.5×35	0.025	0.083	2,510	EKY-500E□□821MK35S
	820	16×20	0.034	0.10	2,210	EKY-500E□□821ML20S
	1,000	12.5×40	0.021	0.069	2,920	EKY-500E□□102MK40S
	1,000	16×25	0.025	0.075	2,555	EKY-500E□□102ML25S
	1,000	18×20	0.036	0.097	2,490	EKY-500E□□102MM20S
	1,200	16×31.5	0.022	0.066	3,010	EKY-500E□□122MLN3S
	1,200	18×25	0.026	0.070	2,740	EKY-500E□□122MM25S
	1,500	16×35.5	0.019	0.057	3,150	EKY-500E□□152MLP1S
	1,800	16×40	0.016	0.048	3,710	EKY-500E□□182ML40S
	1,800	18×31.5	0.021	0.057	3,635	EKY-500E□□182MMN3S
	2,200	18×35.5	0.017	0.046	3,680	EKY-500E□□222MMP1S
	2,700	18×40	0.014	0.038	3,800	EKY-500E□□272MM40S
63	15	5×11	0.88	3.5	165	EKY-630E□□150ME11D
	33	6.3×11	0.35	1.4	265	EKY-630E□□330MF11D
	56	8×11.5	0.22	0.88	500	EKY-630E□□560MHB5D
	82	8×15	0.16	0.64	665	EKY-630E□□820MH15D
	82	10×12.5	0.11	0.44	690	EKY-630E□□820MJC5S
	120	8×20	0.12	0.48	820	EKY-630E□□121MH20D
	120	10×16	0.076	0.31	950	EKY-630E□□121MJ16S
	180	10×20	0.056	0.23	1,150	EKY-630E□□181MJ20S
	180	12.5×16	0.072	0.29	1,150	EKY-630E□□181MK16S
	220	10×25	0.046	0.19	1,350	EKY-630E□□221MJ25S
	270	12.5×20	0.041	0.13	1,500	EKY-630E□□271MK20S
	390	12.5×25	0.031	0.093	1,900	EKY-630E□□391MK25S
	470	12.5×30	0.028	0.084	2,300	EKY-630E□□471MK30S
	470	16×20	0.032	0.096	2,000	EKY-630E□□471ML20S
	560	12.5×35	0.024	0.072	2,500	EKY-630E□□561MK35S
	680	12.5×40	0.021	0.063	2,800	EKY-630E□□681MK40S
63	680	16×25	0.025	0.075	2,600	EKY-630E□□681ML25S
	680	18×20	0.030	0.090	2,500	EKY-630E□□681MM20S
	820	16×31.5	0.021	0.063	2,850	EKY-630E□□821MLN3S
	820	18×25	0.024	0.072	2,800	EKY-630E□□821MM25S
	1,000	16×35.5	0.019	0.057	2,900	EKY-630E□□102MLP1S
	1,200	16×40	0.018	0.054	3,400	EKY-630E□□122ML40S
	1,200	18×31.5	0.020	0.060	3,300	EKY-630E□□122MMN3S
	1,500	18×35.5	0.018	0.054	3,400	EKY-630E□□152MMP1S
	1,800	18×40	0.017	0.051	3,500	EKY-630E□□182MM40S
	68	10×12.5	0.17	0.66	480	EKY-800E□□680MJC5S
	100	10×16	0.11	0.47	600	EKY-800E□□101MJ16S
	120	10×20	0.084	0.34	800	EKY-800E□□121MJ20S
80	150	10×25	0.069	0.28	900	EKY-800E□□151MJ25S
	150	12.5×16	0.11	0.34	750	EKY-800E□□151MK16S
	220	12.5×20	0.062	0.18	1,100	EKY-800E□□221MK20S
	330	12.5×25	0.047	0.14	1,250	EKY-800E□□331MK25S
	330	16×20	0.048	0.15	1,350	EKY-800E□□331ML20S
	390	12.5×30	0.042	0.13	1,500	EKY-800E□□391MK30S
	470	12.5×35	0.036	0.11	1,650	EKY-800E□□471MK35S
	470	16×25	0.038	0.12	1,700	EKY-800E□□471ML25S
	470	18×20	0.045	0.14	1,500	EKY-800E□□471MM20S
	560	12.5×40	0.032	0.095	1,800	EKY-800E□□561MK40S
	680	16×31.5	0.032	0.095	1,850	EKY-800E□□681MLN3S
	680	18×25	0.036	0.11	1,750	EKY-800E□□681MM25S
100	820	16×35.5	0.029	0.086	2,000	EKY-800E□□821MLP1S
	820	18×31.5	0.030	0.090	1,900	EKY-800E□□821MMN3S
	1,000	16×40	0.027	0.081	2,200	EKY-800E□□102ML40S
	1,000	18×35.5	0.027	0.081	2,200	EKY-800E□□102MMP1S
	1,200	18×40	0.026	0.077	2,700	EKY-800E□□122MM40S
	6.8	5×11	1.4	5.6	125	EKY-101E□□6R8ME11D
	15	6.3×11	0.57	2.3	205	EKY-101E□□150MF11D
	27	8×11.5	0.36	1.4	355	EKY-101E□□270MHB5D
	39	8×15	0.25	1.0	450	EKY-101E□□390MH15D
	47	10×12.5	0.17	0.66	480	EKY-101E□□470MJC5S
	56	8×20	0.19	0.76	565	EKY-101E□□560MH20D
	68	10×16	0.11	0.47	600	EKY-101E□□680MJ16S
100	82	10×20	0.084	0.34	800	EKY-101E□□820MJ20S
	100	12.5×16	0.11	0.34	750	EKY-101E□□101MK16S
	120	10×25	0.069	0.28	900	EKY-101E□□121MJ25S
	150	12.5×20	0.062	0.18	1,100	EKY-101E□□151MK20S
	220	12.5×25	0.047	0.14	1,250	EKY-101E□□221MK25S
	220	16×20	0.048	0.15	1,350	EKY-101E□□221ML20S
	270	12.5×30	0.042	0.13	1,500	EKY-101E□□271MK30S
	330	12.5×35	0.036	0.11	1,650	EKY-101E□□331MK35S
	330	16×25	0.038	0.12	1,700	EKY-101E□□331ML25S
	330	18×20	0.045	0.14	1,500	EKY-101E□□331MM20S
	390	12.5×40	0.032	0.095	1,800	EKY-101E□□391MK40S
	470	16×31.5	0.032	0.095	1,850	EKY-101E□□471MLN3S
100	470	18×25	0.036	0.11	1,750	EKY-101E□□471MM25S
	560	16×35.5	0.029	0.086	2,000	EKY-101E□□561MLP1S
	560	18×31.5	0.030	0.090	1,900	EKY-101E□□561MMN3S
	680	16×40	0.027	0.081	2,200	EKY-101E□□681ML40S
	680	18×35.5	0.027	0.081	2,200	EKY-101E□□681MMP1S
	820	18×40	0.026	0.077	2,700	EKY-101E□□821MM40S

□□には端子加工・テーピングコードが入ります。

◆定格リプル電流周波数補正係数

リプル周波数が標準品一覧表の規定値と異なる場合は、下表の係数を乗じた値以下でご利用下さい。

●周波数補正係数

周波数 (Hz)	120	1k	10k	100k
1.0~180	0.40	0.75	0.90	1.00
220~560	0.50	0.85	0.94	1.00
680~1,800	0.60	0.87	0.95	1.00
2,200~3,900	0.75	0.90	0.95	1.00
4,700 ~	0.85	0.95	0.98	1.00

※アルミ電解コンデンサの劣化はリプル電流重量による自己発熱温度上昇により、5℃上昇するごとに2 倍の寿命加速となります。

長寿命を期待する場合はリプル電流を低減してご利用下さい。