

SMD Inductors(Coils)

For Power Line(Wound, Magnetic Shielded)


Conformity to RoHS Directive

VLF Series VLF3012A


FEATURES

- Miniature size
Mount area: 2.6×2.8mm
Low profile: 1.2mm max. height
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products contain no lead and also support lead-free soldering.
- It is a product conforming to RoHS directive.

SHAPES AND DIMENSIONS

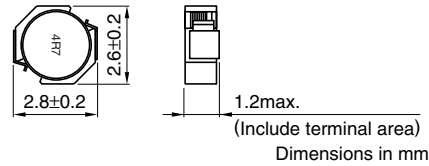

RECOMMENDED PC BOARD PATTERN



APPLICATIONS

Power source inductor for mobile devices such as mobile phones, HDDs, and DSCs

ELECTRICAL CHARACTERISTICS

Part No.	Inductance [at 1/2 I _{dc1}] ^{*2} (μH)	Inductance tolerance(%)	Test frequency (kHz)	DC resistance(Ω)		Rated current ^{*1} (A)	
				max.	typ.	Based on inductance change I _{dc1} max.	Based on temperature rise I _{dc2} typ.
VLF3012AT-1R5N1R2	1.5	±30	100	0.068	0.059	1.2	1.6
VLF3012AT-2R2M1R0	2.2	±20	100	0.1	0.088	1.0	1.3
VLF3012AT-3R3MR87	3.3	±20	100	0.13	0.11	0.87	1.2
VLF3012AT-4R7MR74	4.7	±20	100	0.19	0.16	0.74	0.98
VLF3012AT-6R8MR59	6.8	±20	100	0.27	0.23	0.59	0.83
VLF3012AT-100MR49	10	±20	100	0.41	0.36	0.49	0.67
VLF3012AT-150MR41	15	±20	100	0.62	0.54	0.41	0.54
VLF3012AT-220MR33	22	±20	100	0.76	0.66	0.33	0.49
VLF3012AT-330MR27	33	±20	100	1.3	1.1	0.27	0.38
VLF3012AT-470MR22	47	±20	100	2.2	1.9	0.22	0.29

*1 Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.


*2 Inductance is at 1/2 I_{dc1} power distribution. The L value at 0A is higher than the guaranteed performance.

- Operating temperature range: -40 to +105°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLF3012AT-1R5N1R2

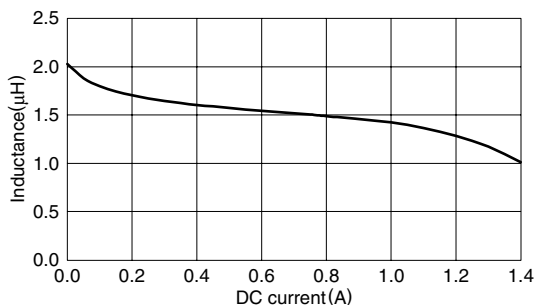


VLF3012AT-2R2M1R0

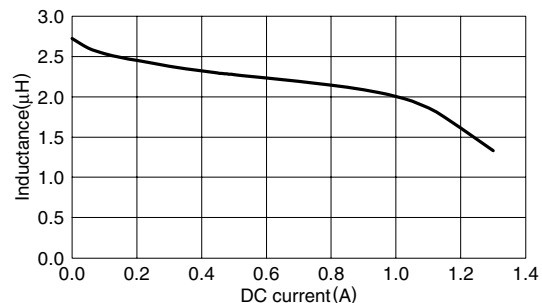


- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

- All specifications are subject to change without notice.


TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS
VLF3012AT-3R3MR87

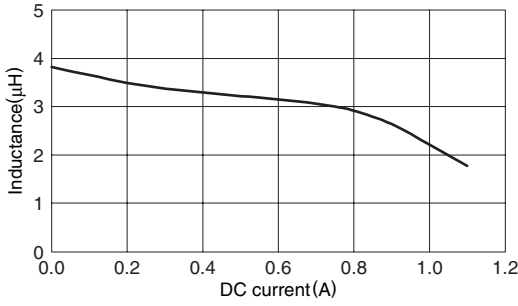


VLF3012AT-4R7MR74

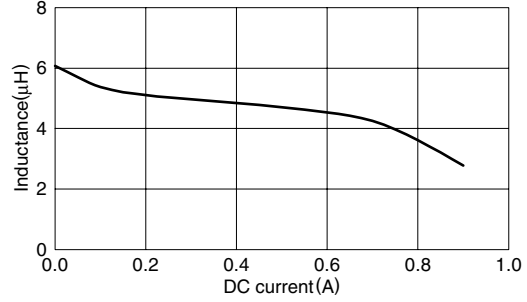


VLF3012AT-6R8MR59

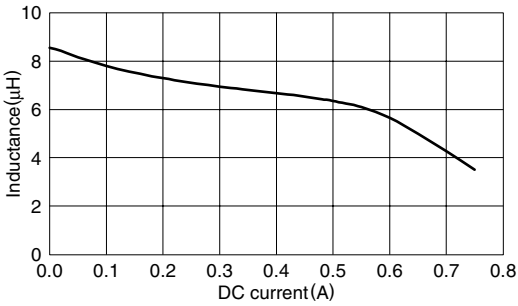


VLF3012AT-100MR49

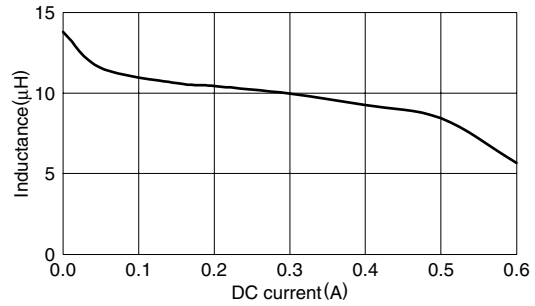


VLF3012AT-150MR41

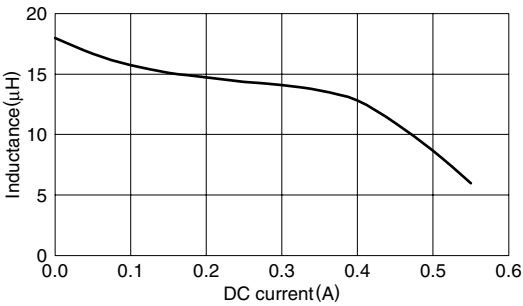


VLF3012AT-220MR33

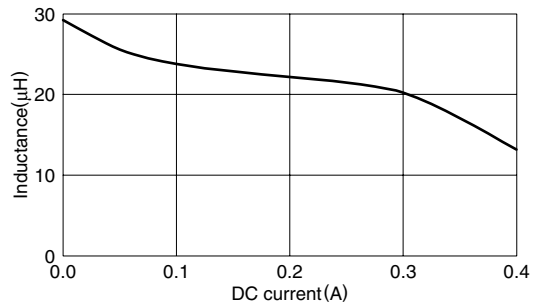


VLF3012AT-330MR27

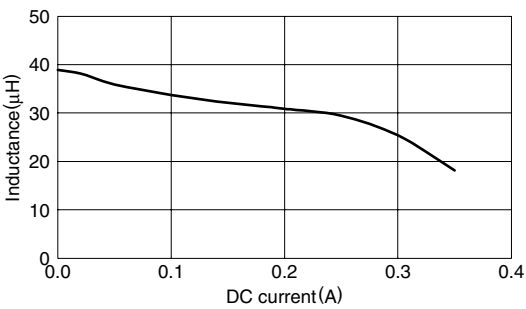

VLF3012AT-470MR22

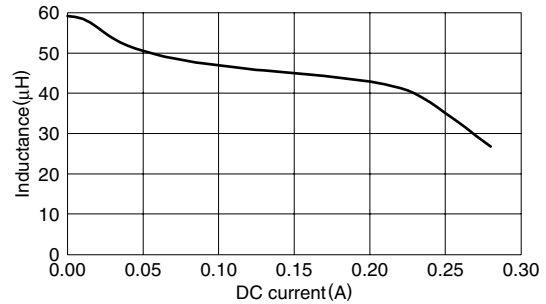

TEST CIRCUIT



- 1: LCR meter 4285A=100kHz
- 2: DC constant current