

Technical Data

Material:

Contact material: Brass

Insulator material: Black polyester UL94V-0

Standard: LCP

Electrical:

Current rating: 1.0Amps/contact max

Contact resistance: $\leq 20m\Omega$ /contact

Insulation resistance: $\geq 1000M\Omega$ at V=100V

Withstanding voltage: 300V AC/minute






Mechanical:

Operating temperature:

Gold plated: $-55^{\circ}C$ to $+105^{\circ}C$

Tin plated: $-40^{\circ}C$ to $+105^{\circ}C$

Soldering temperature: $+280^{\circ}C$, 10s max

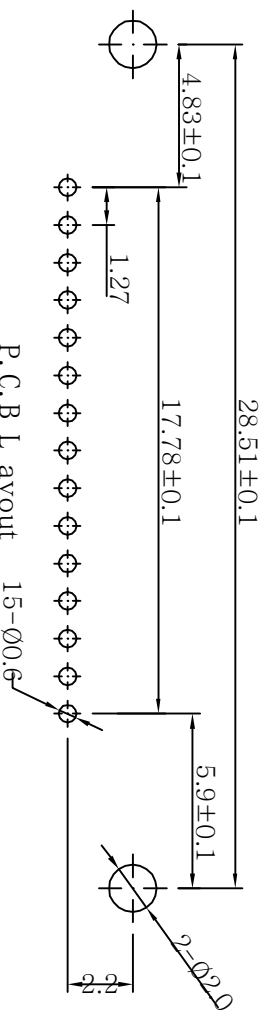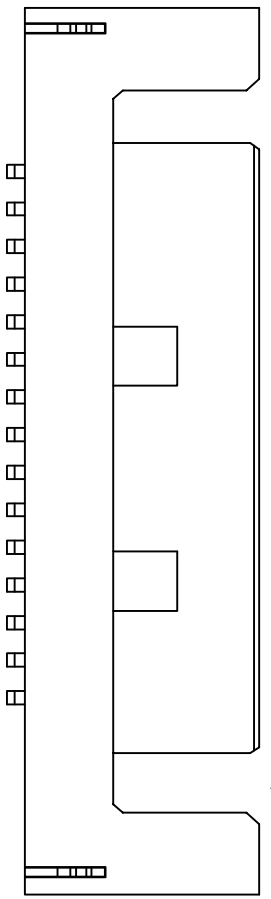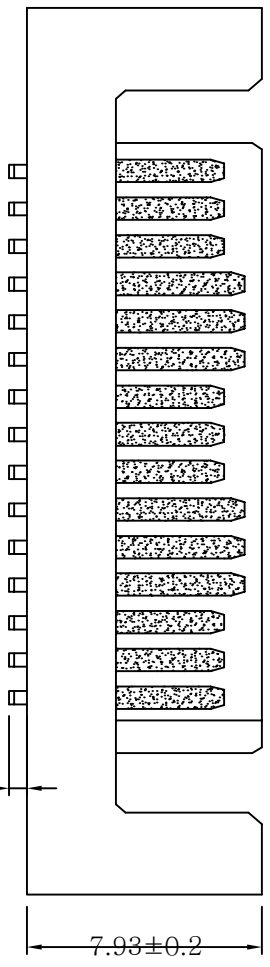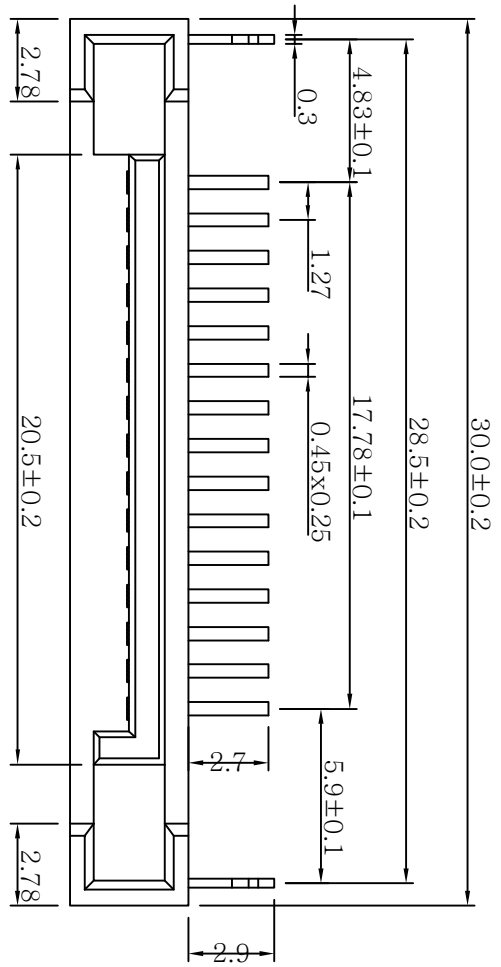

HDX 深圳市海达兴科技有限公司		SATA1.27-15PW	
未注尺寸公差为±0.05	绘制	郝世彦	图号
未注角度公差为±2°	审核		客户
	核准		客户料号
	供应商		单位
	比例		页次
			mm