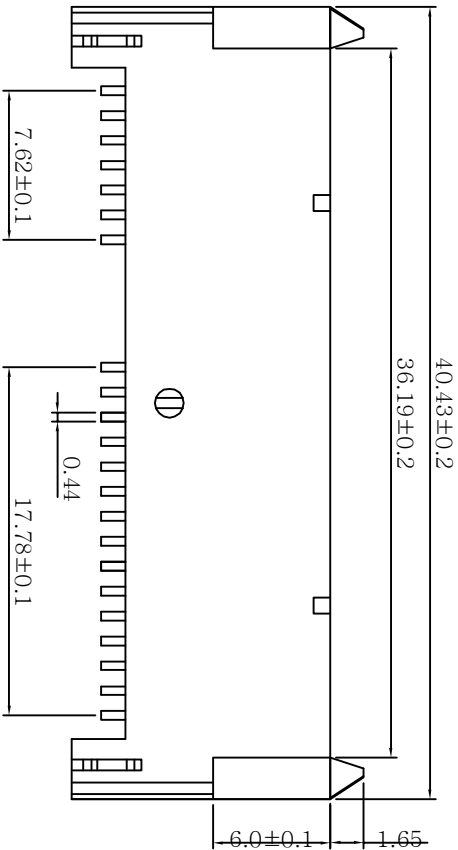
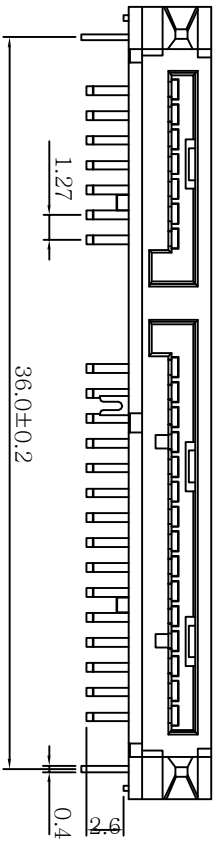


Technical Data

Material:

Contact material:Brass

Insulator material:Black polyester UL94V-0

Standard:LCP

Electrical:

Current rating: 1.0Amps/contact max

Contact resistance:≤20mΩ/contact

Insulation resistance:≥1000MΩ at V=100V

Withstanding voltage:300V AC/minute

Mechanical:

Operating temperature:

Gold plated:-55℃ to +105℃

Tin plated:-40℃ to +105℃

Soldering temperature:+280℃, 10s max

HDX 深圳市海达兴科技有限公司			SATA(7+15)P 90° H4.0 板上母座		
绘制	郝世彦		图号		
审核			客户		
核准			客户料号		
供应商			单位		mm
比例			页次		