

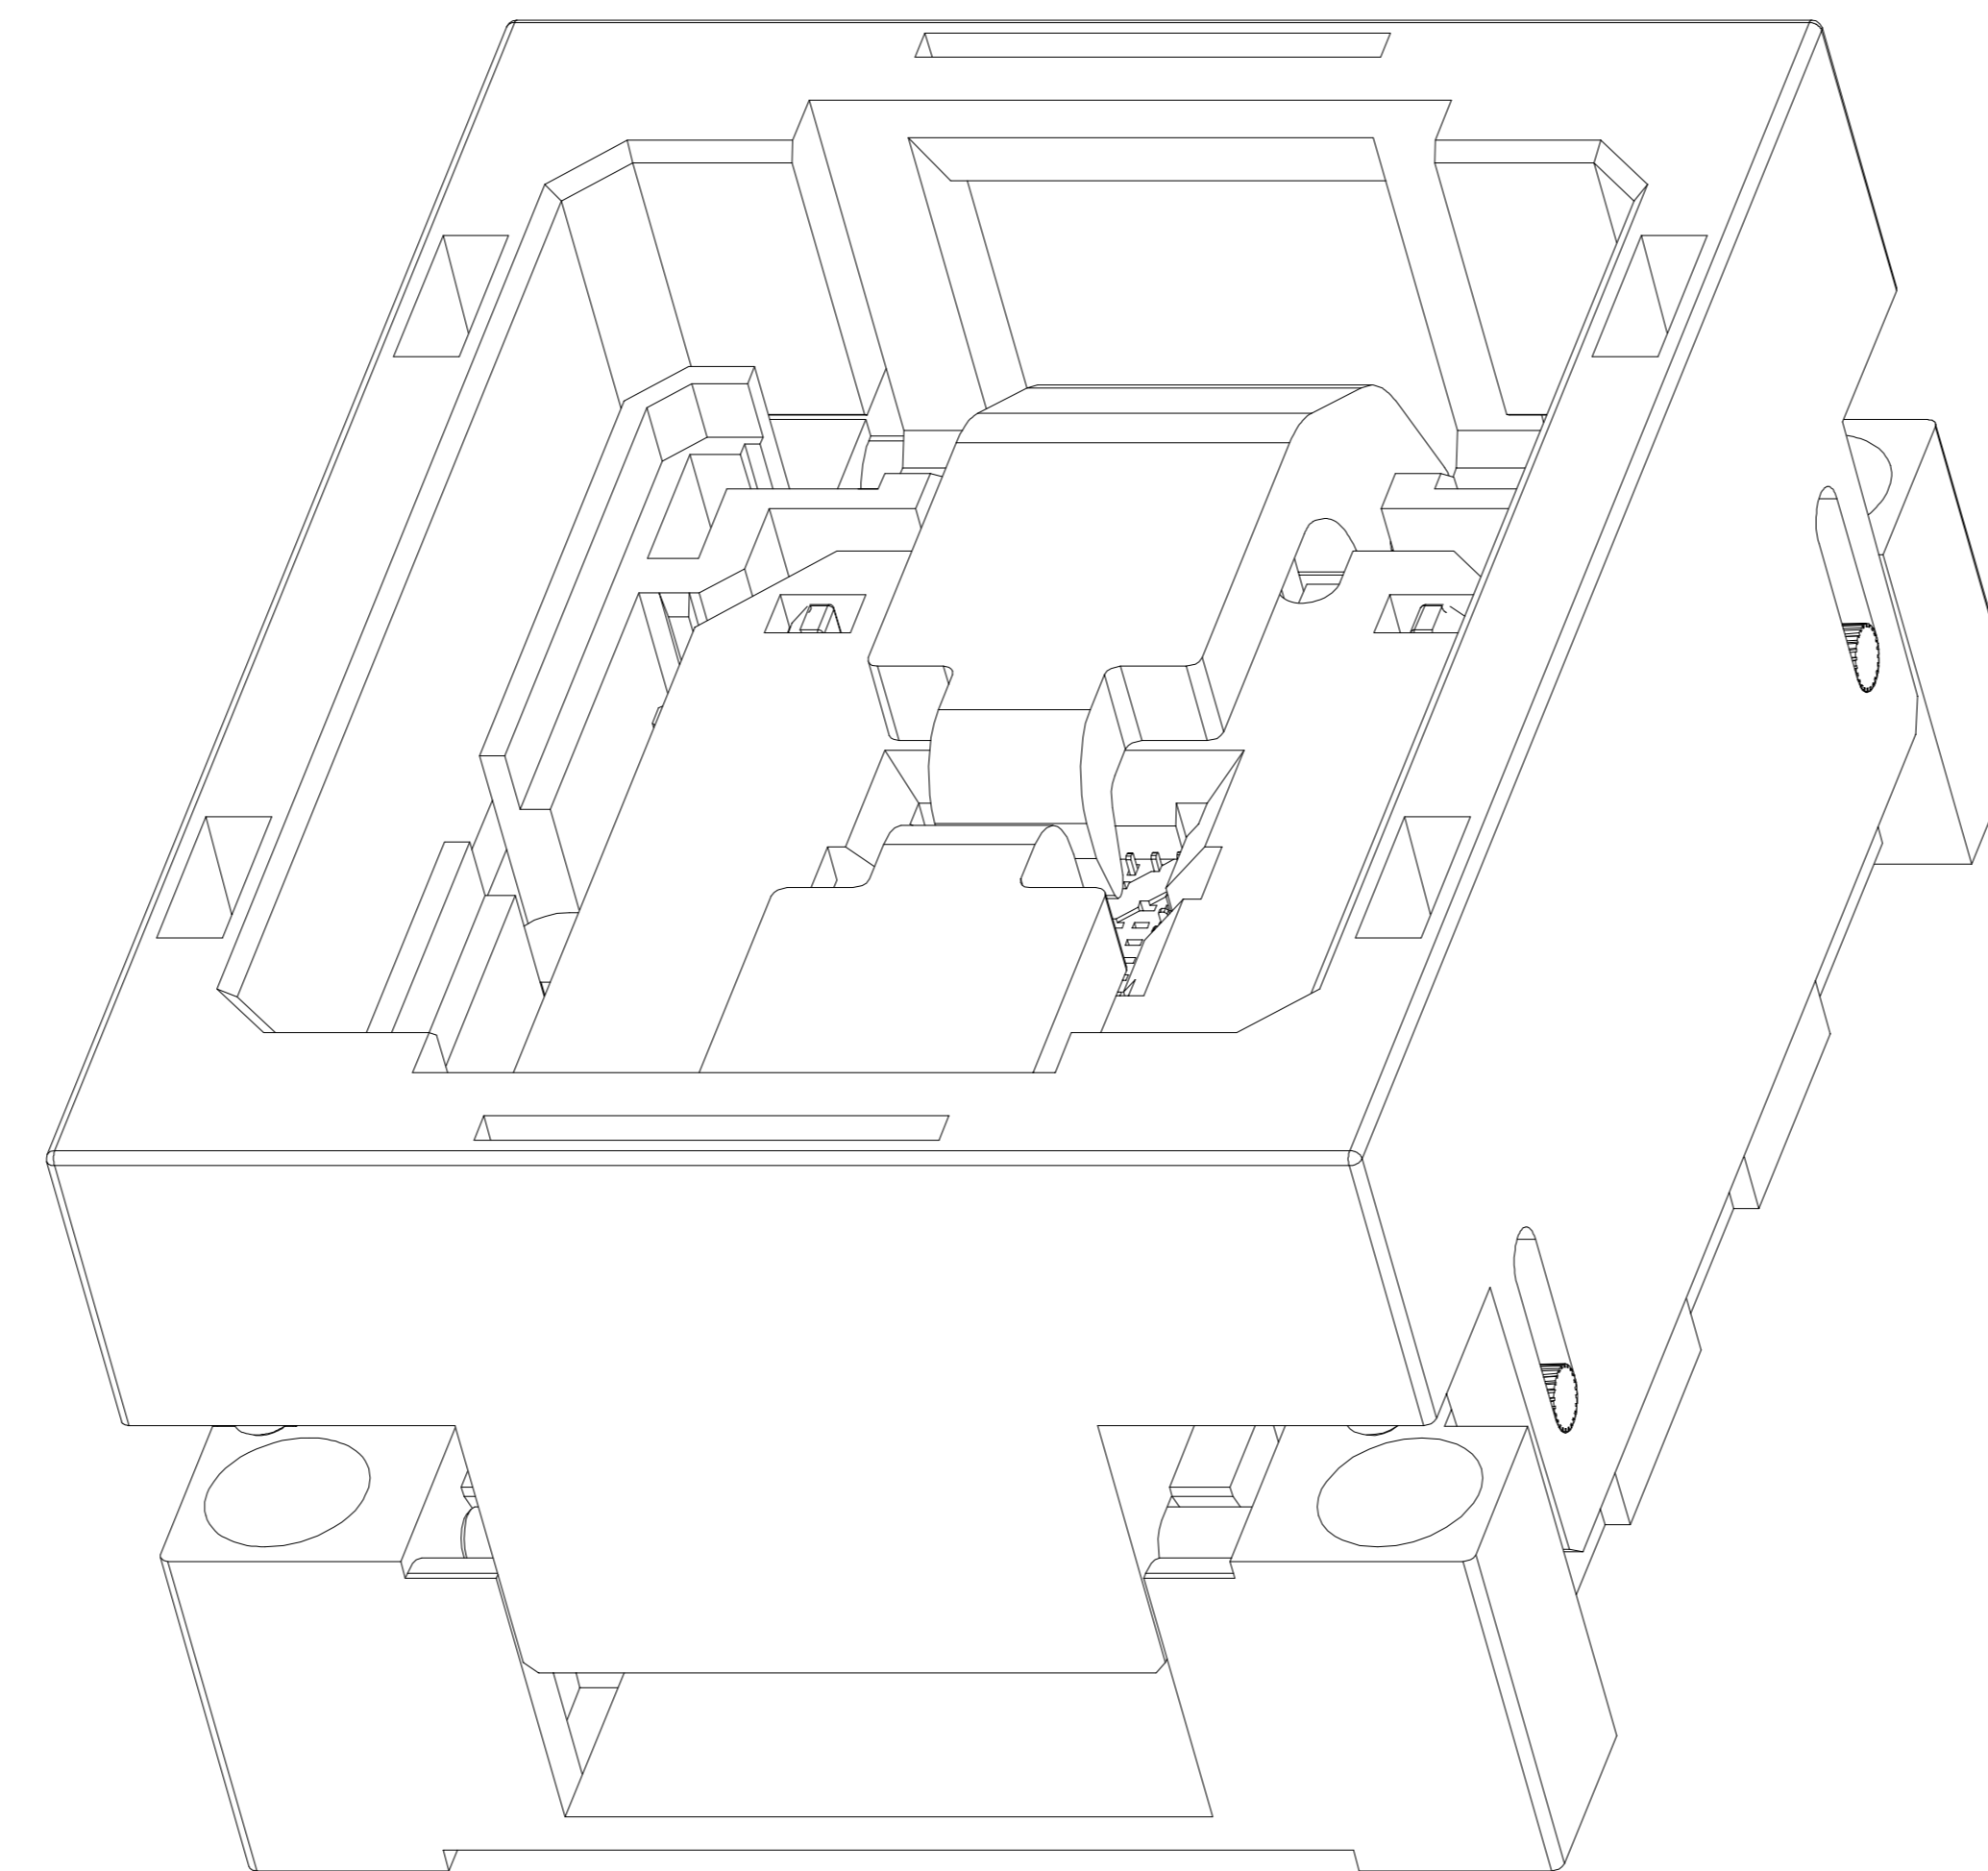
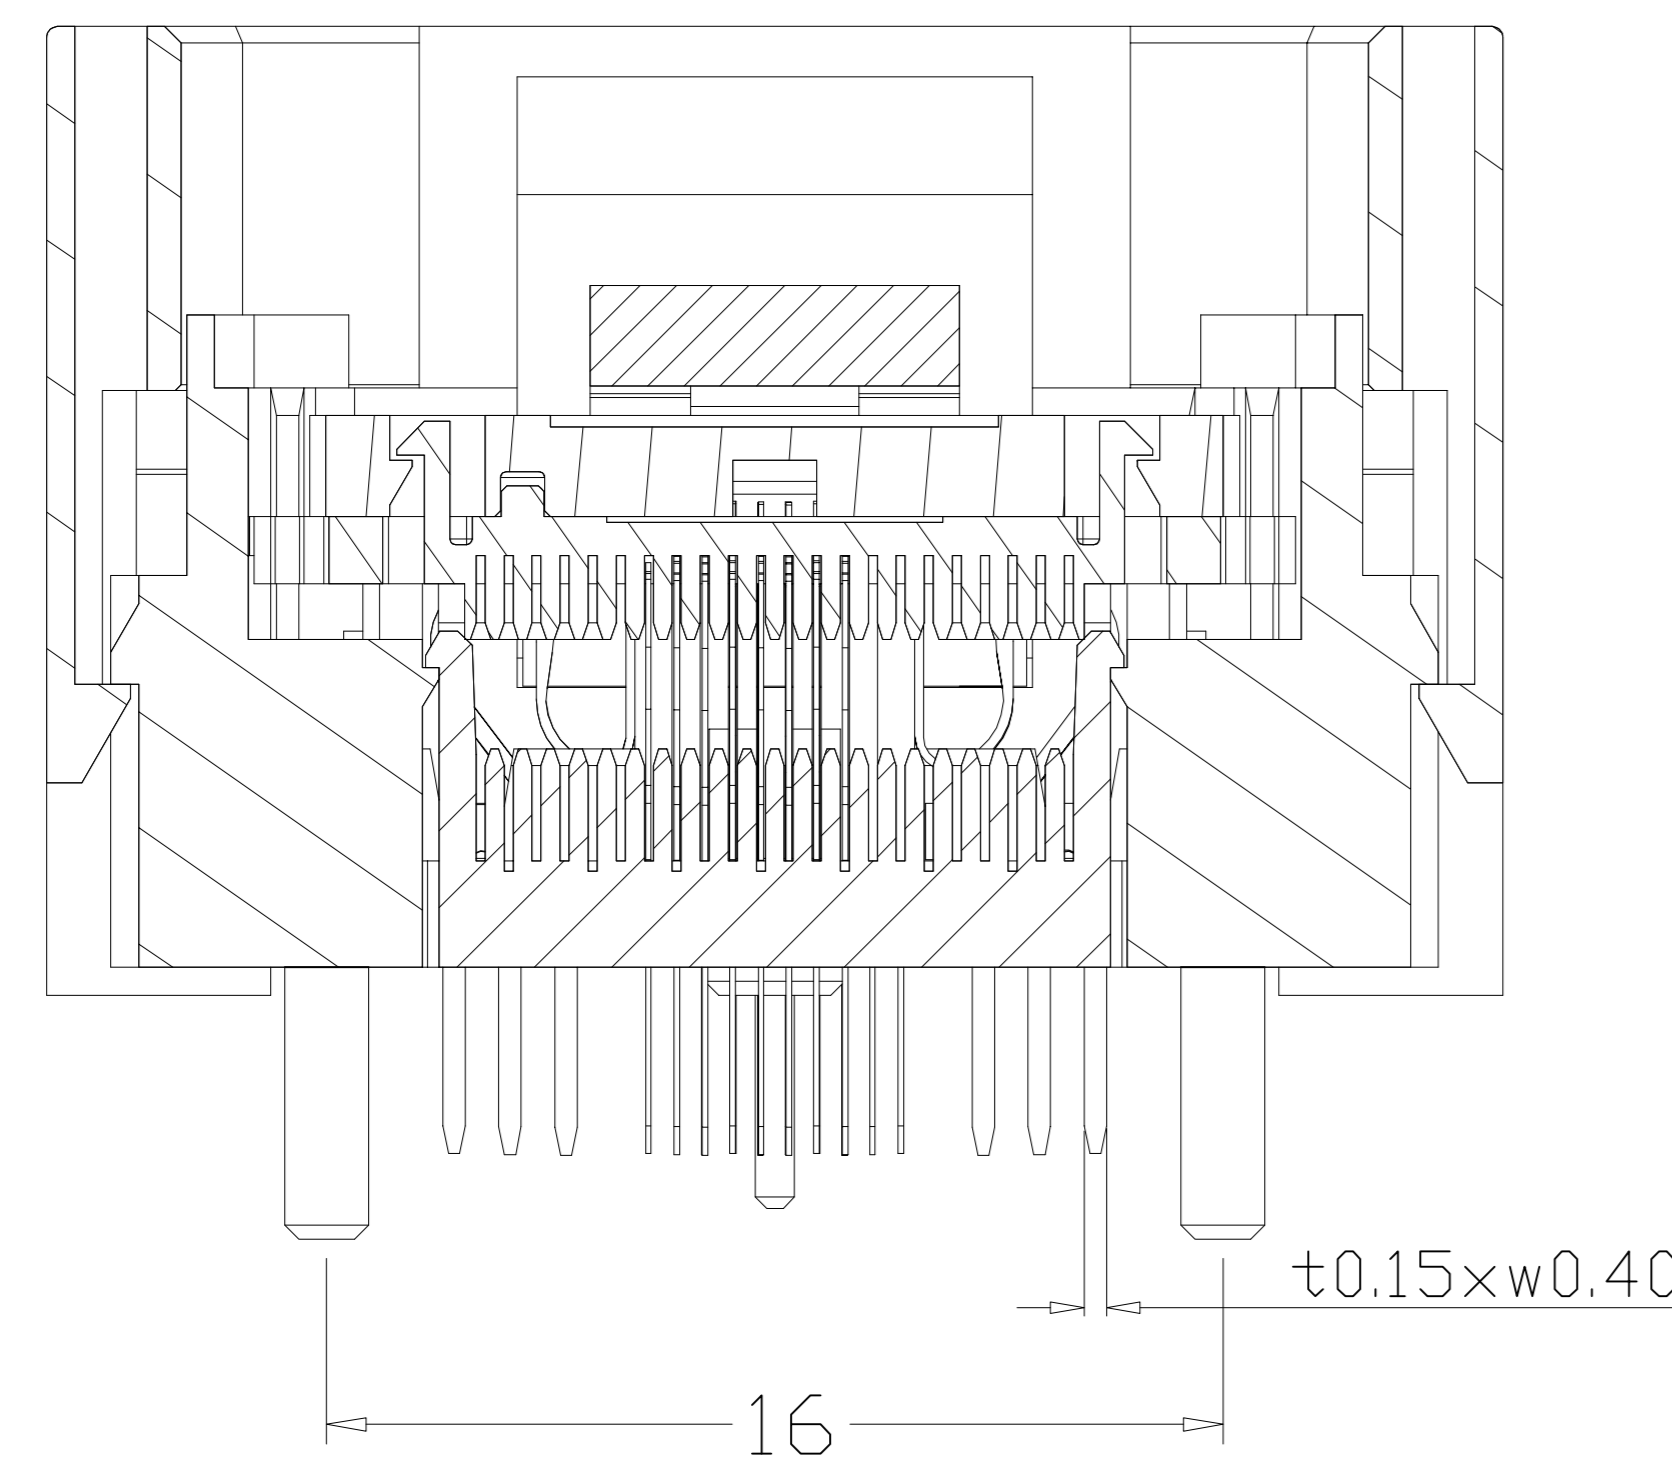
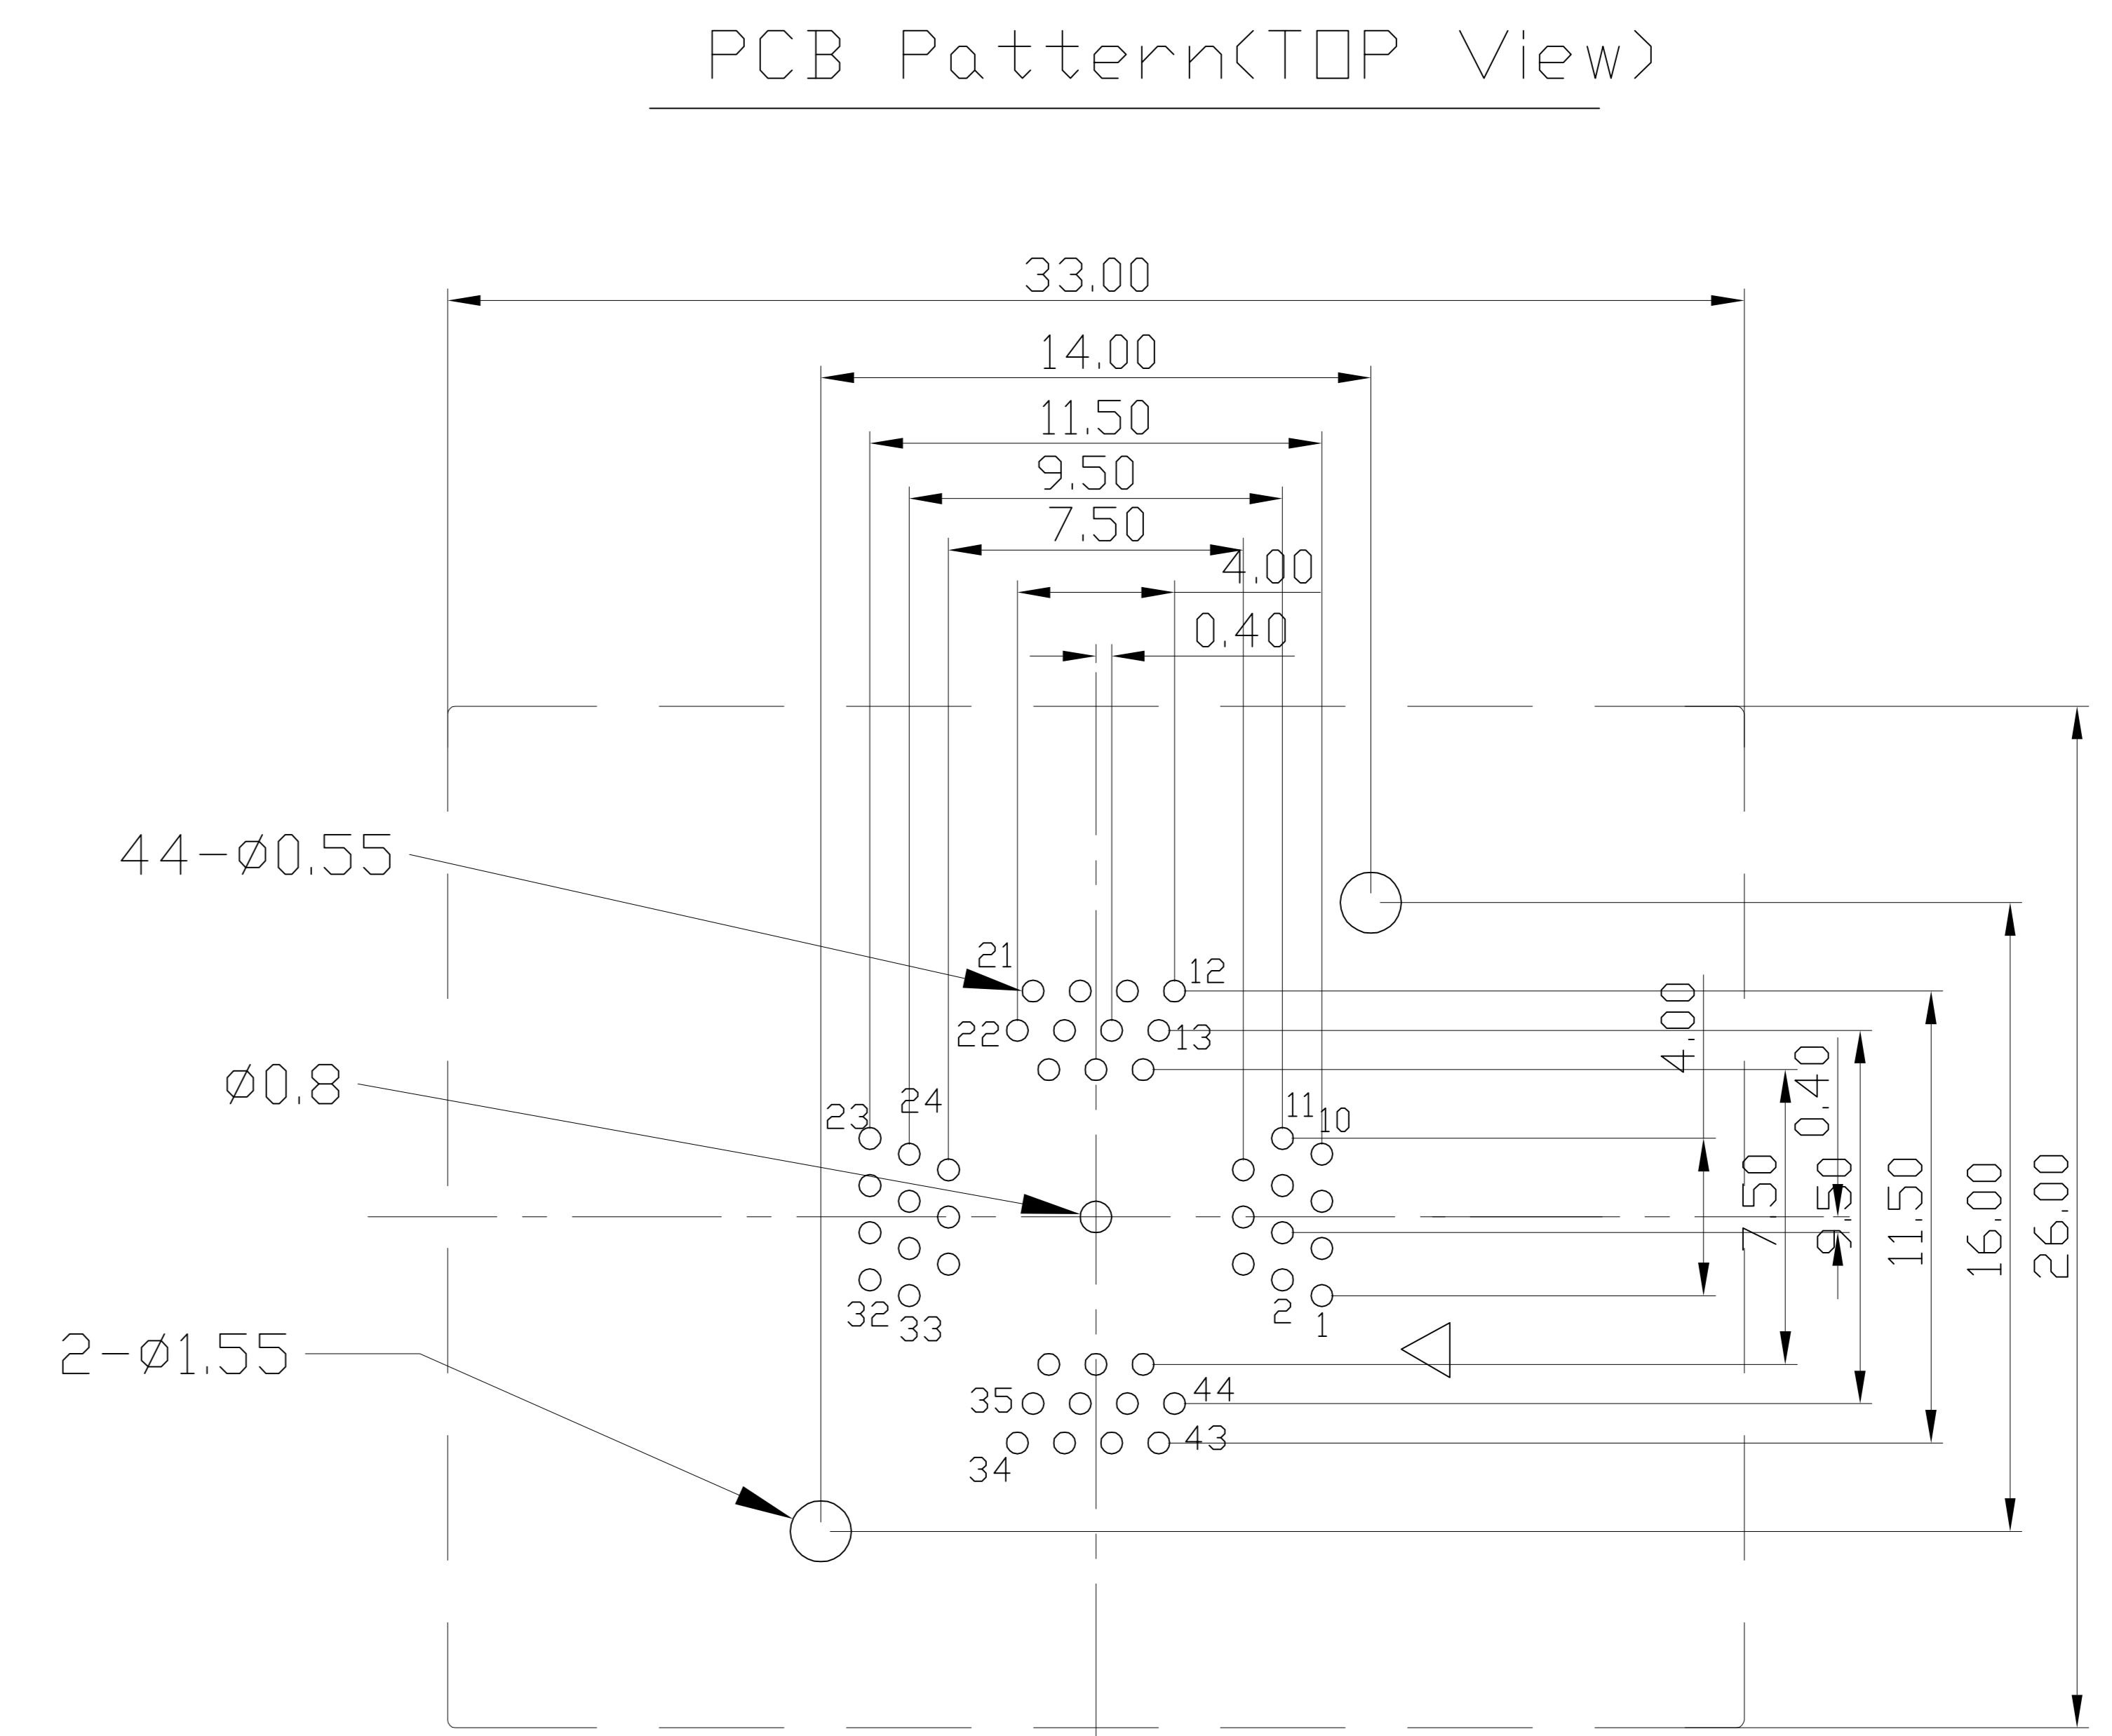
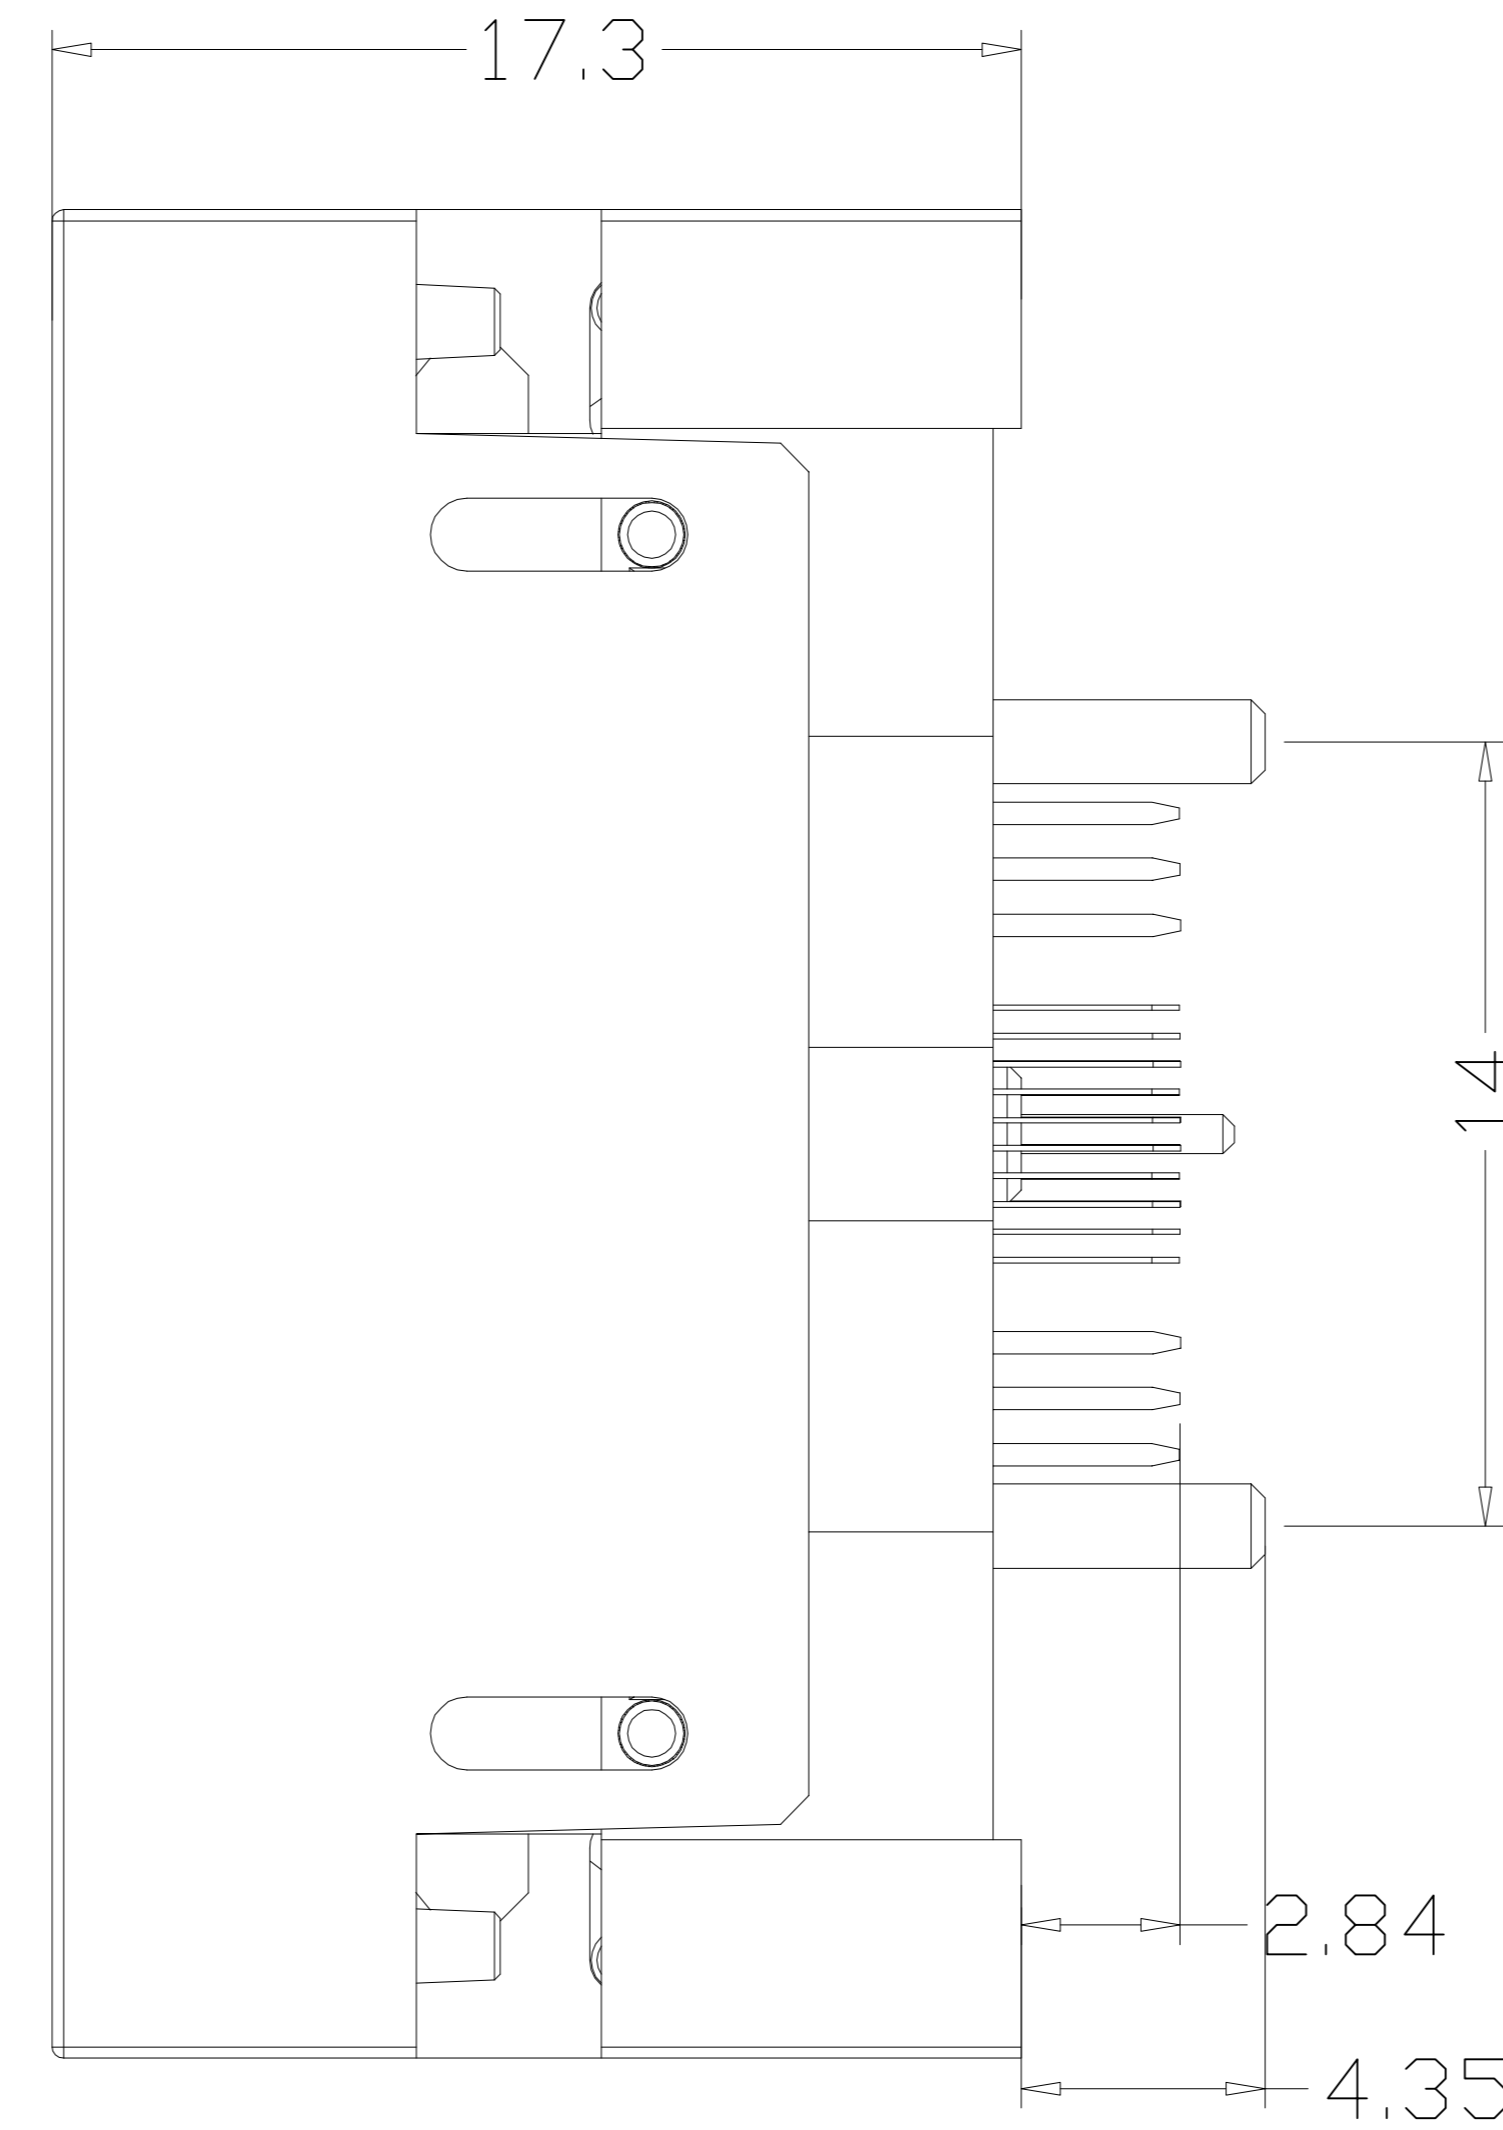



REVISION	DESCRIPTION	CHECK	APP	DATE	REV. NOTICE NO
△ 1					
△ 2					
△ 3					

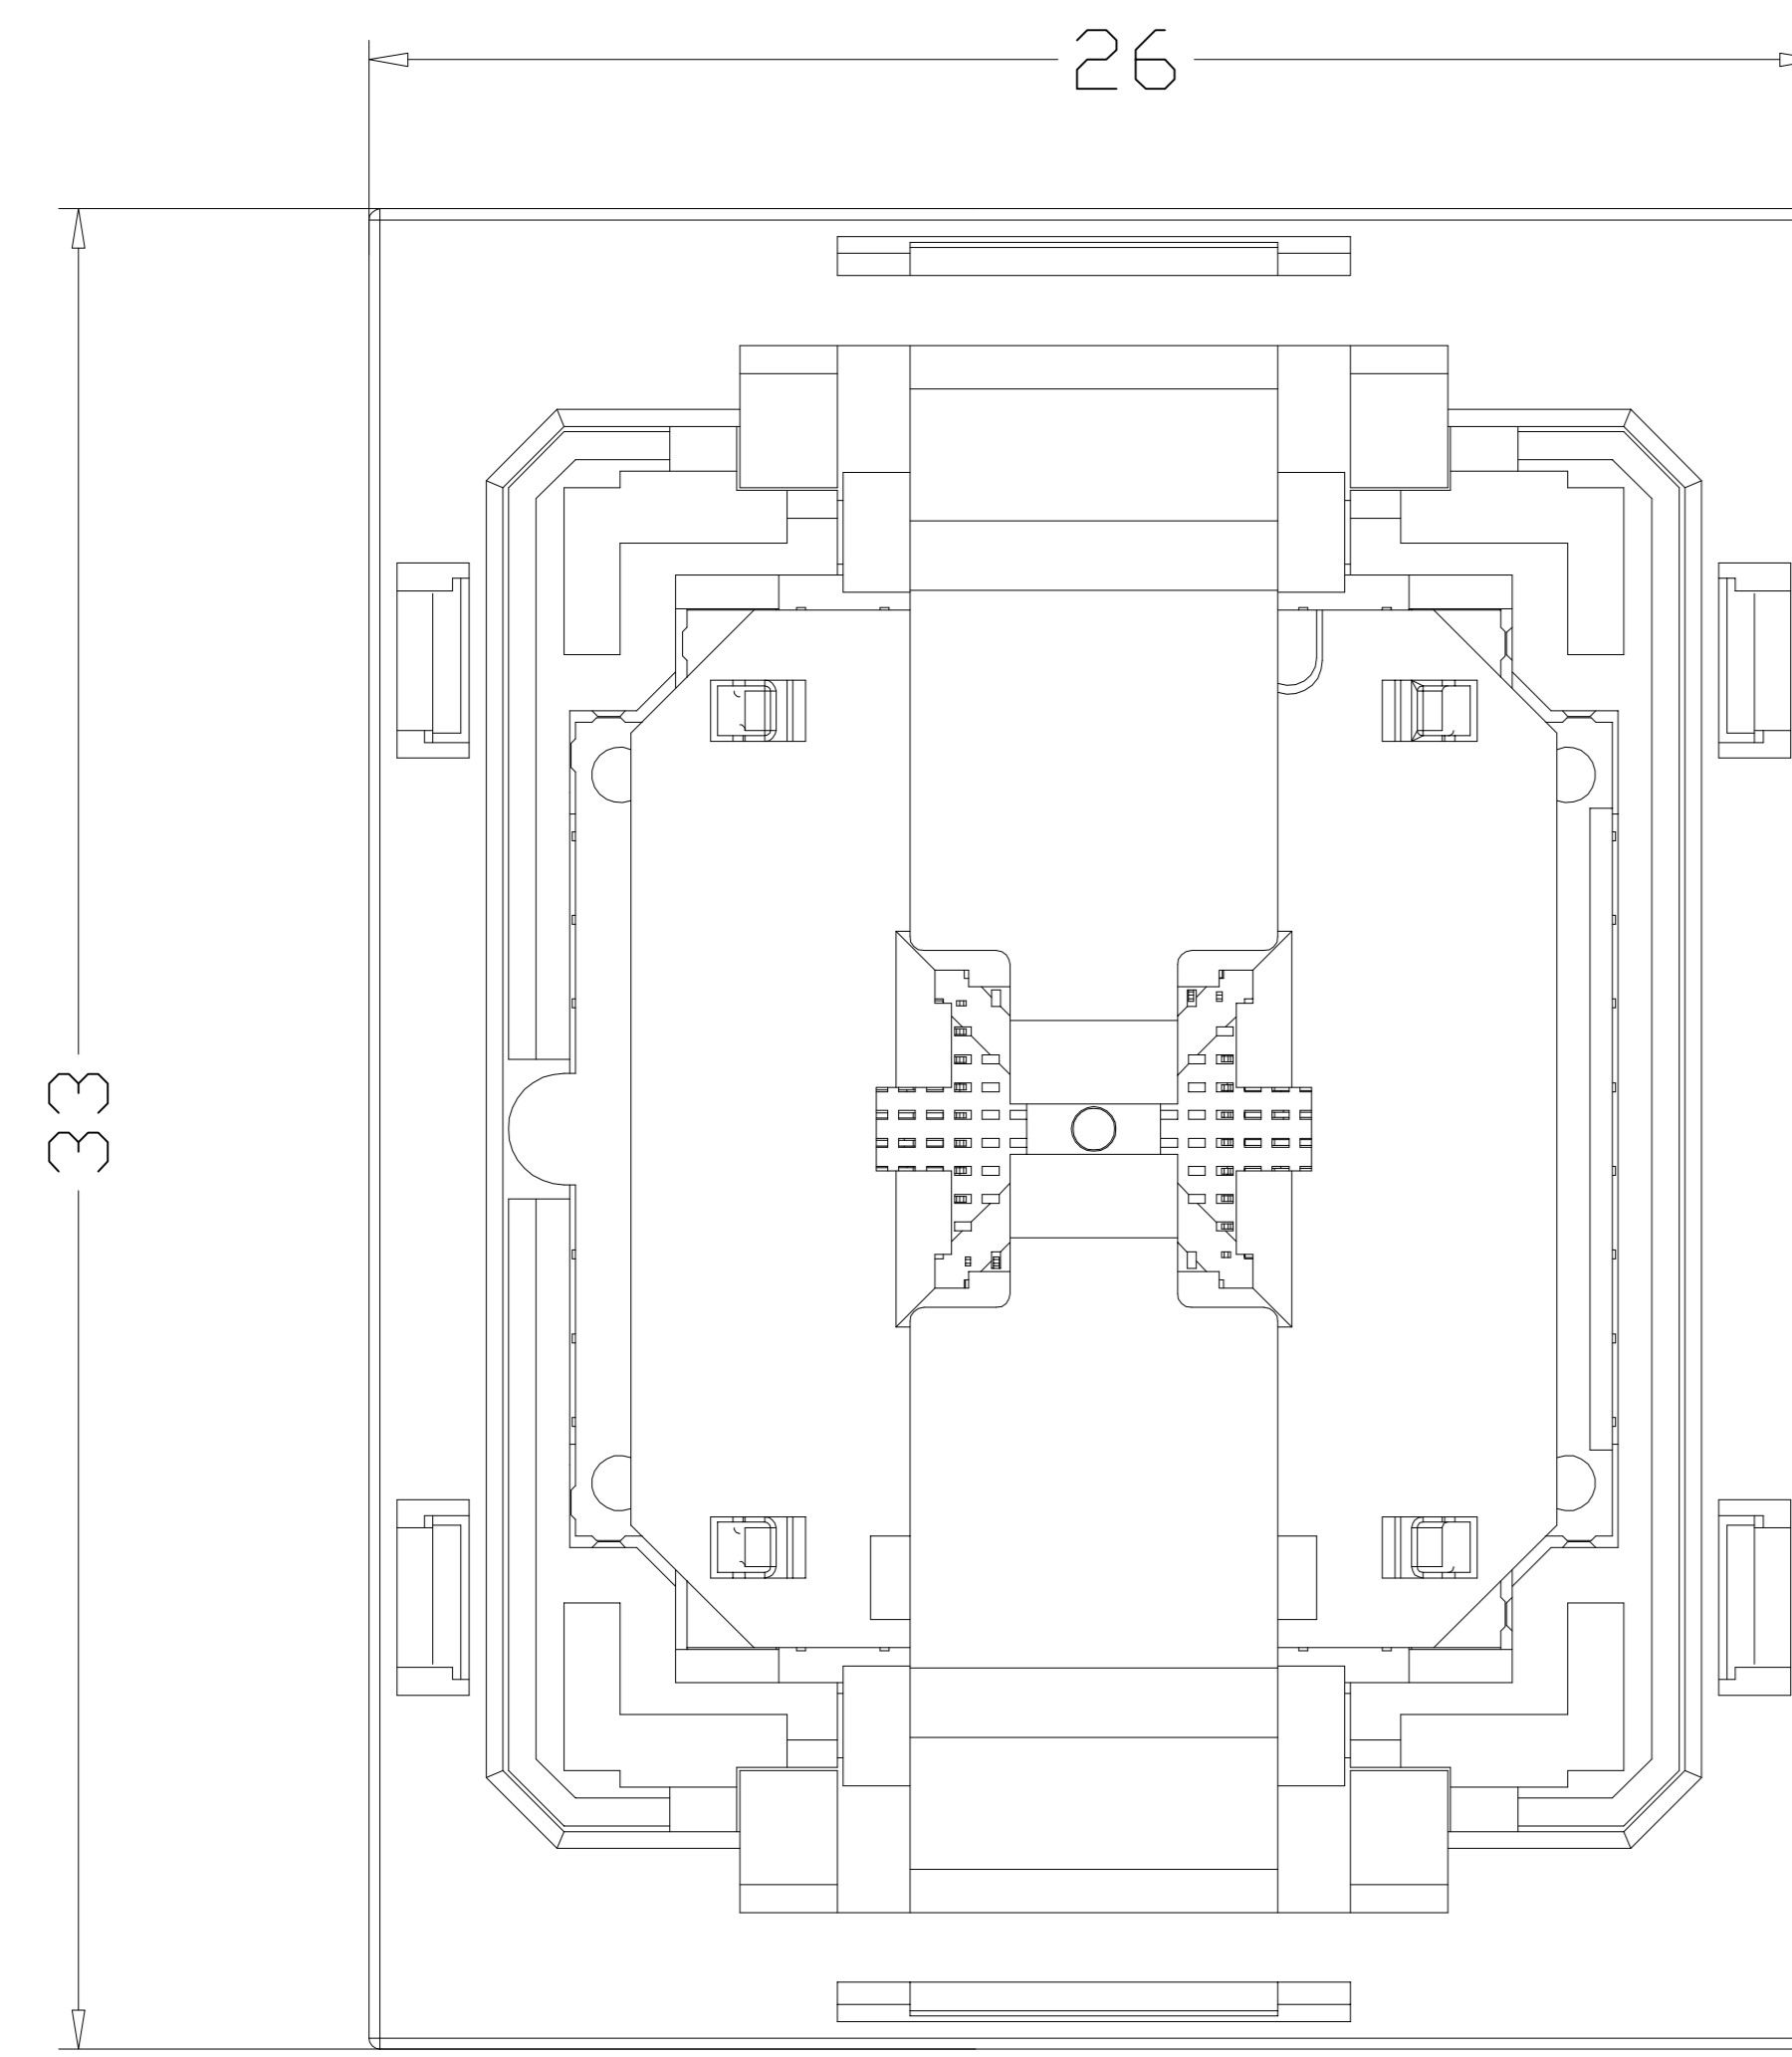


Applicable IC

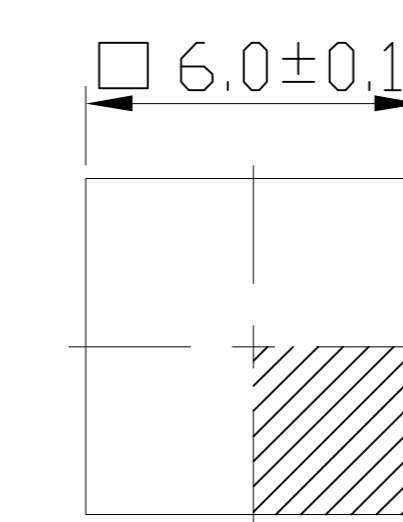

TOP VIEW

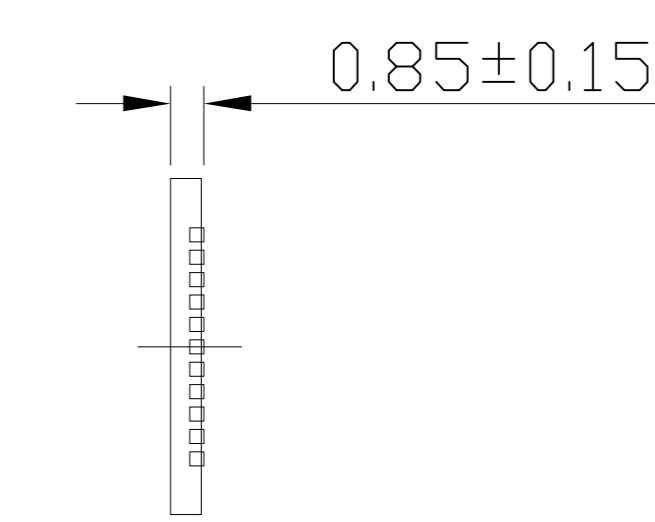

SIDE VIEW

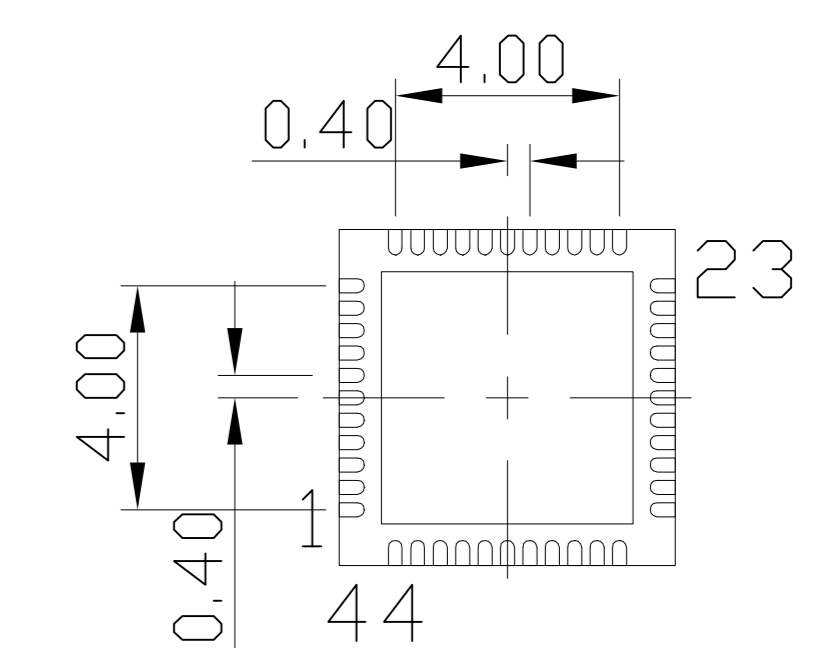

BOTTOM VIEW

PERFORMANCE

- 1、Insulation Resistance: 1000M $\Omega$  Min.At DC 500V
- 2、Dielectric Withstanding Voltage For 1 Minute At AC 700V
- 3、Contact Resistance 30m $\Omega$  MAX. at 10mA and 20mV MAX.(Initial)
- 4、Current Rating: 1A max.
- 5、Operation Temperature -55°C ~+175°C
- 6、Life Span 15,000 Times (Mechanical)
- 7、Operation Force 2.0 Kg MAX

TOLERANCE	PROJECTION	GENERAL TOLERANCES	±0.10	TITLE	QFN44-0.4 SOCKET
X. ± 0.50	DIMENSION: mm	R E V	A	CLASS	QFN44-0.4-TP01GT
X. X ± 0.25	APP:	SCALE: 1:1	DATE:	DRW. NO	7L-PWQFN-0.4-6X6-B-01
X. XX ± 0.10	CHECK:	DATE:			
X. XXX ± 0.05	DEGK: ENG03	DATE: 20150606			