

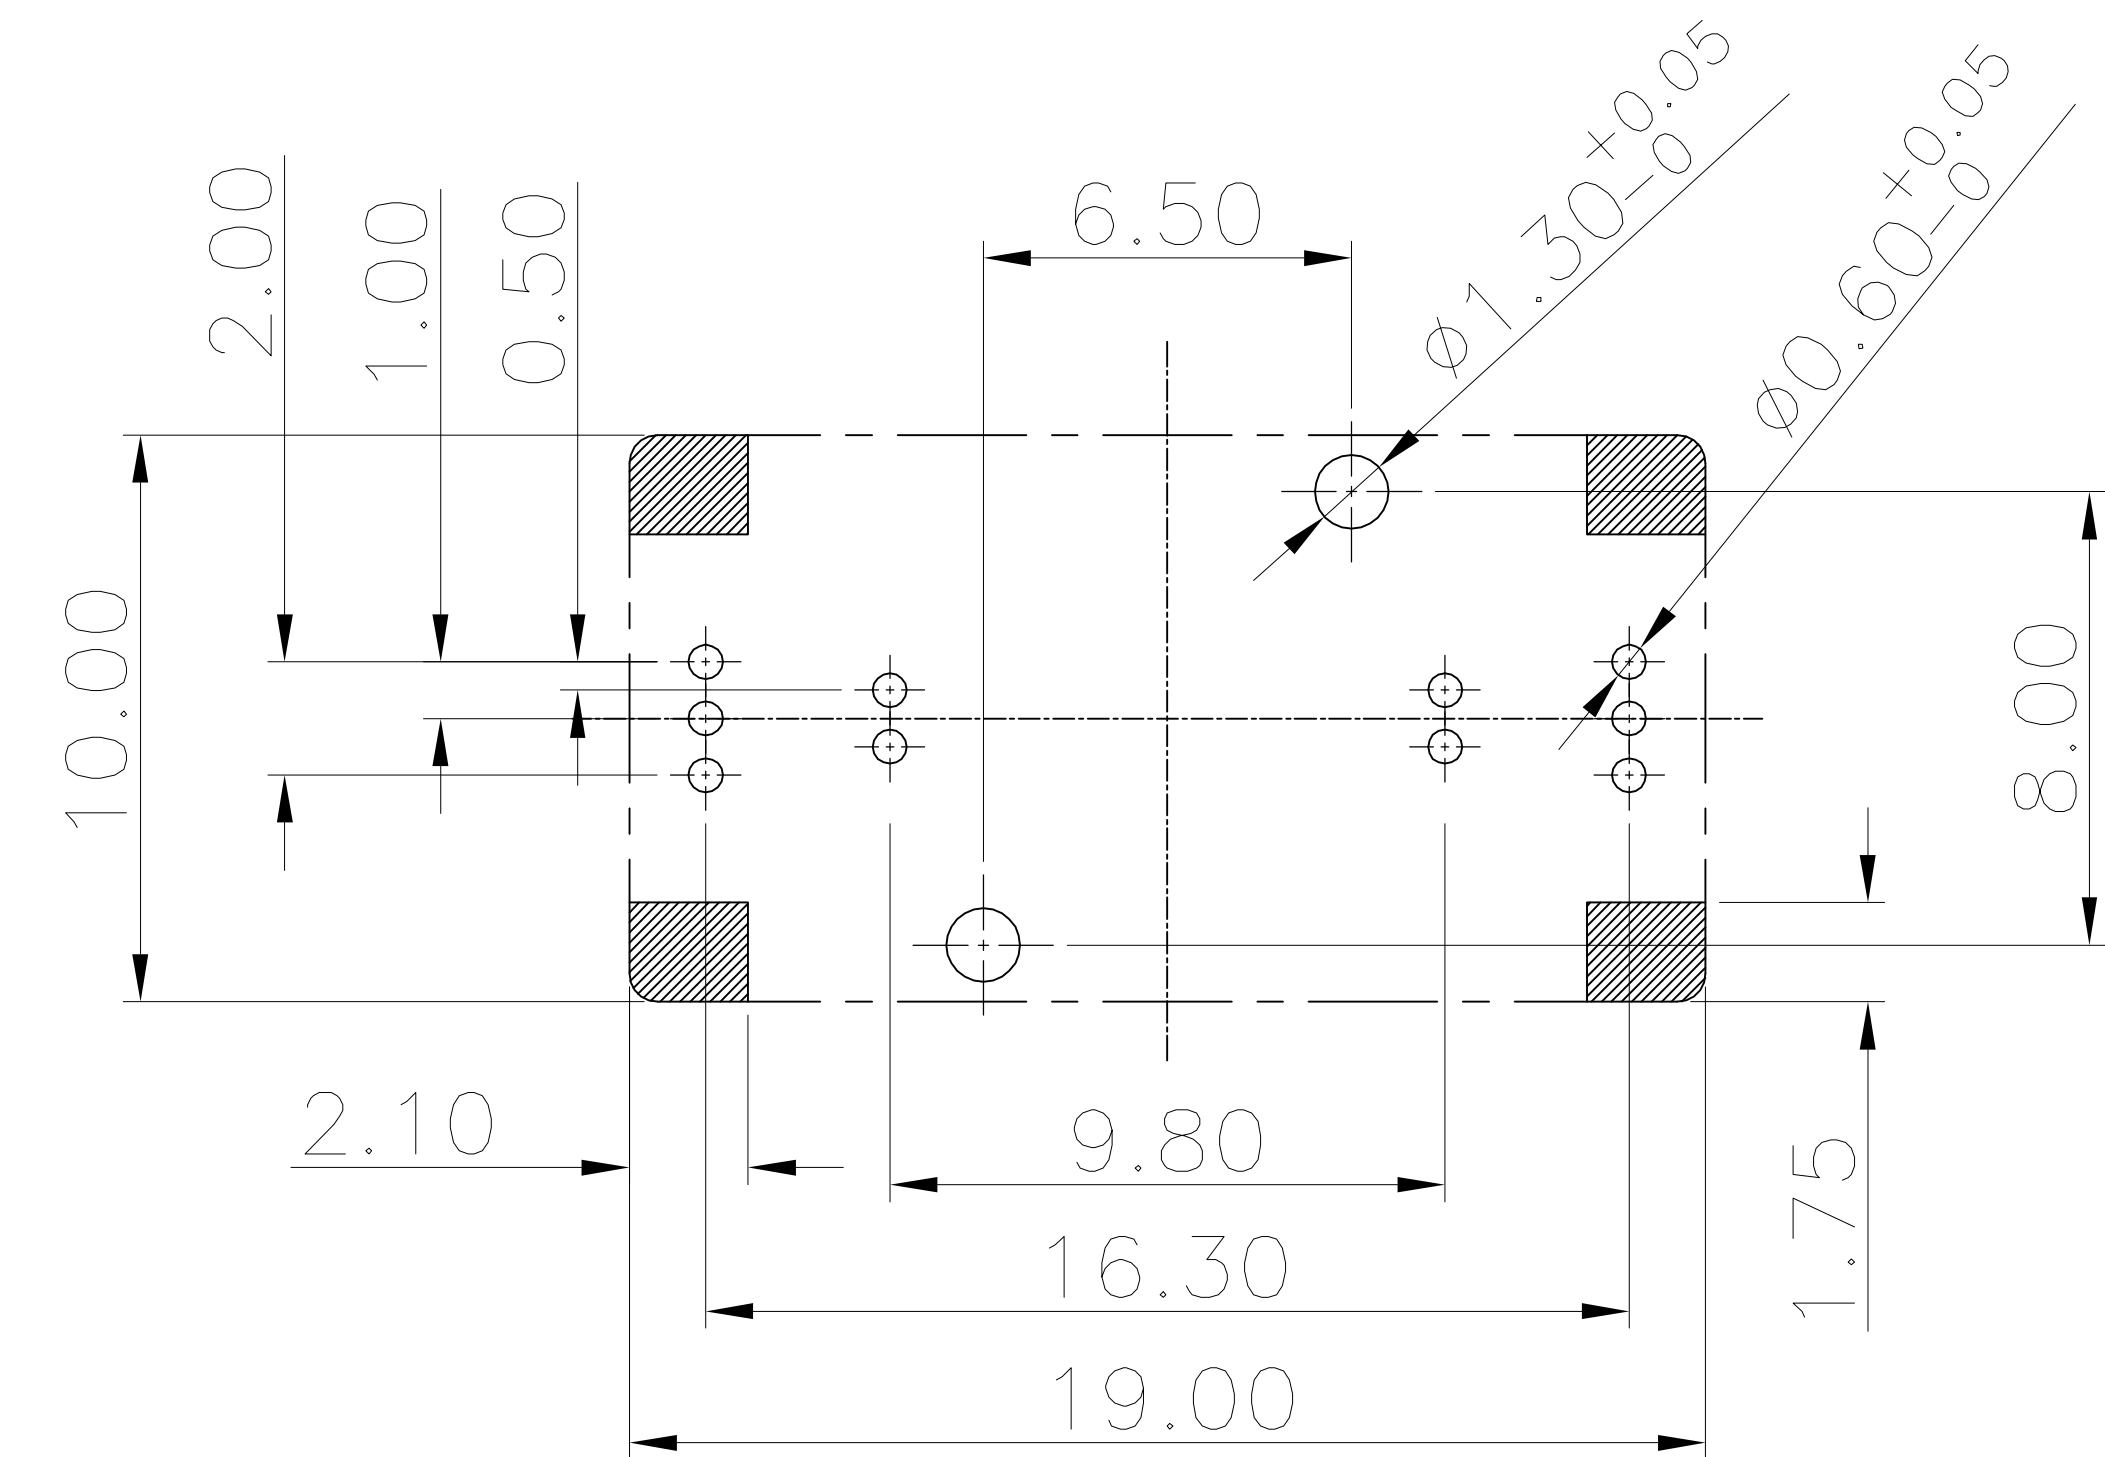
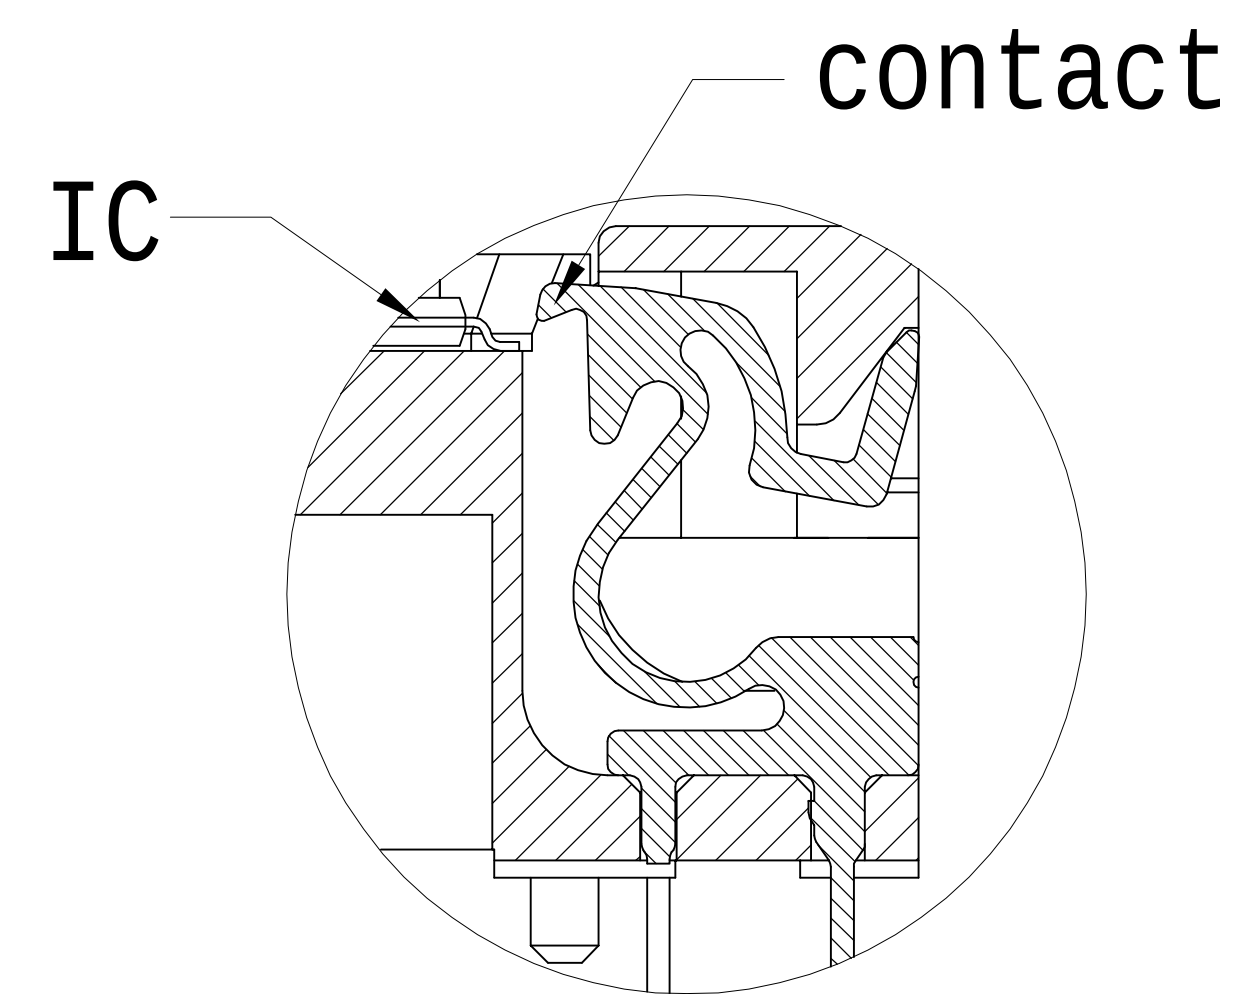
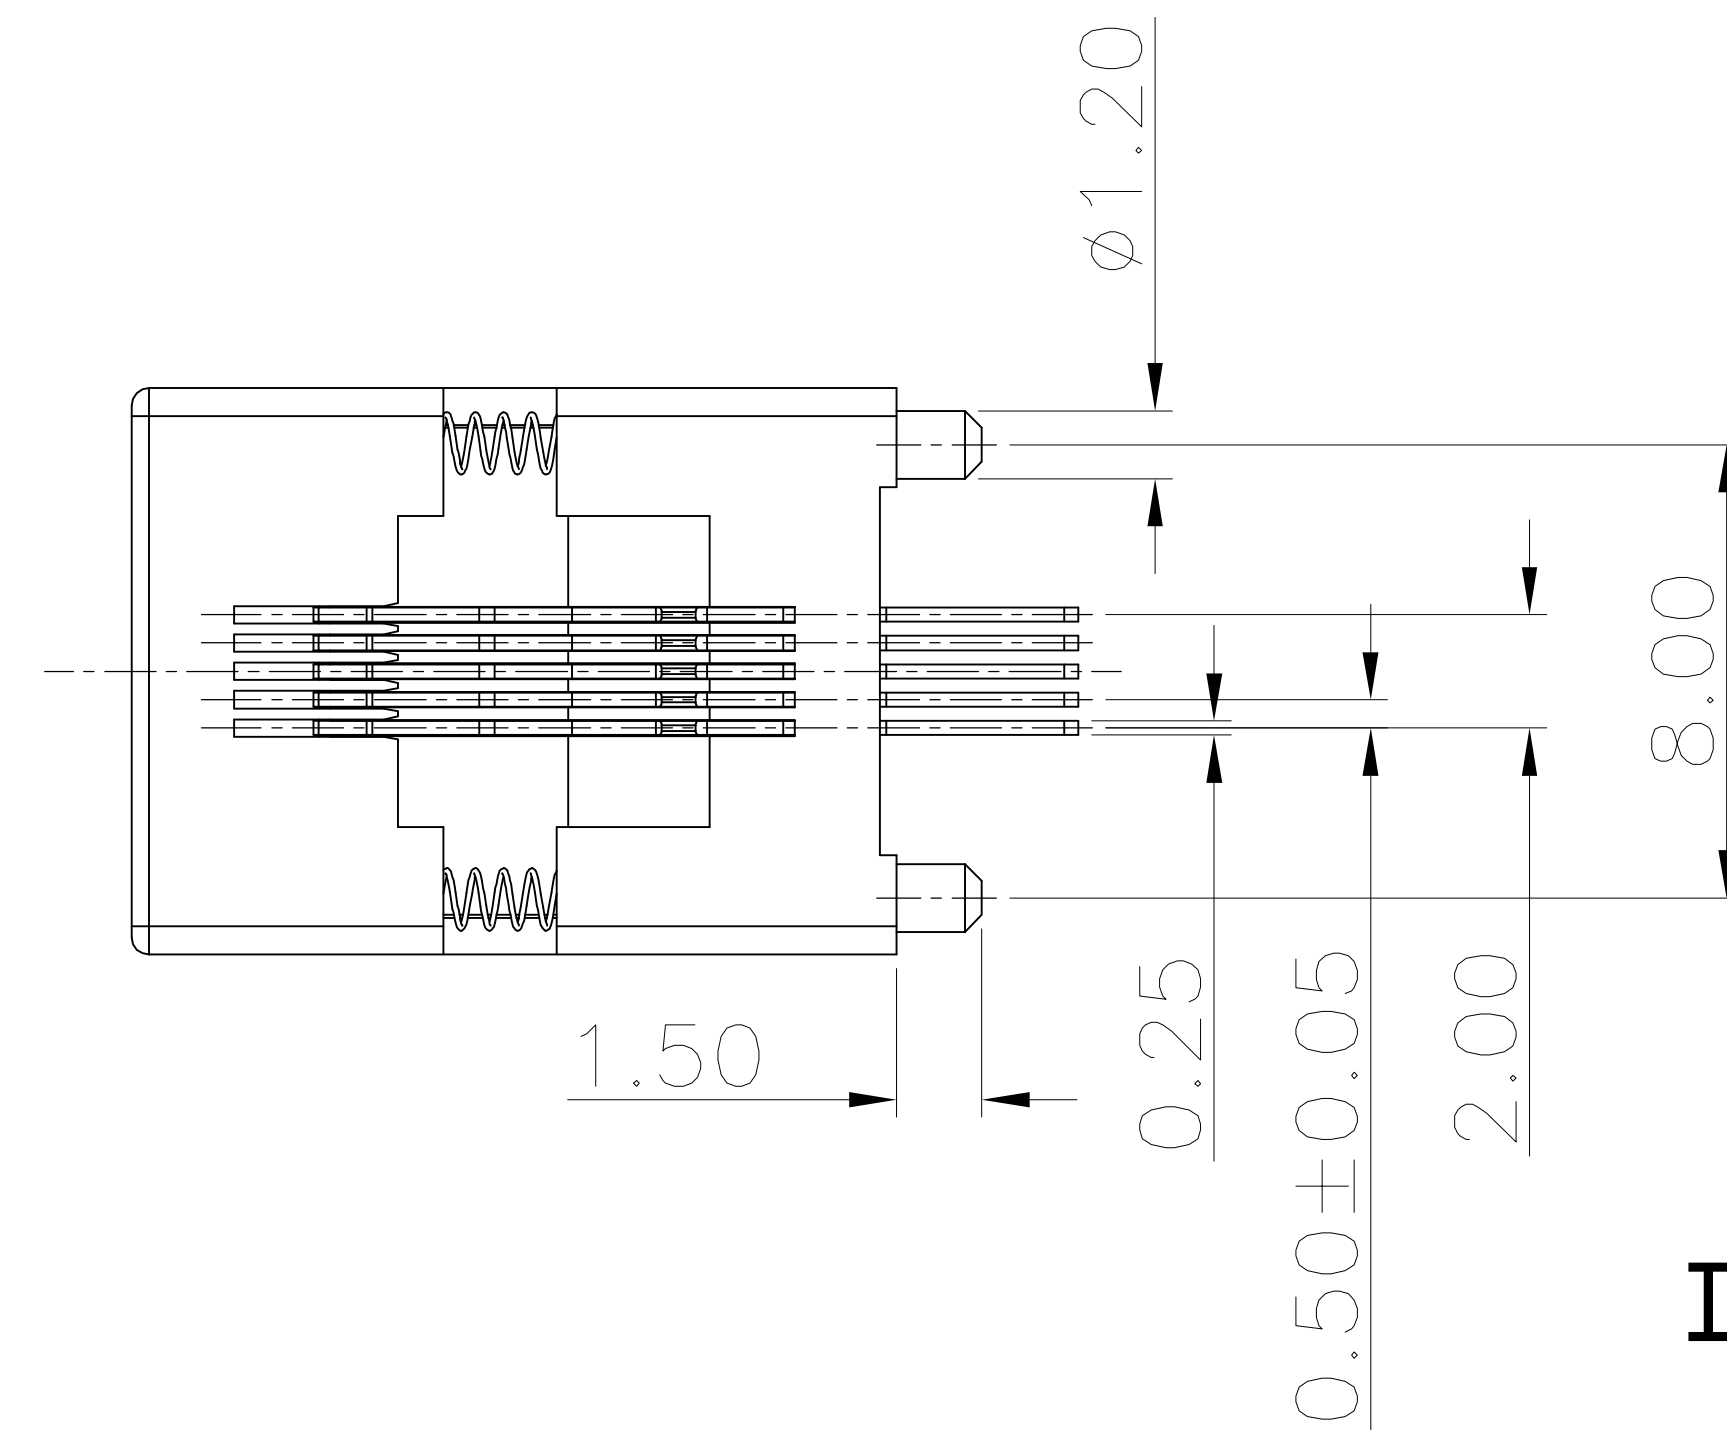
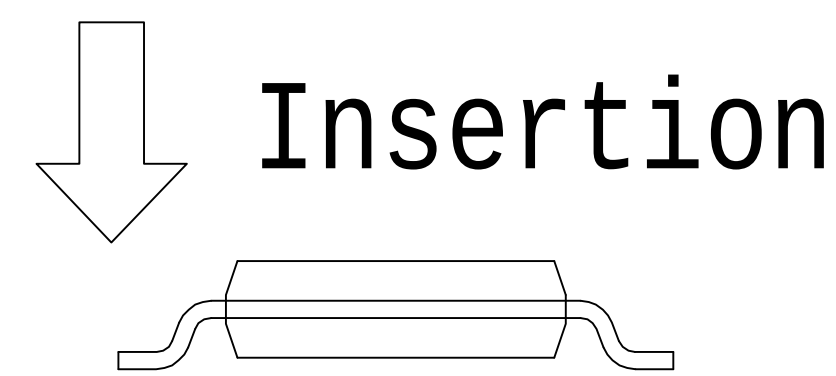


	REVISION DESCRIPTION	CHECK	APP	DATE	REV.NOTICE.NO
△ 1					
△ 2					
△ 3					

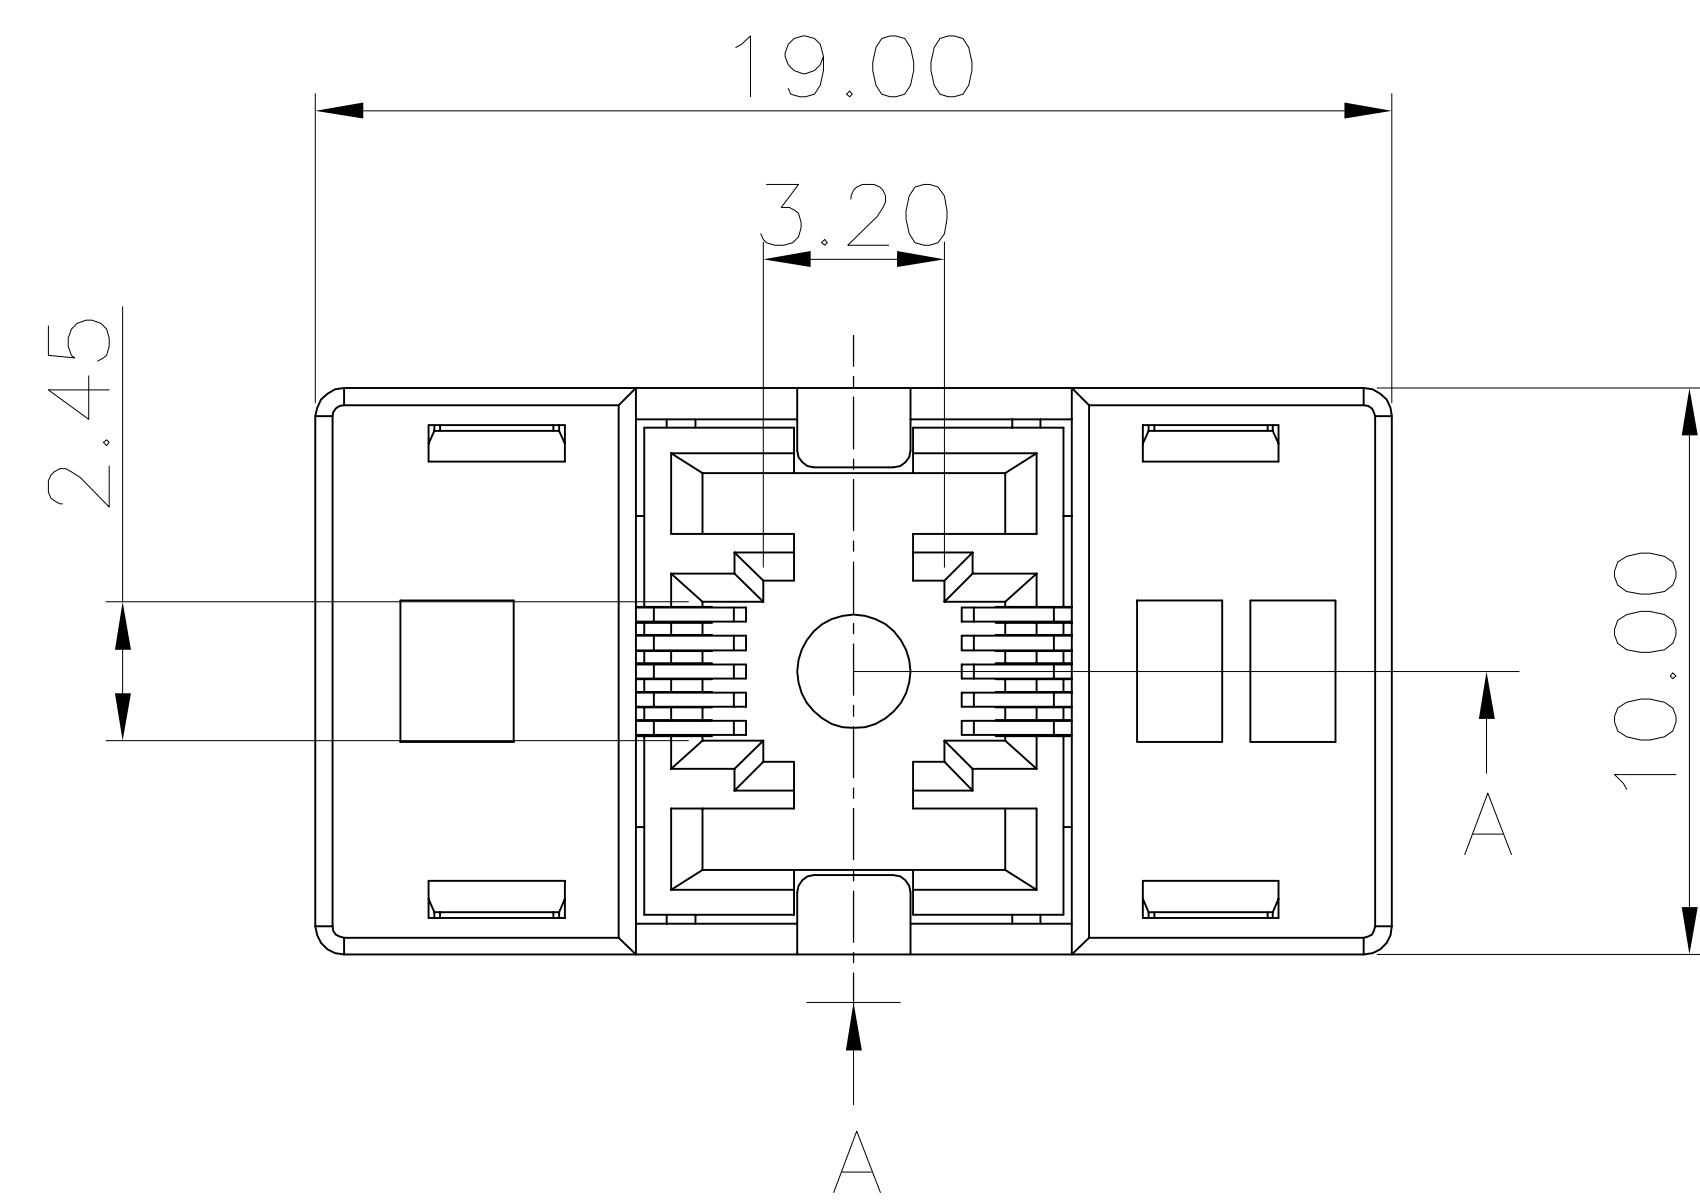


PCB PATTERN (TOP VIEW)

TOLERANCE: ± 0.05

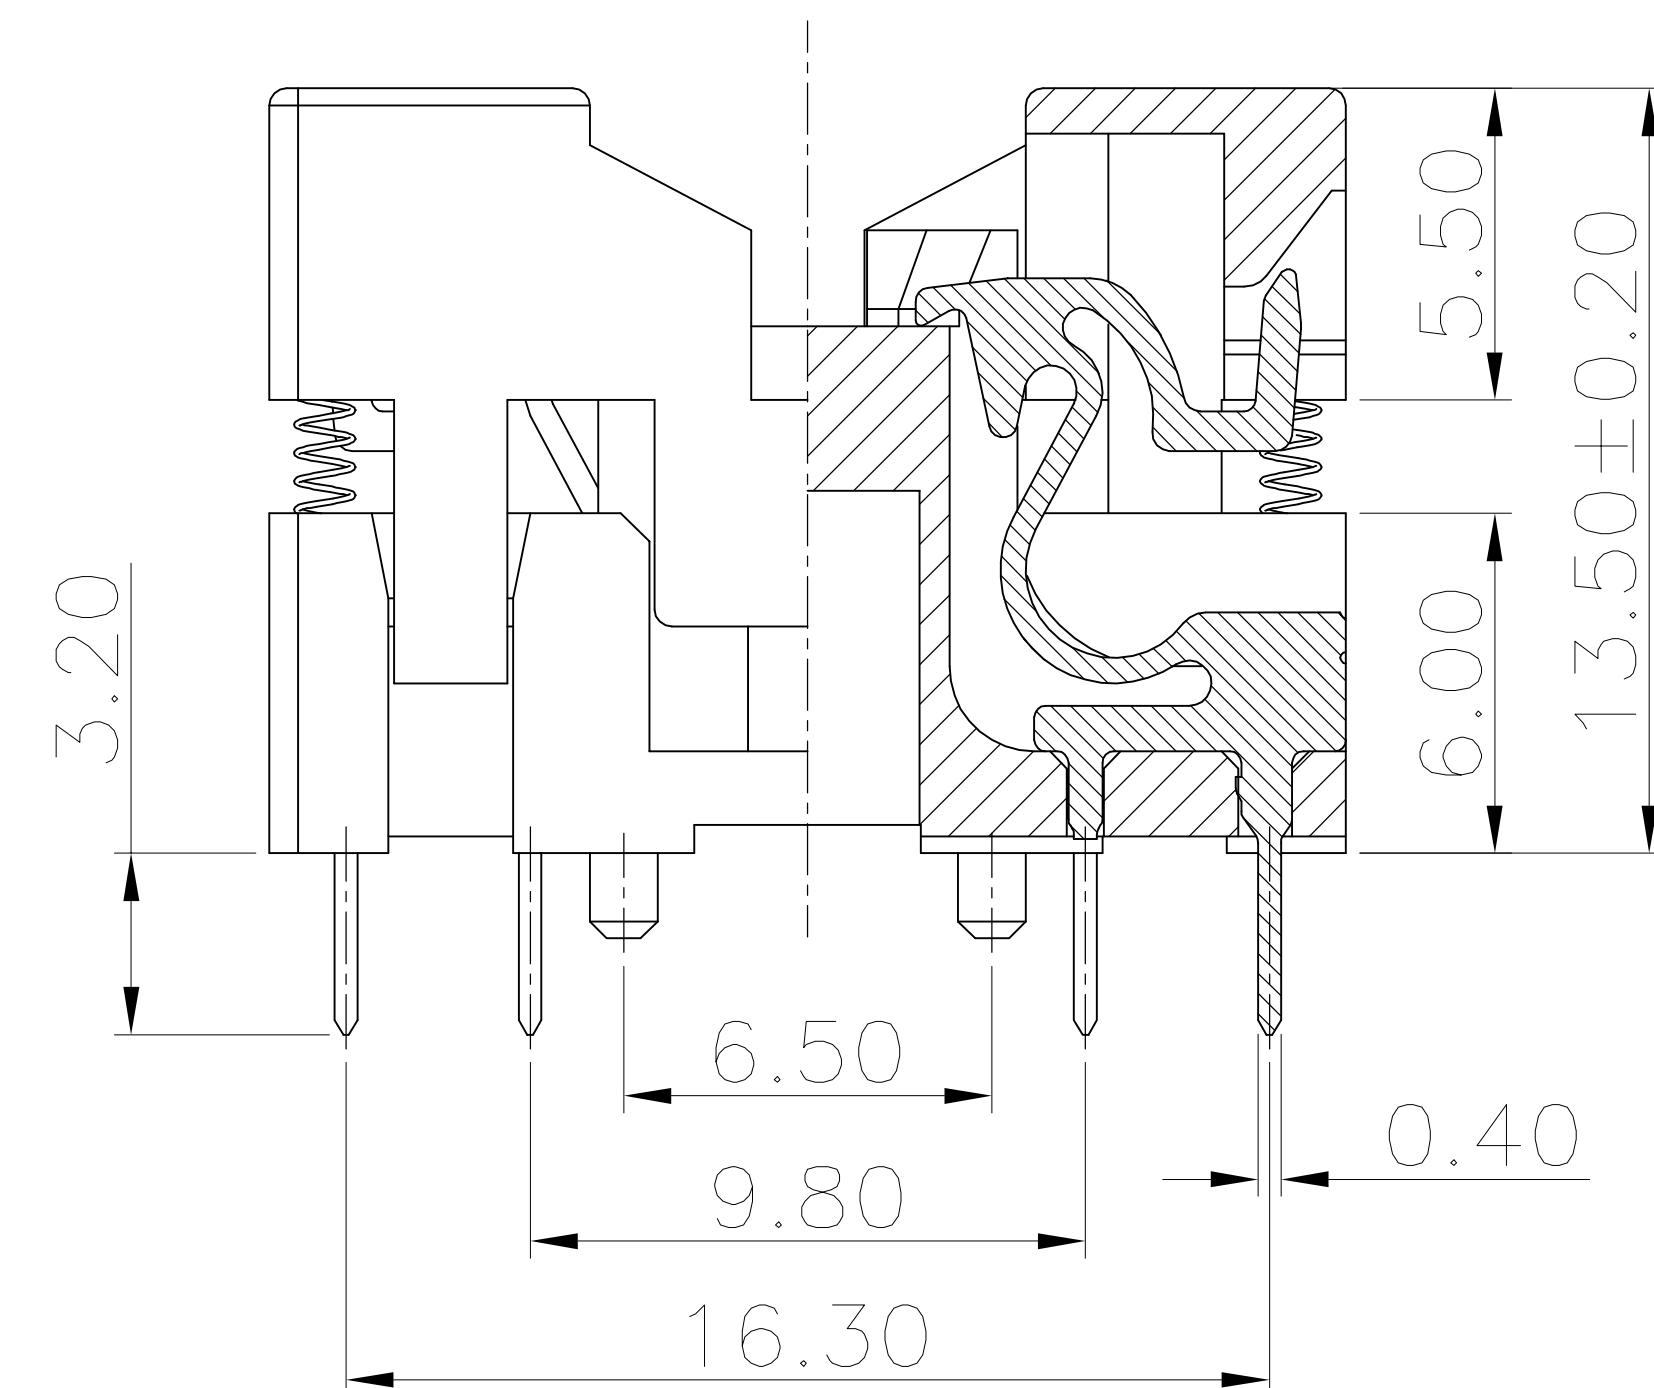


SEC:A-A

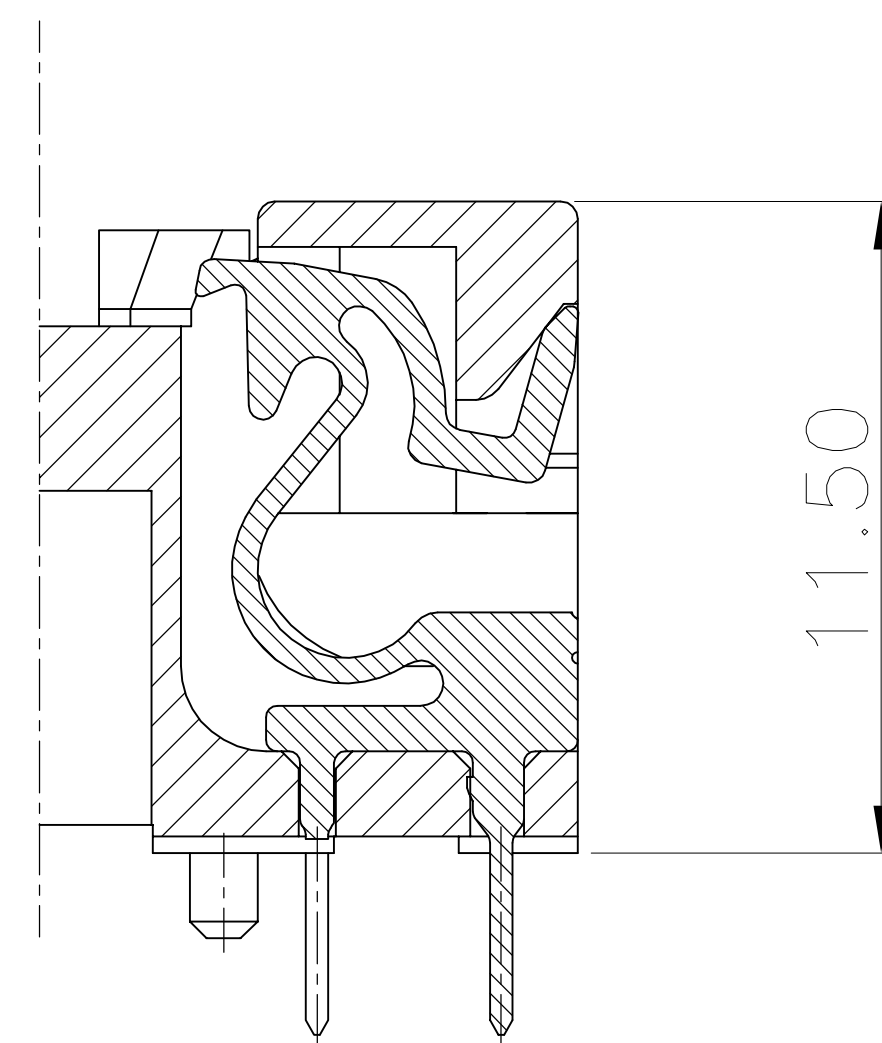


Contact Retracted

SEC:A-A

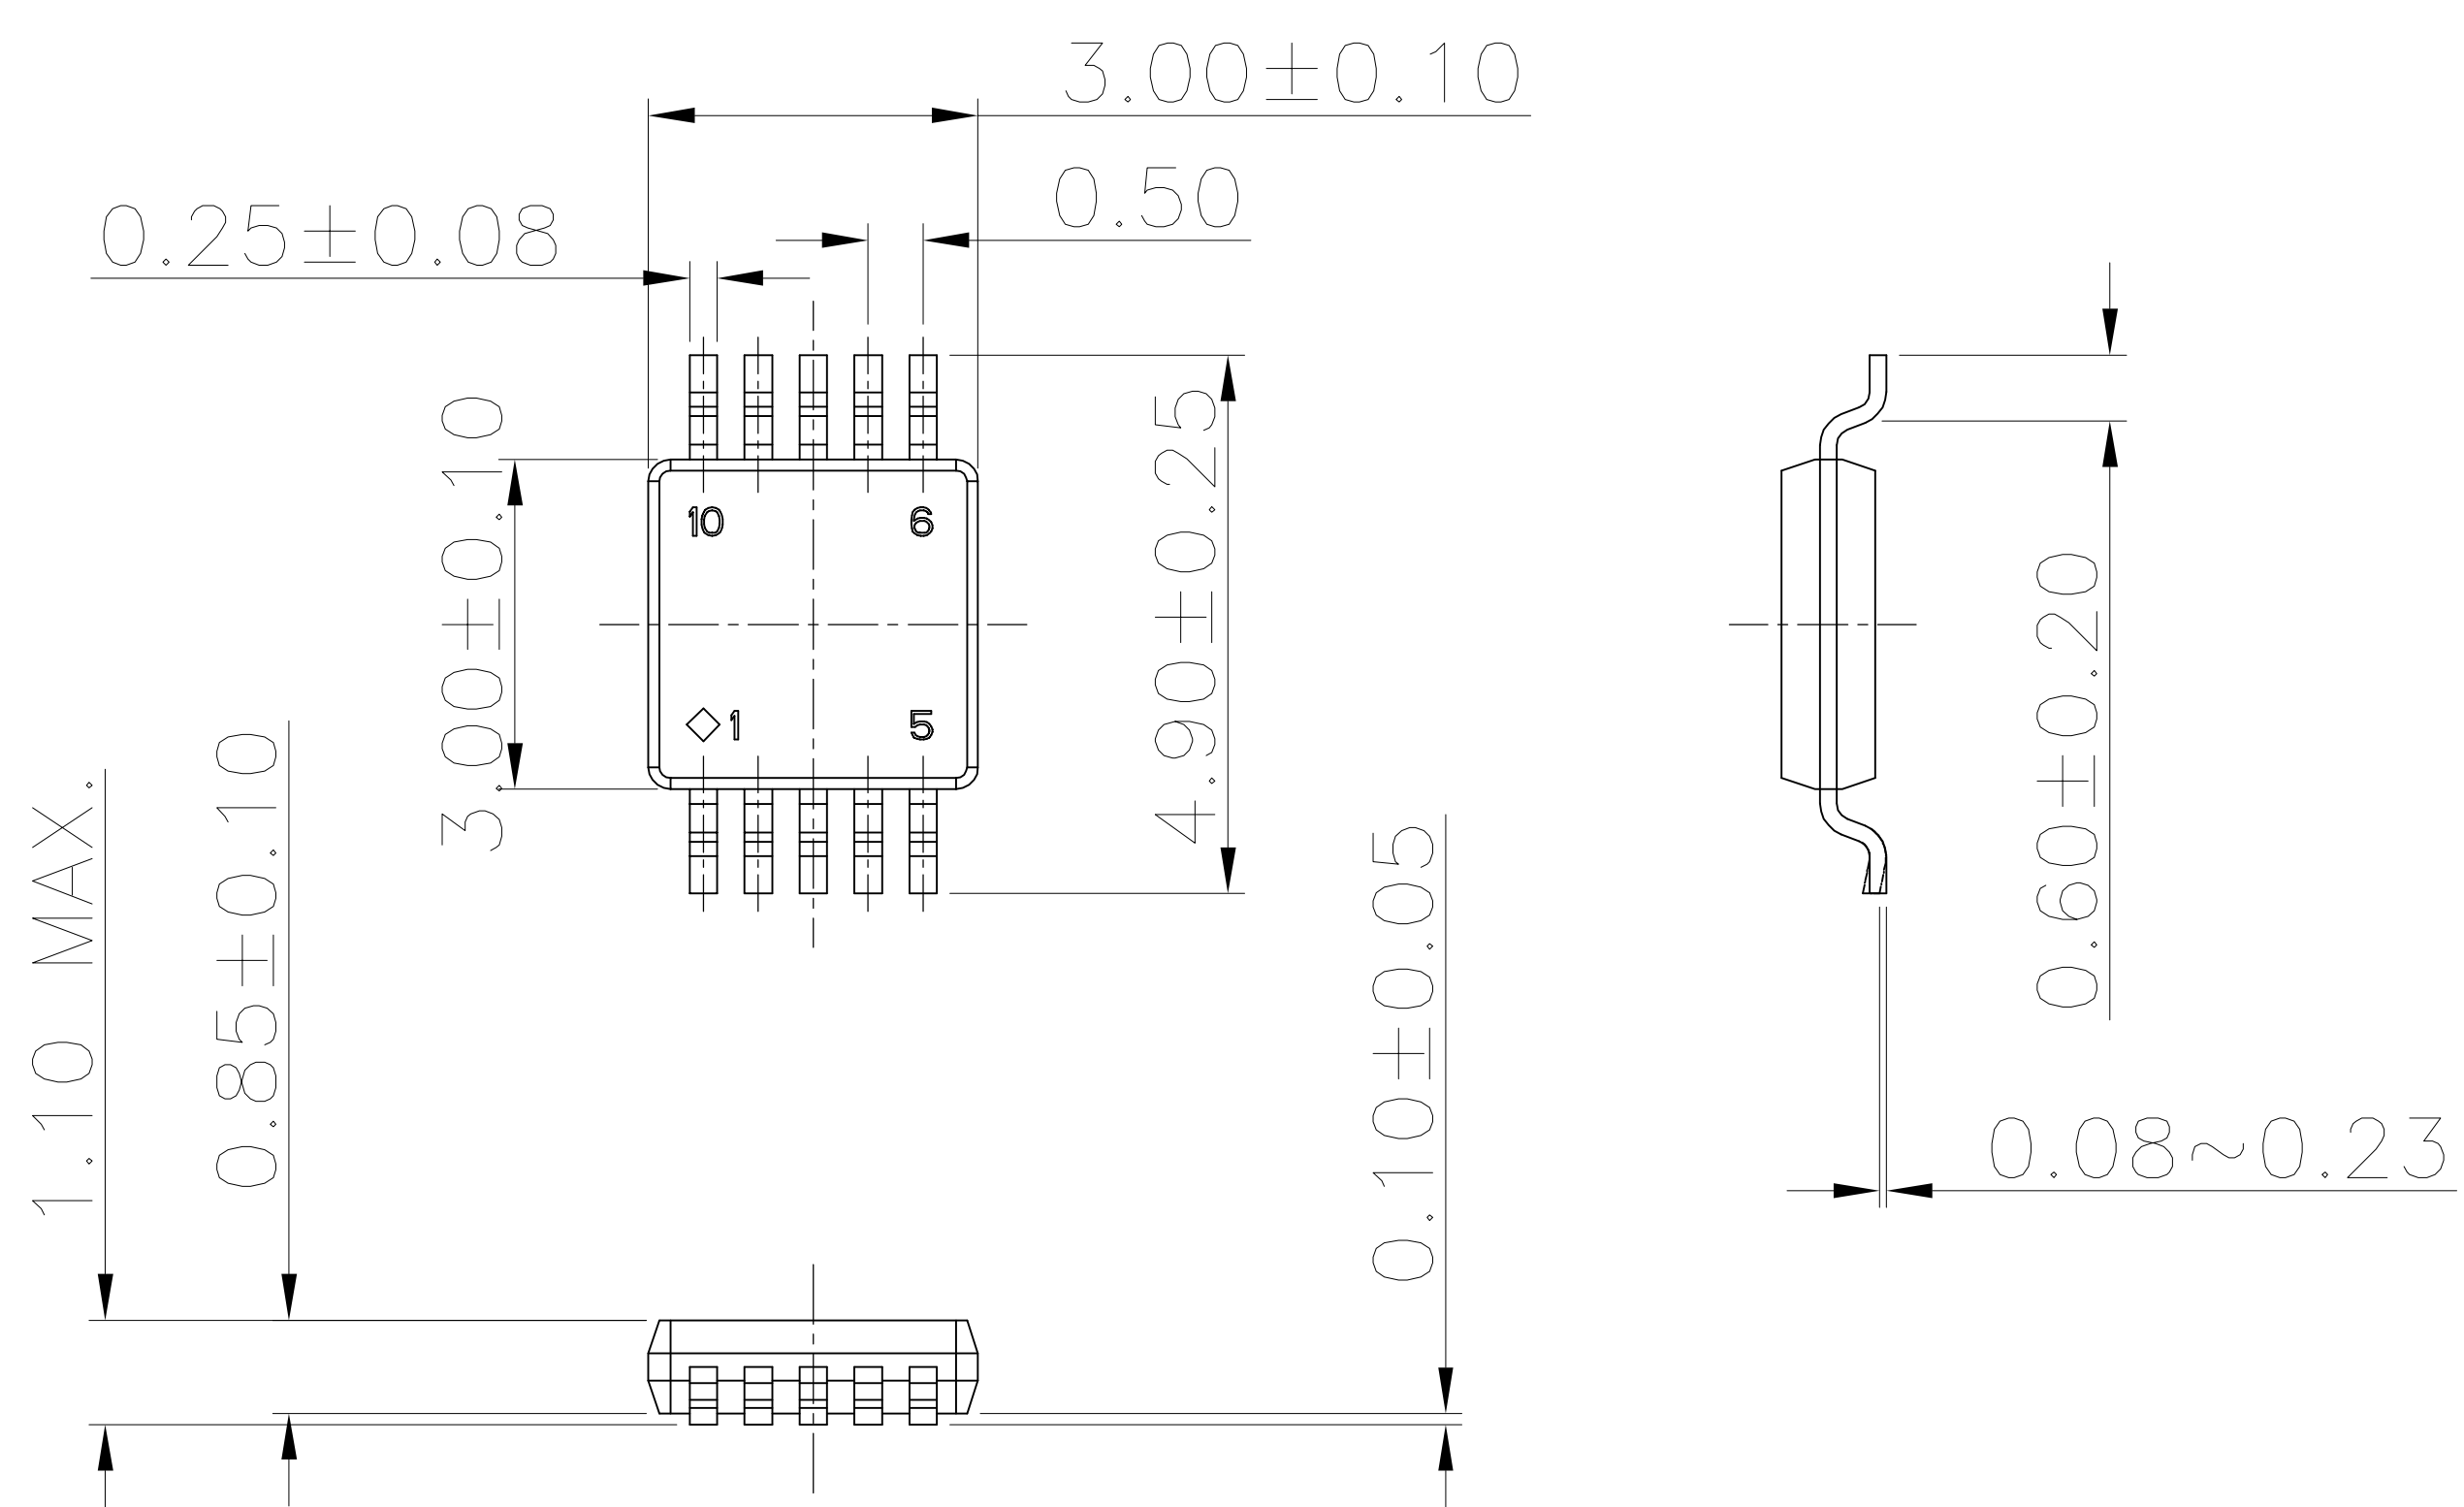


APPLICABLE IC

SCALE: 2:1

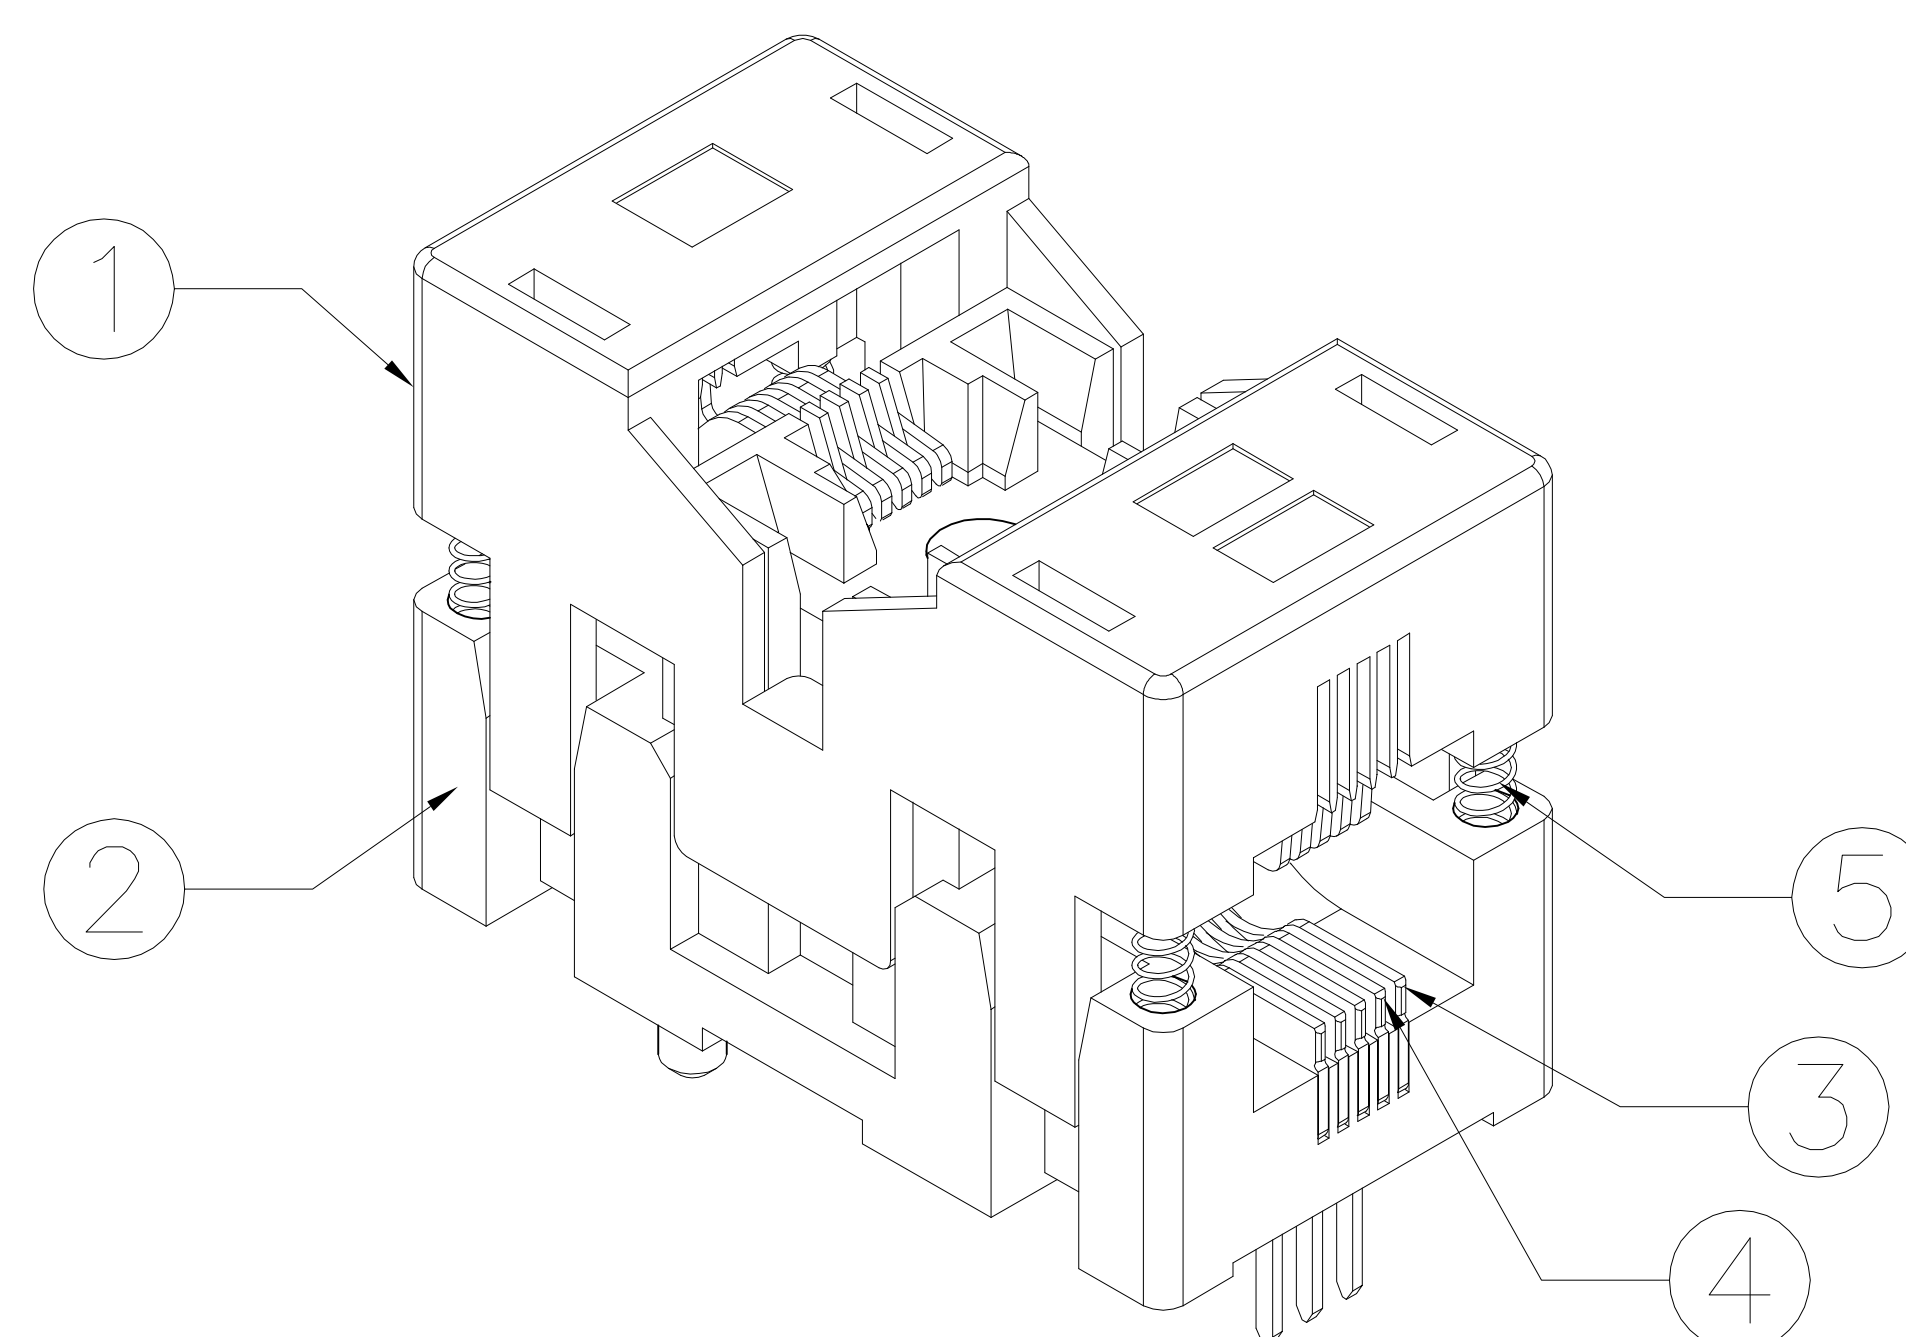

PERFORMANCE

1. Insulation Resistance: 1000mΩ Min. At DC 500V
2. Dielectric Withstanding Voltage For 1 Minute At AC 700V
3. Contact Resistance 30mΩ MAX. at 10mA and 20mV MAX. (Initial)
4. Operation Temperature -65° C ~+175° C
5. Life Span 15,000 Times (Mechanical)

						TOLERANCE	PROJECTION		GENERAL TOLERANCES	± 0.10	TITLE	SSOP10-0.5 SOCKET
									R E V	A0	CLASS	SSOP10-0.5-TP01NT
5	30-B-4505B	SPRING	SUS	4	FOR COVER	X. ± 0.50	DIMENSION:	mm	SCALE:	1:1	DRW. NO	KZT-20151022-003
4	SSOP10-0.5-TPJTB	CONTACT	BeCu	4	Au PLATING	X. X ± 0.25	APP:		DATE:			
3	SSOP10-0.5-TPJTA	CONTACT	BeCu	6	Au PLATING	X. XX ± 0.10	CHECK:		DATE:			
2	SSOP10-0.5-TPCR	COVER	PEI	1	BLACK	X. XXX ± 0.05	DEGK:	Tang	DATE:	2015-10-22		
1	SSOP10-0.5-TPBY	BODY	PEI	1	BLACK							
No.	Part Number	Name	Material	Q/ty	Note							

