

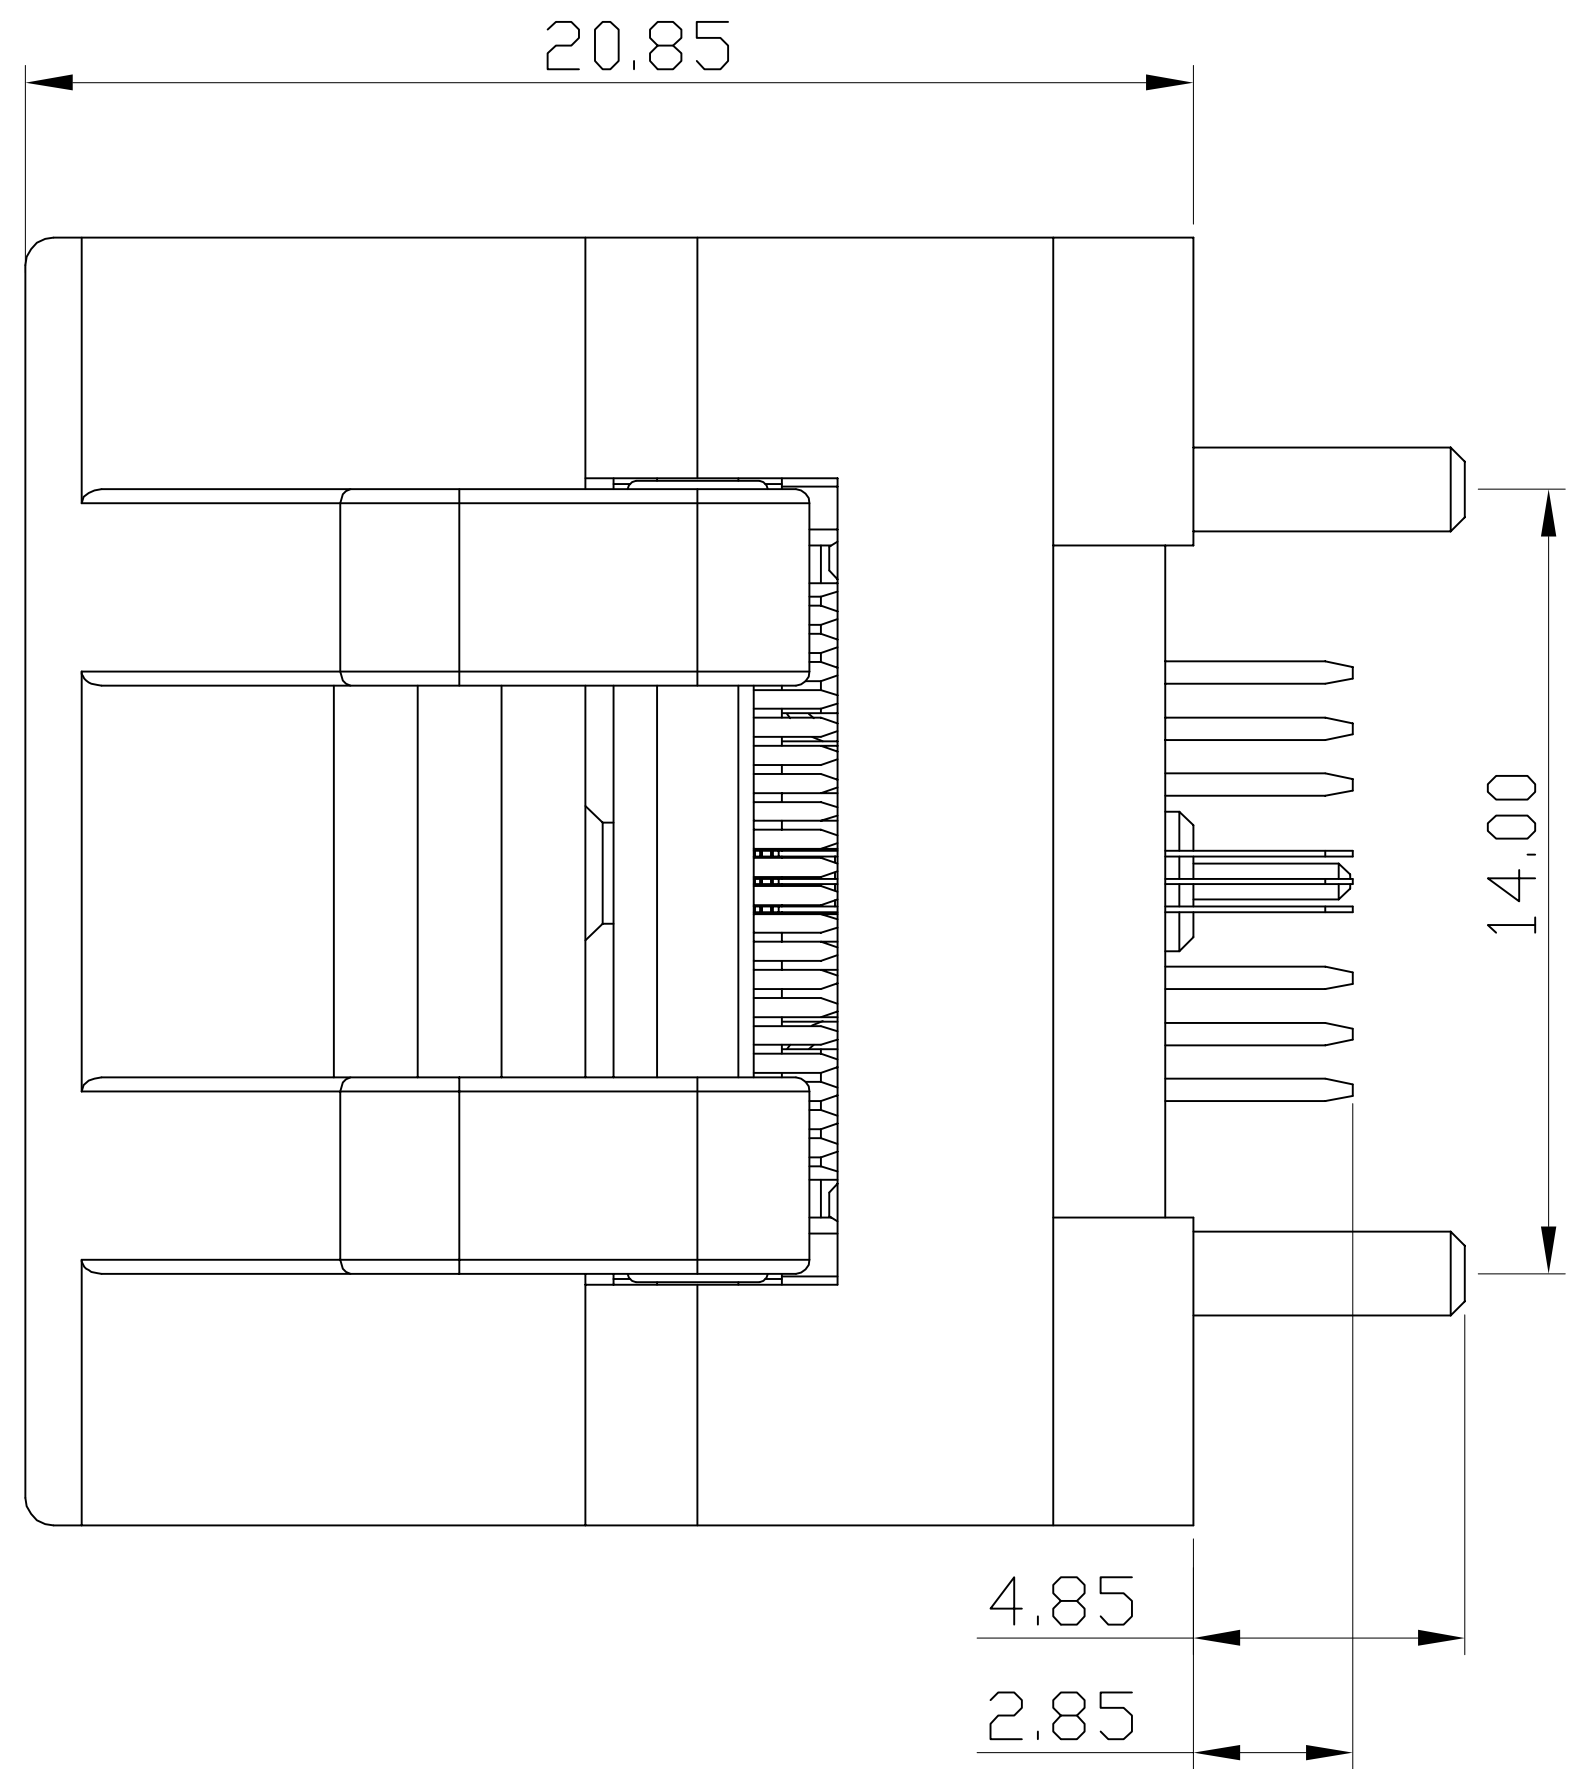





	REVISION	DESCRIPTION	CHECK	APP	DATE	REV.NOTICE.NO
△ 1						
△ 2						
△ 3						

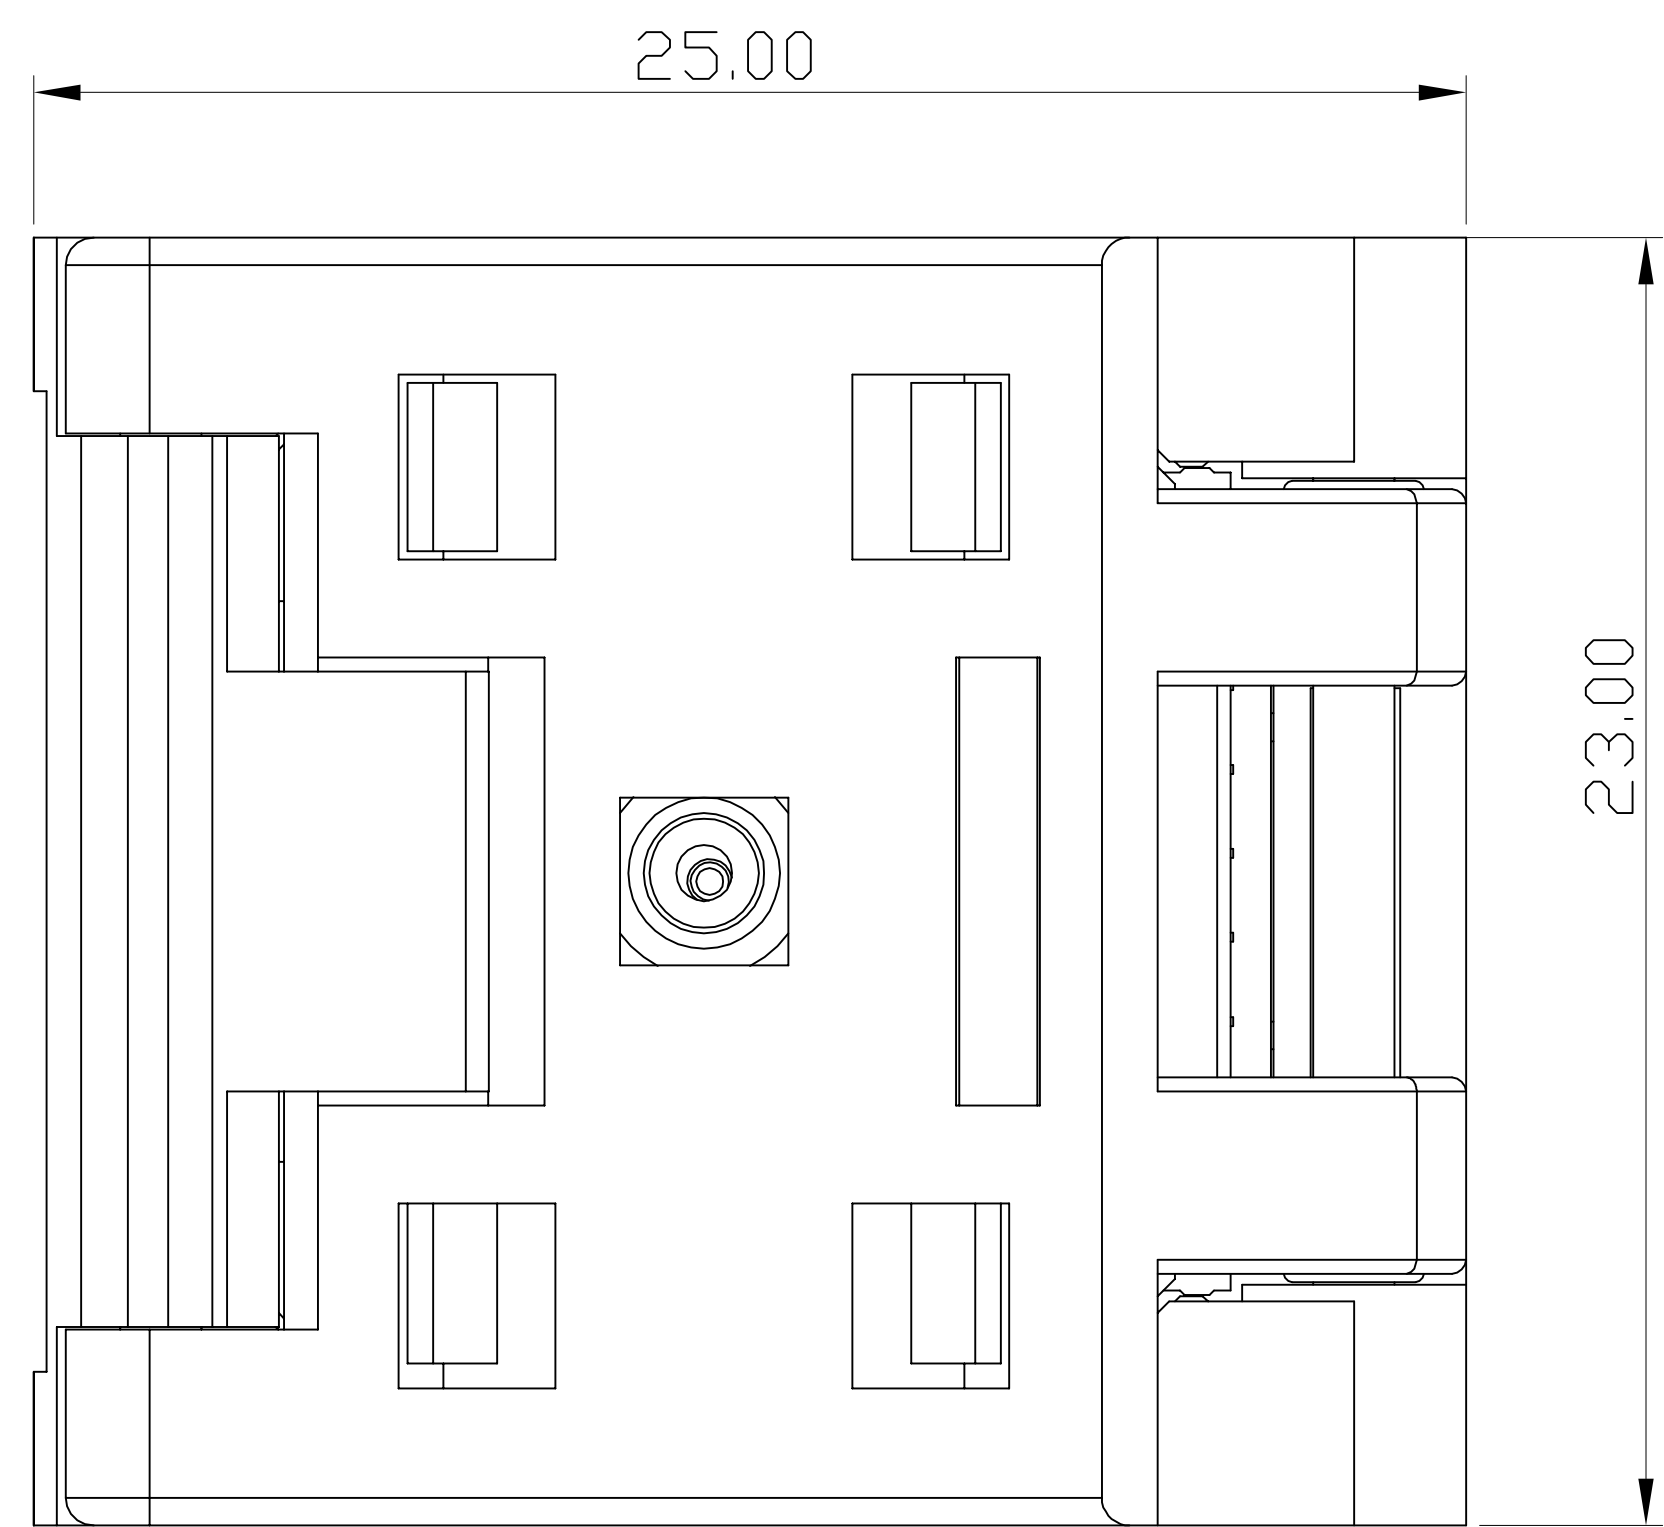

PCB Pattern(TOP View)

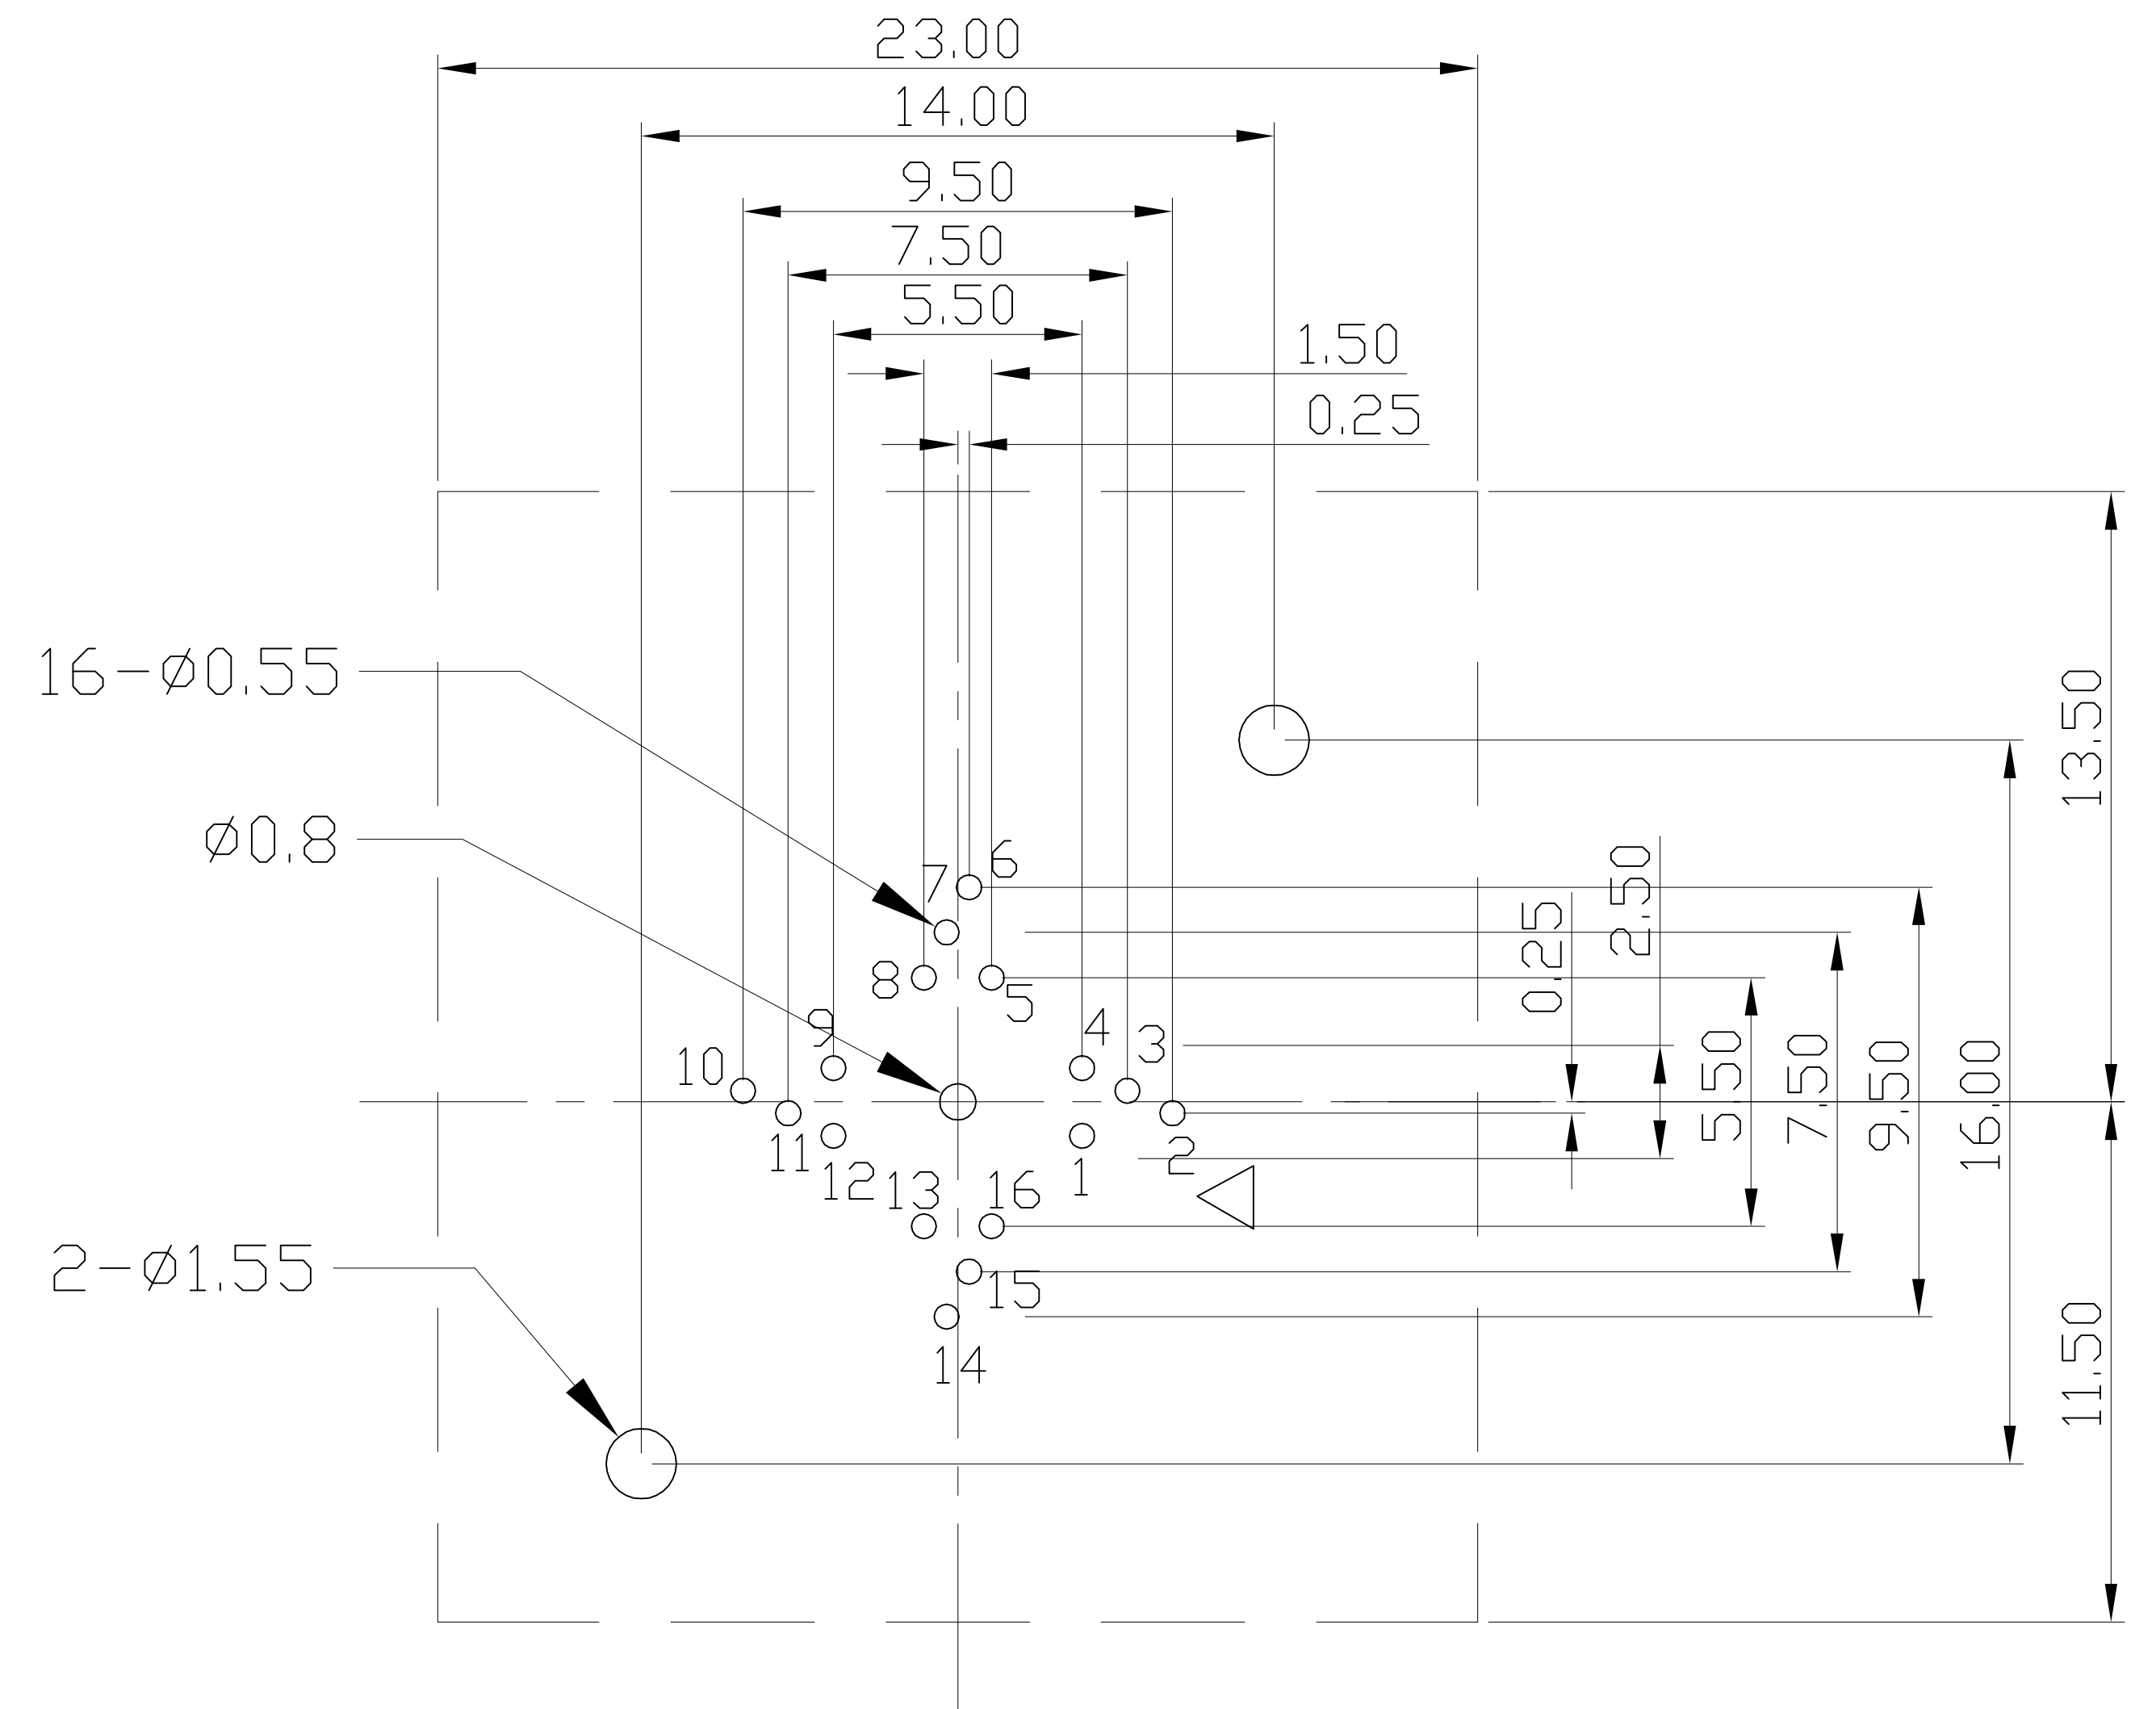

Applicable IC

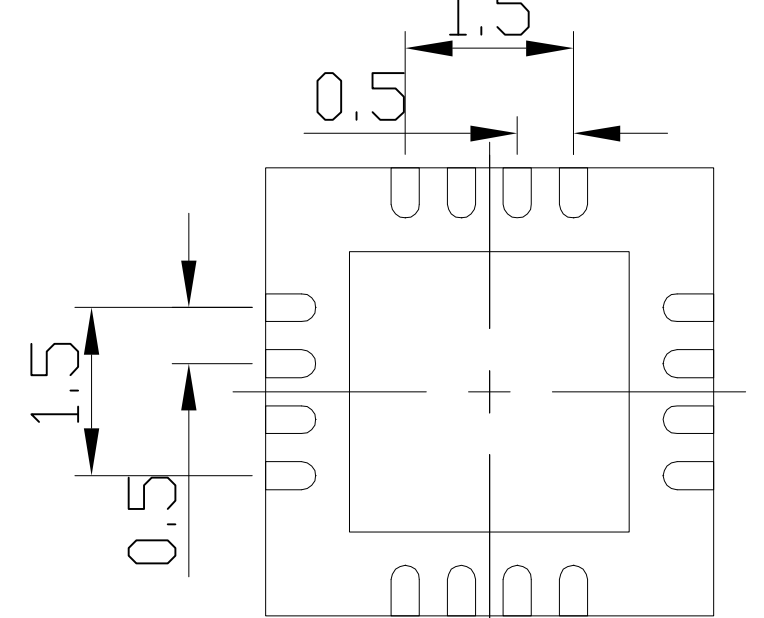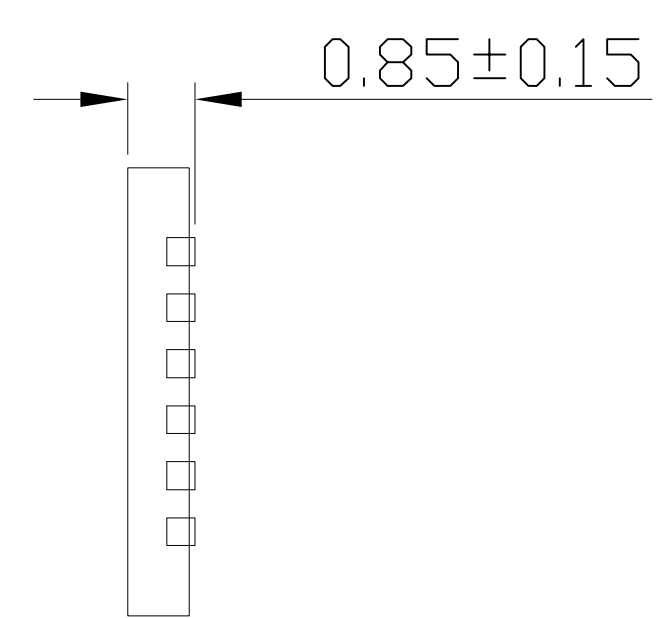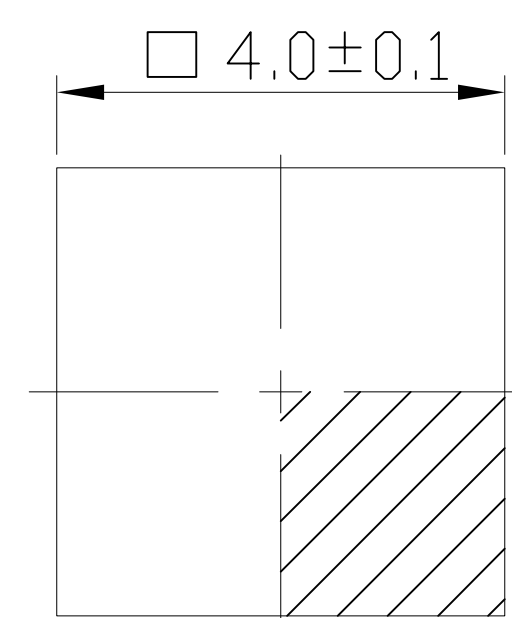

TOP VIEW

SIDE VIEW

BOTTOM VIEW

PERFORMANCE

- 1、Insulation Resistance: 1000M Ω Min.At DC 500V
- 2、Dielectric Withstanding Voltage For 1 Minute At AC 700V
- 3、Contact Resistance 30m Ω MAX. at 10mA and 20mV MAX.(Initial)
- 4、Current Rating: 1A max.
- 5、Operation Temperature -40°C ~+155°C
- 6、Life Span 15,000 Times (Mechanical)
- 7、Operation Force 2.0 Kg MAX

TOLERANCE	PROJECTION		GENERAL TOLERANCES	±0.10	TITLE	QFN16-0.5 SOCKET
X.	± 0.50	DIMENSION:	mm	SCALE:	CLASS	QFN16-0.5-TP02GT
X.X	± 0.25	APP:		DATE:	DRW.NO	6U-PWQFN-0.5-16-4X4-01
X.XX	± 0.10	CHECK:		DATE:		
X.XXX	± 0.05	DEGK:		DATE: 20130702		

