



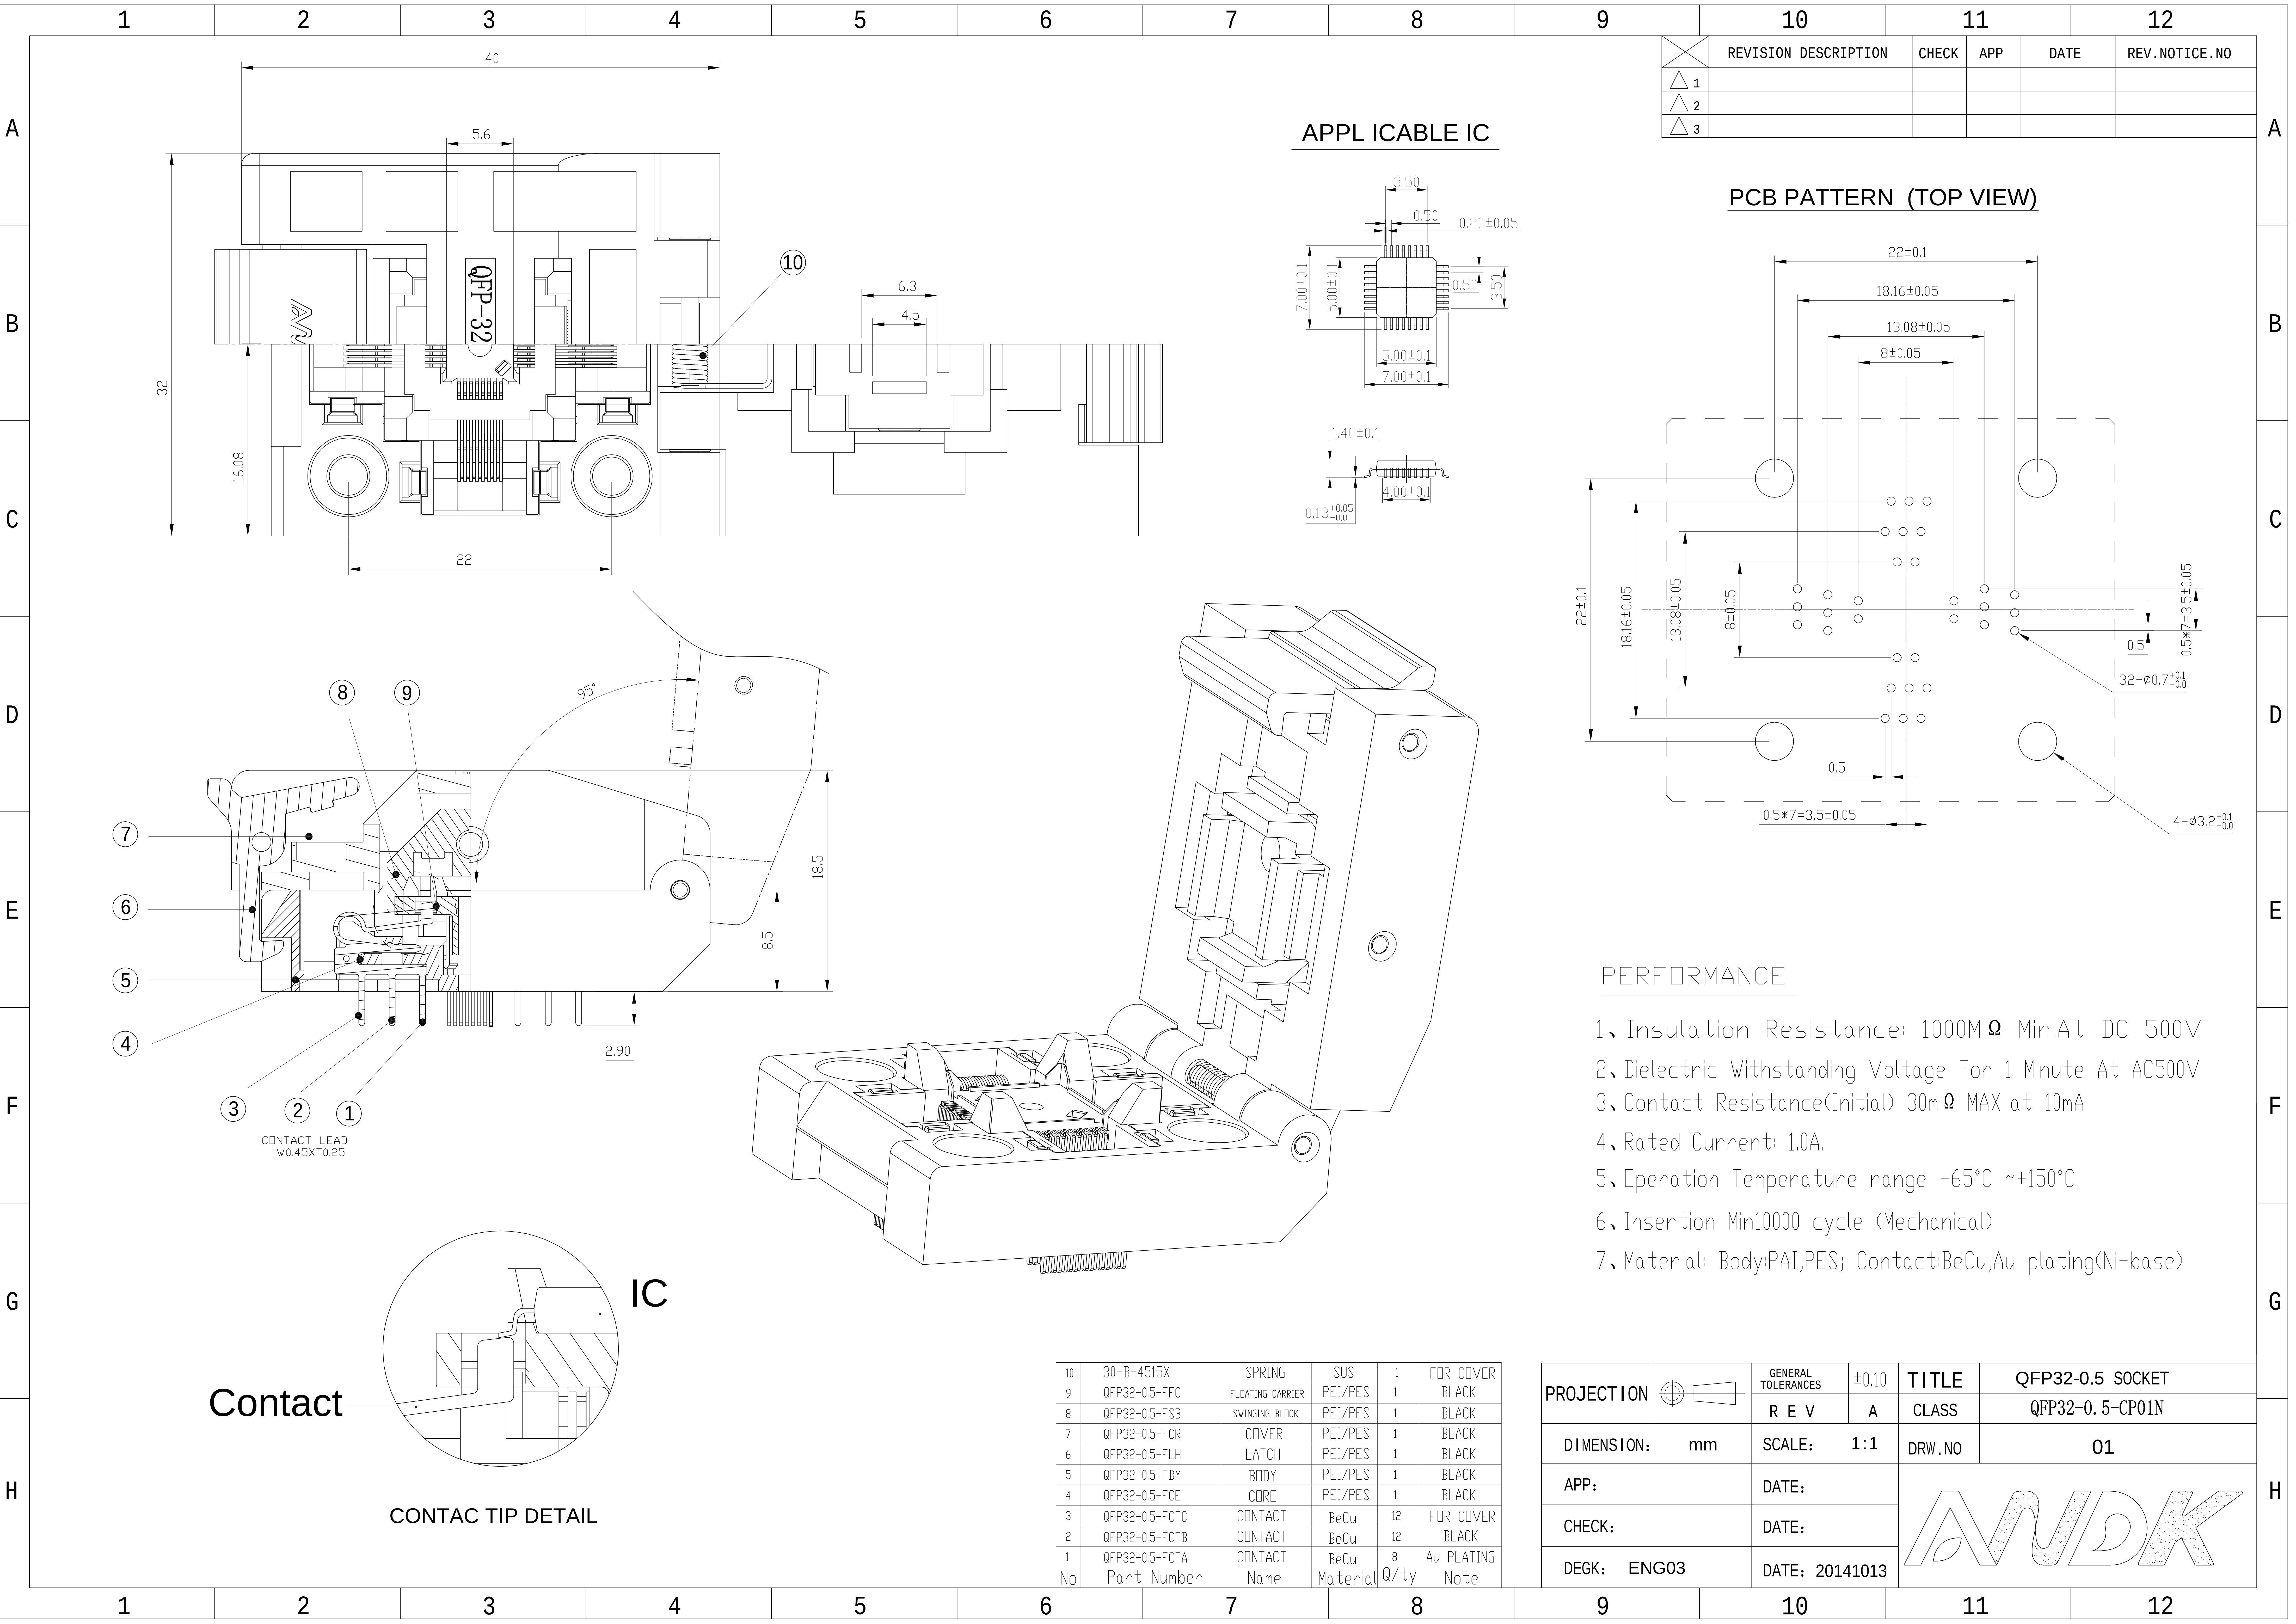

	REVISION	DESCRIPTION	CHECK	APP	DATE	REV.NOTICE.NO
△ 1						
△ 2						
△ 3						

PCB PATTERN (TOP VIEW)

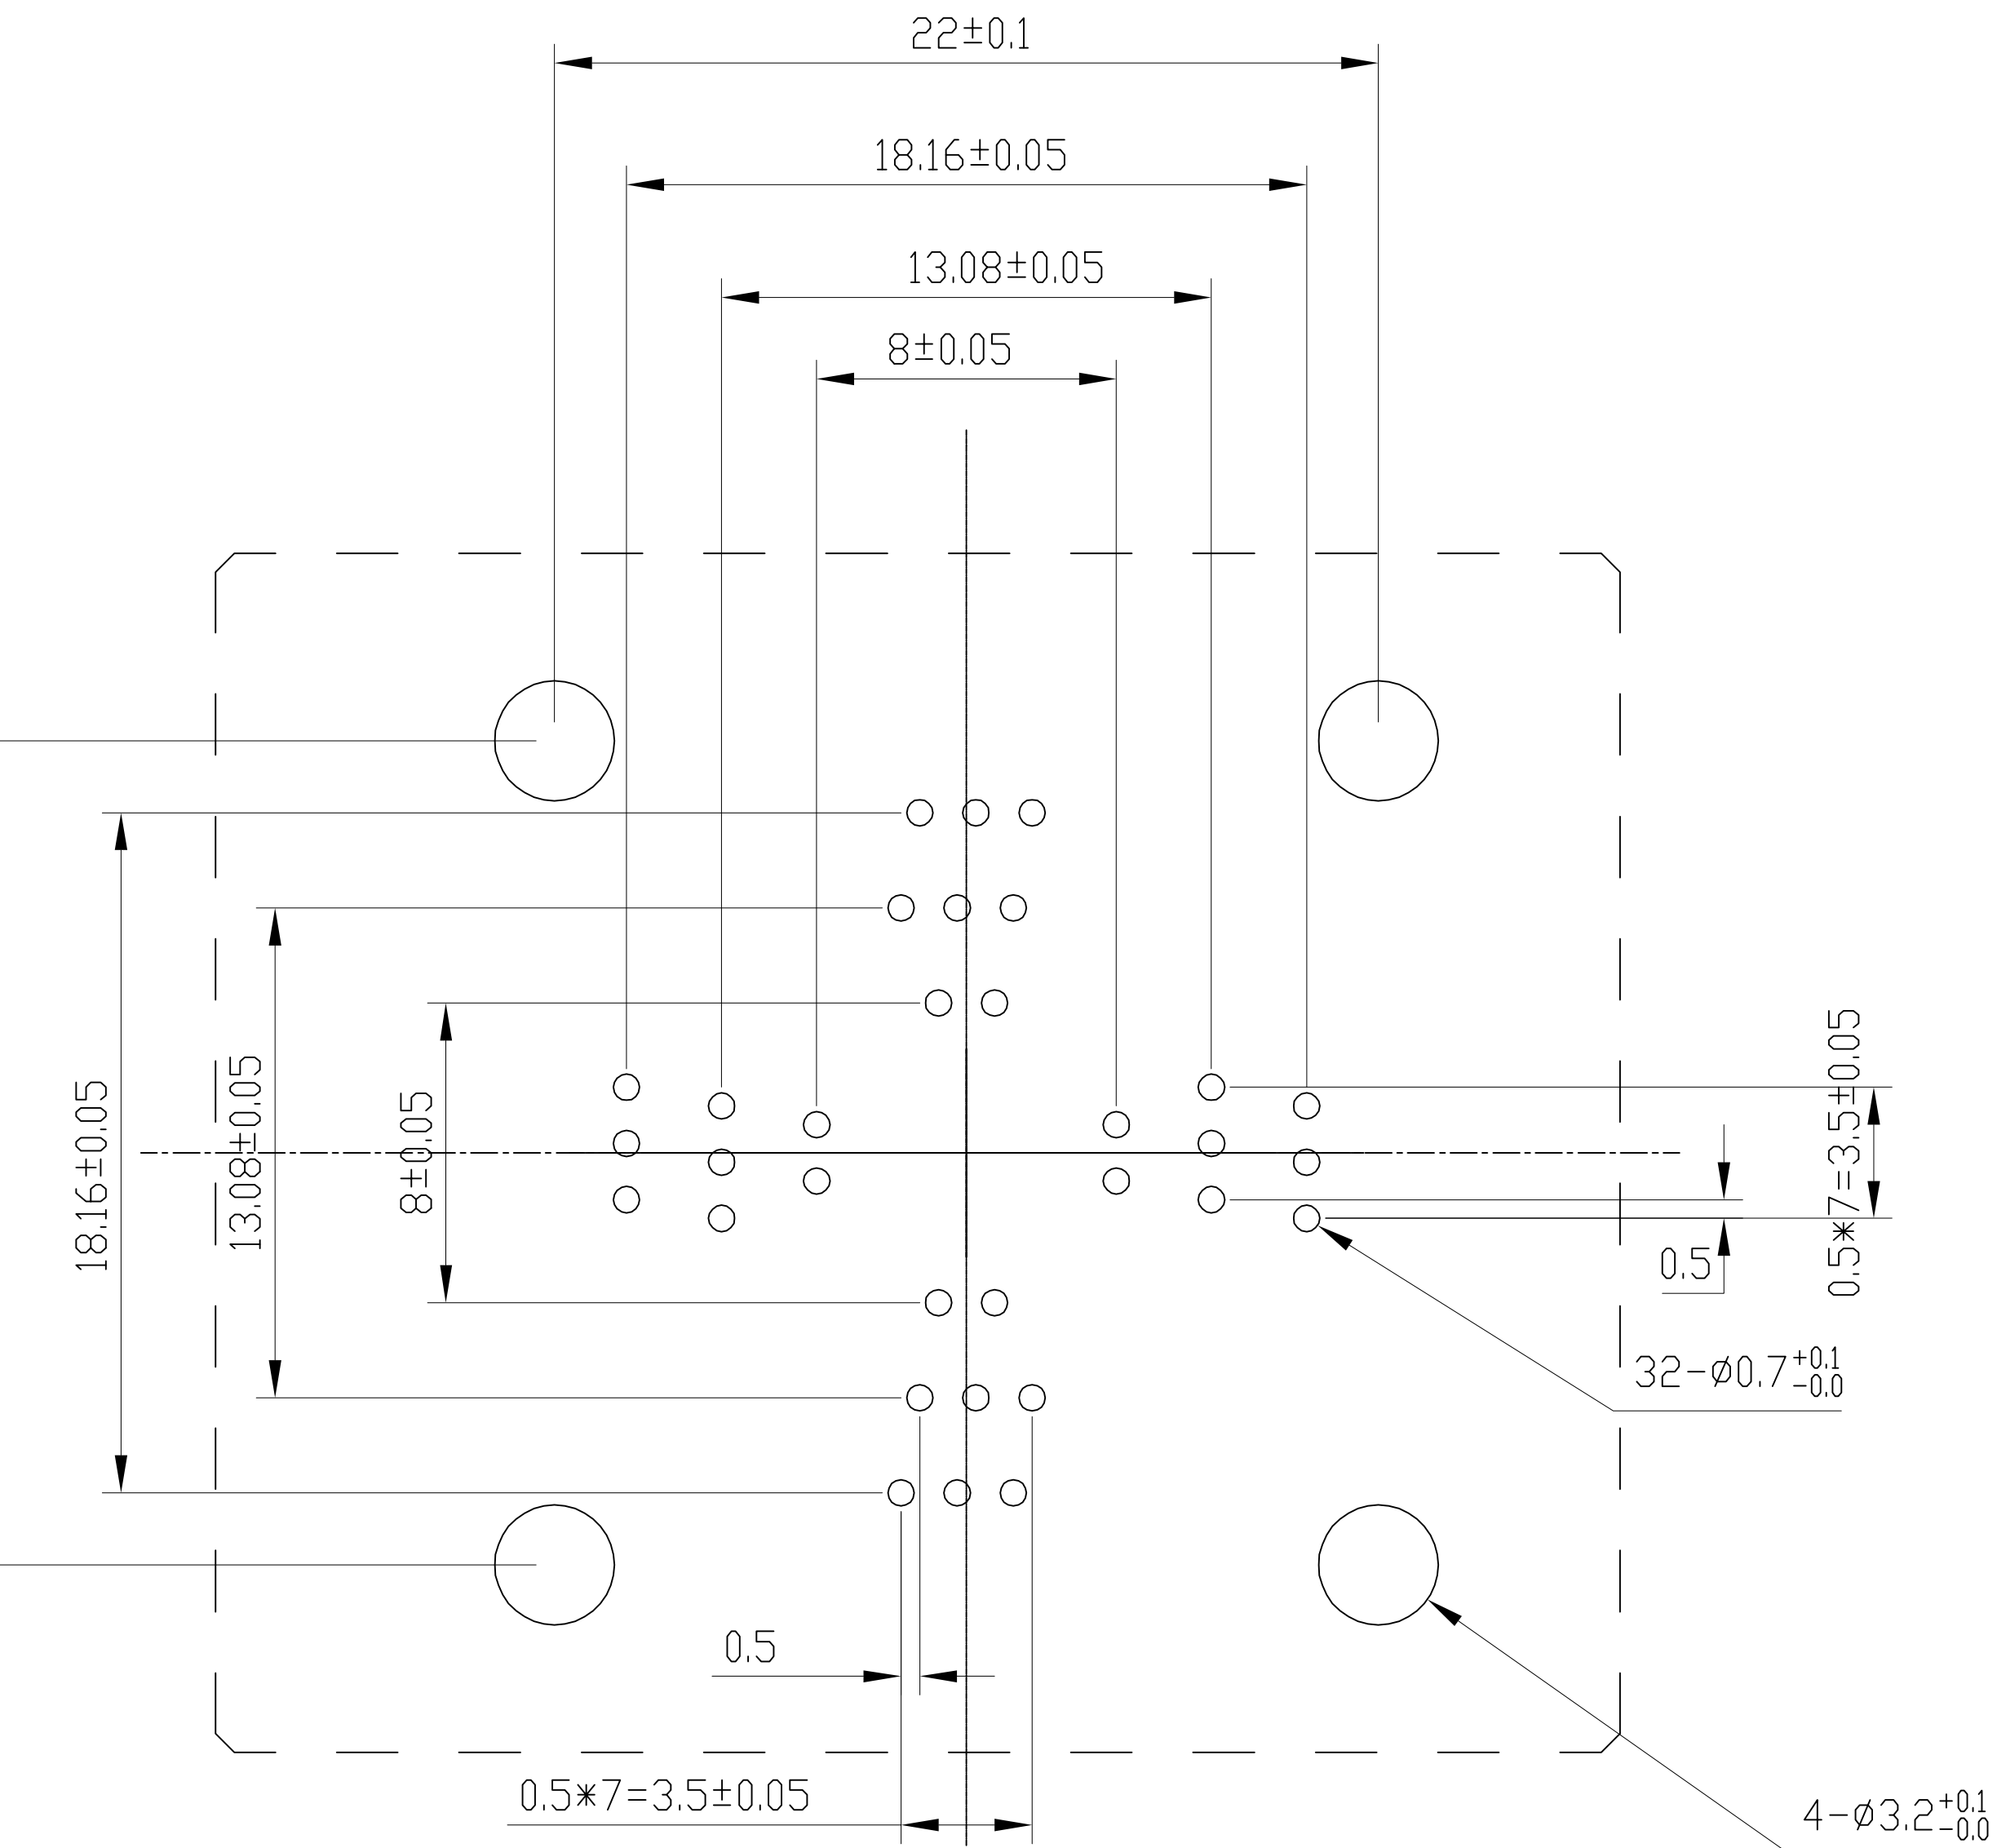

PERFORMANCE

- 1、Insulation Resistance: 1000M Ω Min.At DC 500V
- 2、Dielectric Withstanding Voltage For 1 Minute At AC500V
- 3、Contact Resistance(Initial) 30m Ω MAX at 10mA
- 4、Rated Current: 10A.
- 5、Operation Temperature range -65°C ~+150°C
- 6、Insertion Min10000 cycle (Mechanical)
- 7、Material: Body:PAI,PES; Contact:BeCu,Au plating(Ni-base)

10	30-B-4515X	SPRING	SUS	1	FOR COVER
9	QFP32-0.5-FFC	FLOATING CARRIER	PEI/PES	1	BLACK
8	QFP32-0.5-FSB	SWINGING BLOCK	PEI/PES	1	BLACK
7	QFP32-0.5-FCR	COVER	PEI/PES	1	BLACK
6	QFP32-0.5-FLH	LATCH	PEI/PES	1	BLACK
5	QFP32-0.5-FBY	BODY	PEI/PES	1	BLACK
4	QFP32-0.5-FCE	CORE	PEI/PES	1	BLACK
3	QFP32-0.5-FCTC	CONTACT	BeCu	12	FOR COVER
2	QFP32-0.5-FCTB	CONTACT	BeCu	12	BLACK
1	QFP32-0.5-FCTA	CONTACT	BeCu	8	Au PLATING
No	Part Number	Name	Material	Q/ty	Note

PROJECTION		GENERAL TOLERANCES	±0.10	TITLE	QFP32-0.5 SOCKET
		R E V	A	CLASS	QFP32-0.5-CP01N
DIMENSION:	mm	SCALE:	1:1	DRW.NO	01
APP:		DATE:			
CHECK:		DATE:			
DEGK: ENG03		DATE: 20141013			