




IR Receiver Modules for Remote Control Systems

Description

The PC3638 is remote control receiver modules. Pin diode and receiver IC are assembled on one module. Small-sized, light-weight, and low current consumption. modules have been achieved by using resin mold. The demodulated output signal can directly be decoded by a microprocessor. The main benefit is the reliable function even in disturbed ambient and the protection against uncontrolled output pulses.

Dimensions

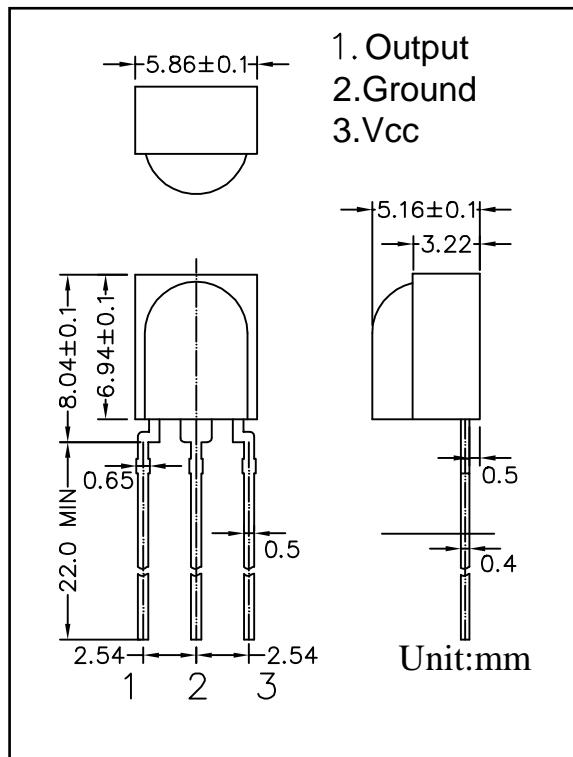



Features

- ◆ Supply Voltage Range: 2.7V to 5.5 V
- ◆ TTL and CMOS compatibility
- ◆ Photo detector and preamplifier in one package.
- ◆ Internal filter for PCM frequency
- ◆ Output active low
- ◆ Enhanced Immunity against all kinds of disturbance light
- ◆ No occurrence of disturbance pulses at output pin with in nominal conditions.
- ◆ Short settling time after power On.
- ◆ Meet RoHS

Applications


- ◆ Audio video applications
- ◆ Home appliances
- ◆ Toy applications
- ◆ Remote control equipment


Application Circuit

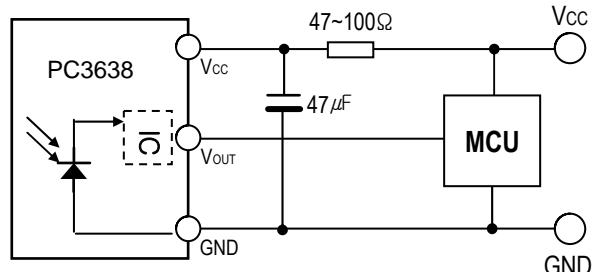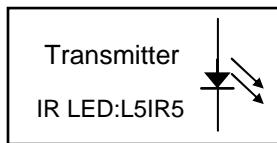

R-C filter recommended to suppress power supply disturbances.
R-C filter should be connected closely between Vcc pin and GND pin.

Block Diagram

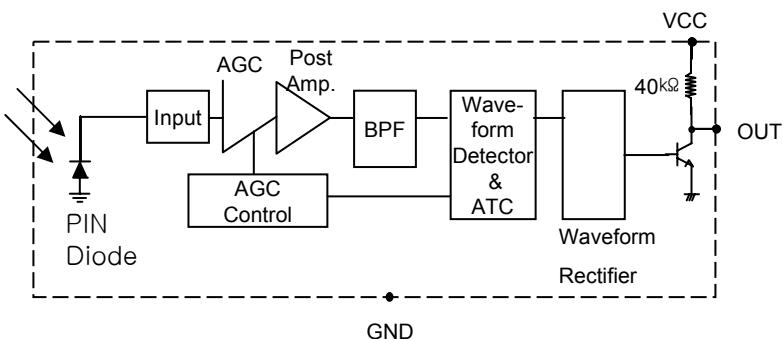

**Absolute Maximum Ratings**

(Ta = 25°C)

Parameter	Symbol	Min.	Max.	Unit	Conditions
Supply Voltage	Vcc	0	6.0	V	
Output Voltage	Vout	0	6.0	V	
Output Current	Iout	0	2.5	mA	
Storage Temperature	Tst	-25	85	°C	
Soldering Temperature	Tsd	260°C±5°C		°C	Max 5 sec

Recommended Operating Conditions

(Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Operating Voltage	Vcc	2.7	-	5.5	V	
Input Frequency	f _{in}	30	38	60	kHz	
Operating Temperature	T _{op}	-20	25	80		


Electro-optical Characteristics

Specifications hold over the Recommended Operating Conditions, unless otherwise noted herein.


All values are at **25** and **Vcc=3.0V/5.0V**

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
Supply Voltage	Vcc	--		2.7	--	5.5	V
Working Temperature	T _{opr}	--		-20	25	80	°C
Current Consumption	I _{cc}	Input Singnal=0		--	0.8	1.5	mA
Max Input Current	I _{in}	V _{in} =0V		0.3	--	0.8	mA
Half Angle	△θ	--		--	±45	--	deg
B.P.F. Center Frequency	F _o	--		--	37.9	--	kHz
Reception Distance	d	200±5Lux	Vcc=3V	8	12	--	m
			Vcc=5V	10	12	--	m
Peak Wavelength	λ _p	--		--	940	--	nm
Singnal Output	S _o	--		--Active Low--			
High Level Output Voltage	V _{oh}	--		4.5	5.0	--	V
Low Level Output Voltage	V _{ol}	--		--	0.2	0.4	V
High Level Pulse Width	T _{wh}	Burst Wave=600μs		500	600	700	μs
Low Level Pulse Width	T _{wl}			500	600	700	μs


[Fig. 1] Data Signal diagram

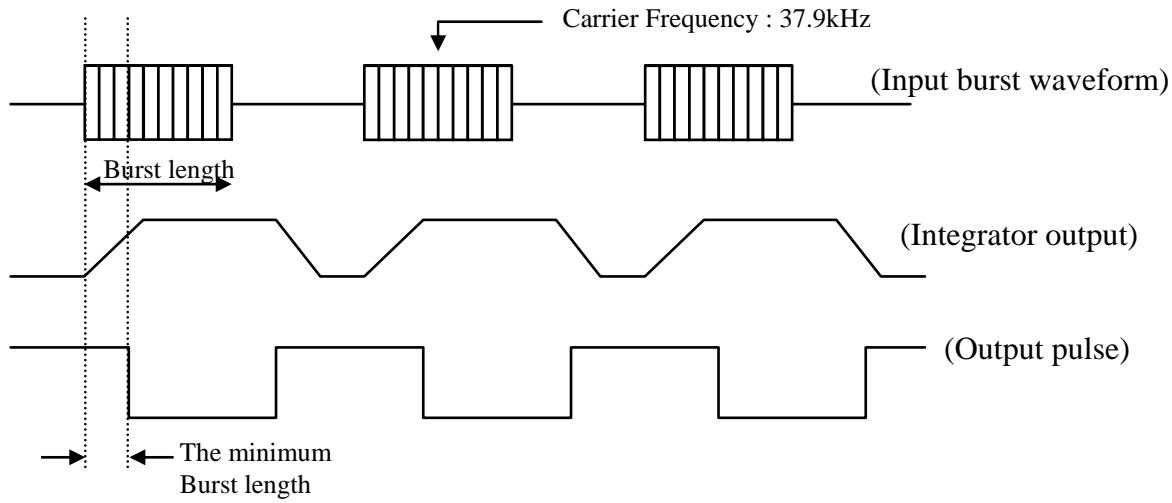

[Fig.2] Transmitter

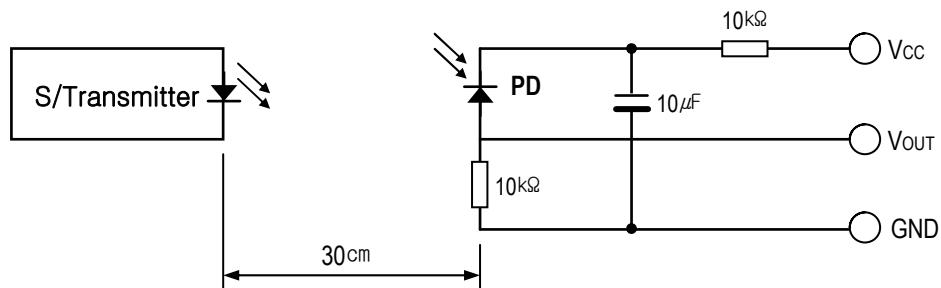

[Fig.3] Test condition of arrival distance

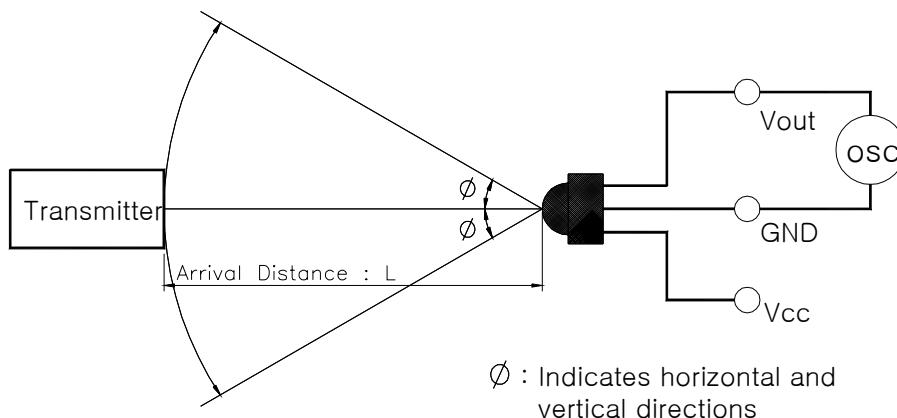


[Measurement condition for arrival distance]

Ambient light source : Detecting surface illumination shall be irradiate 200 ± 50 Lux under ordinary white fluorescence lamp without high frequency lighting




Electrical/Optical Characteristics


[Fig.4] Supply Current vs. Voltage

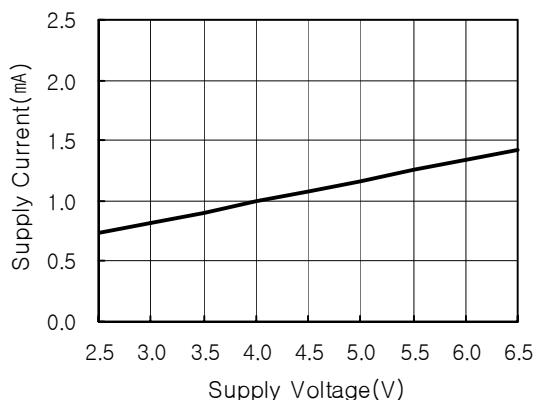


[Fig.5] Sensitivity vs. Supply Voltage

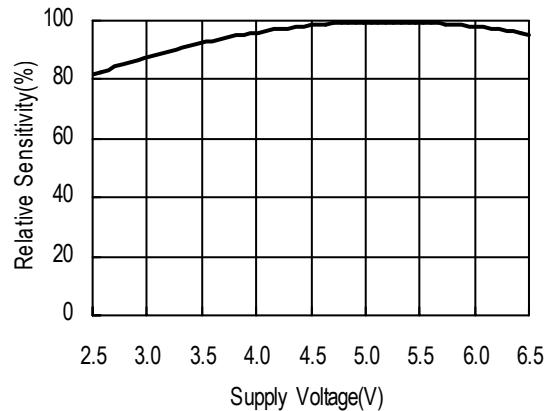


[Fig.6] Output Pulse Width vs. Distance

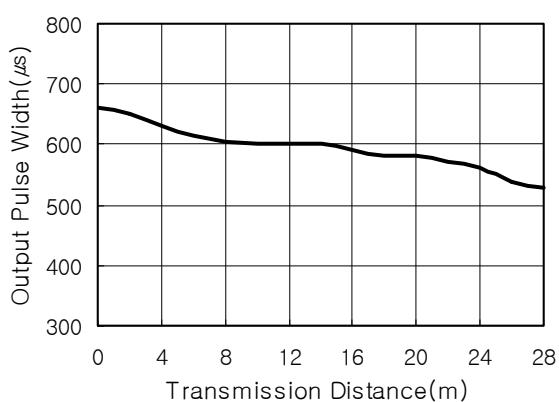

[Fig.7] Directivity (Horizontal)

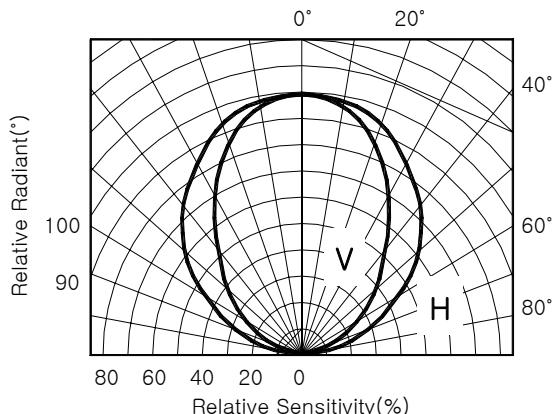

[Fig.8] BPF Fc Curve

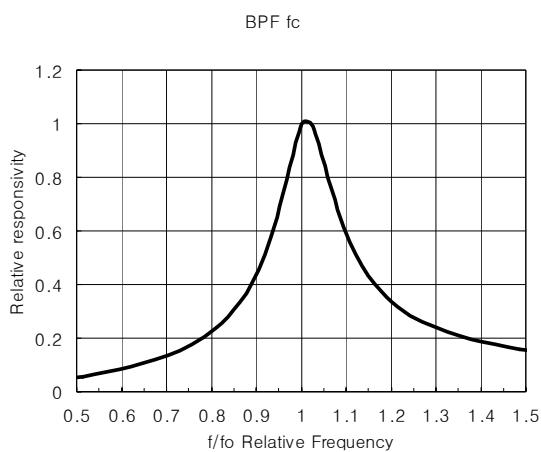

ESD Test Results

Parameter	Conditions	Specification	Results
Machine Model	C=200pF, R=0Ω	Min ±200V	>±200V
Human Body Model	C=100pF, R=1.5kΩ	Min ±2000V	>±2000V
Charged Device Model	R=100MΩ, 1Ω	Min ±800V	>±800V