


AM/FM RADIO RECEIVER

DESCRIPTION


The SA2003 is AM/FM radio IC (FM F/E+AM/FM IF) which is designed for AM/FM radios. Combining with the UTC7368 (Mono PW IC), a suitable AM/FM radio system is able to be constituted.

FEATURES

- * FM IFT, AM IFT and FM detector coil are not needed.
- * Pin compatible of TA8164P.
- * Operating supply voltage range: $V_{cc(opr)}=1.8\sim 7V$ ($T_a=25^\circ C$)



DIP-16-300-2.54




SOP-16-225-1.27

ORDERING INFORMATION

Device	Package
SA2003	DIP-16-300-2.54
SA2003S	SOP-16-225-1.27

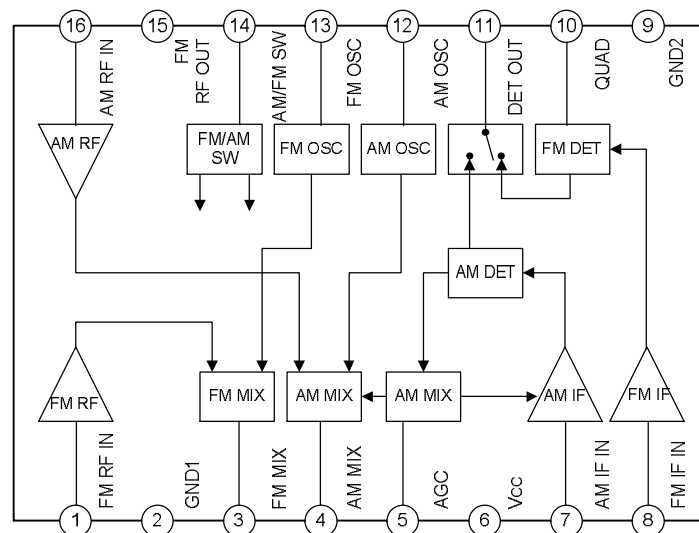BLOCK DIAGRAM



ABSOLUTE MAXIMUM RATINGS ($T_{amb}=25^\circ C$)


Characteristic	Symbol	Ratings	Unit
Supply Voltage	V_{cc}	8	V
Power Dissipation	DIP-16	750	mW
	SOP-16	350	
Operating Temperature	T_{opr}	$-25\sim 75$	$^\circ C$
Storage Temperature	T_{stg}	$-55\sim 150$	$^\circ C$

NOTE: Derated above $T_{amb}=25^\circ C$ in the proportion of $6mW/^\circ C$ for SA2003 and of $2.8 mW/^\circ C$ for SA2002S.






ELECTRICAL CHARACTERISTICS (Unless otherwise specified, $T_a=25^{\circ}\text{C}$, $V_{CC}=3\text{ V}$, F/E : $f=98\text{ MHz}$, $f_m=1\text{ kHz}$; FM IF : $f=10.7\text{ MHz}$, $\Delta f=\pm 22.5\text{ kHz}$, $f_m=1\text{ kHz}$; AM : $f=1\text{ MHz}$, $\text{MOD}=30\%$, $f_m=1\text{ kHz}$)

Characteristic		Symbol	Test Condition	Min.	Typ.	Max.	Unit
Supply Current		$I_{CC}(\text{FM})$	FM mode, $V_{in}=0$	--	10.5	16.5	mA
		$I_{CC}(\text{AM})$	AM mode, $V_{in}=0$	--	5.0	8.0	
F/E	Input Limiting Voltage	$V_{in}(\text{lim})$	-3dB limiting point	--	12	--	$\text{dB}\mu\text{V EMF}$
	Quiescent Sensitivity	QS	S/N=40dB	--	12	--	$\text{dB}\mu\text{V EMF}$
	Local OSC Voltage	V_{osc}	$f_{osc}=108\text{ MHz}$	160	240	320	mVrms
	Local OSC Stop Voltage	$V_{stop}(\text{FM})$	$V_{in}=0$	--	1.2	--	V
FM IF	Input Limiting Voltage	$V_{in}(\text{lim})\text{ IF}$	-3dB limiting point	42	47	52	$\text{dB}\mu\text{V EMF}$
	Recovered Output Voltage	V_{OD}	$V_{in}=80\text{ dB}\mu\text{V EMF}$	50	70	90	mVrms
	Signal to Noise Ratio	S/N	$V_{in}=80\text{ dB}\mu\text{V EMF}$	--	62	--	dB
	Total Harmonic Distortion	THD	$V_{in}=80\text{ dB}\mu\text{V EMF}$	--	0.4	--	%
	AM Rejection Ratio	AMR	$V_{in}=80\text{ dB}\mu\text{V EMF}$	--	33	--	dB
AM	Voltage Gain	GV	$V_{in}=27\text{ dB}\mu\text{V EMF}$	15	32	50	mVrms
	Recovered Output Voltage	V_{OD}	$V_{in}=60\text{ dB}\mu\text{V EMF}$	35	60	85	mVrms
	Signal to Noise Ratio	S/N	$V_{in}=60\text{ dB}\mu\text{V EMF}$	--	43	--	dB
	Total Harmonic Distortion	THD	$V_{in}=60\text{ dB}\mu\text{V EMF}$	--	1.0	--	%
	Local OSC Stop Voltage	$V_{stop}(\text{AM})$	$V_{in}=0$	--	1.6	--	V

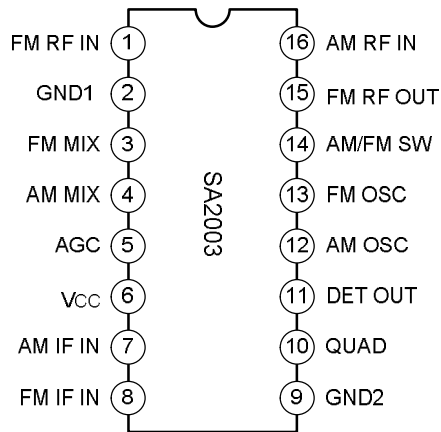PIN CONFIGURATION








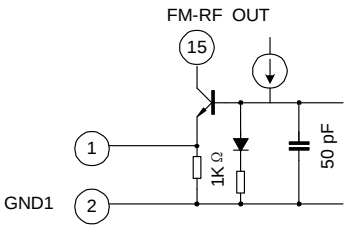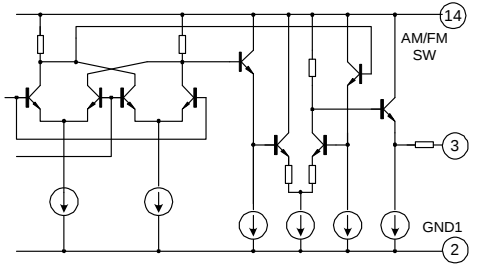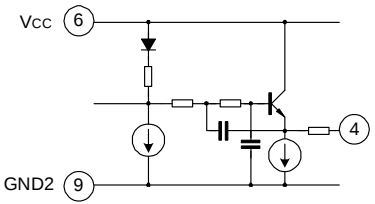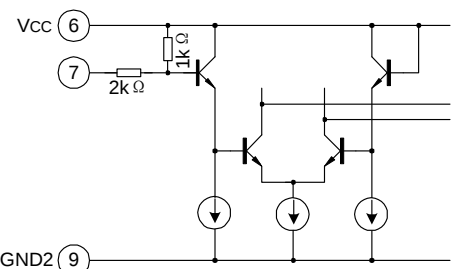PIN DESCRIPTION TERMINAL VOLTAGE : Typical DC voltage at Ta=25°C,VCC=3V and no signal with Test Circuit 1

Pin No.	Symbol	Internal Circuit	Terminal Voltage (V)	
			AM	FM
1	FM RF IN		0	0.7
2	GND1	-	0	0
3	FM MIX		0.4	1.7
4	AM MIX		0.6	0
5	AGC		0	0
6	VCC	-	3.0	3.0
7	AM IF IN		3.0	3.0



(TO be continued)

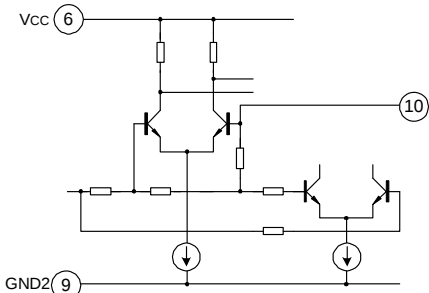(Continued)


Pin No.	Symbol	Internal Circuit	Terminal Voltage (V)	
			AM	FM
8	FM IF IN		3.0	3.0
9	GND2	-	0	0
10	QUAD		2.5	2.2
11	DET OUT		1.4	1.1
12	AM OSC		3.0	3.0
13	FM OSC		0.9	3.0

(TO be continued)

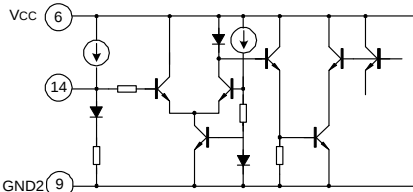
(Continued)

Pin No.	Symbol	Internal Circuit	Terminal Voltage (V)	
			AM	FM
14	AM/FM SW		0.9	3.0
15	FM RF OUT	Cf. PIN①	3.0	3.0
16	AM RF IN		3.0	3.0

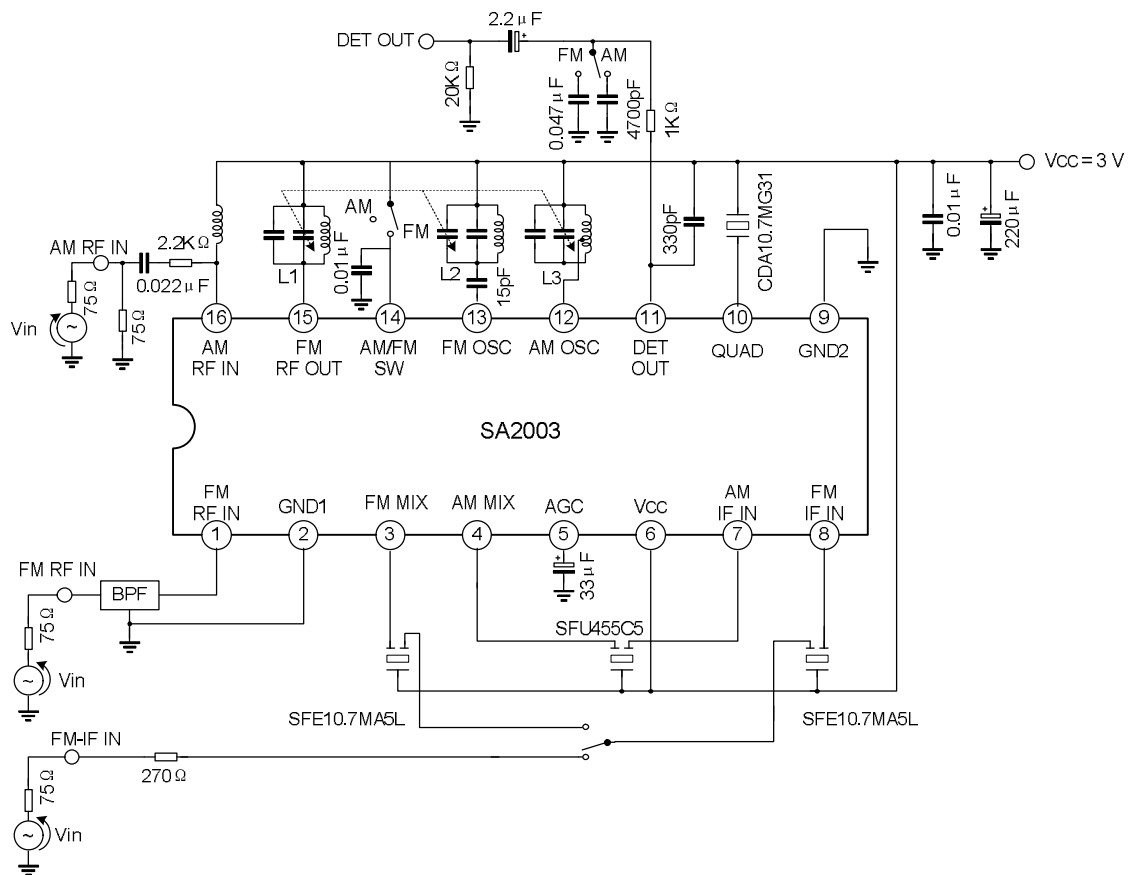TEST CIRCUIT 1




TEST CIRCUIT 2

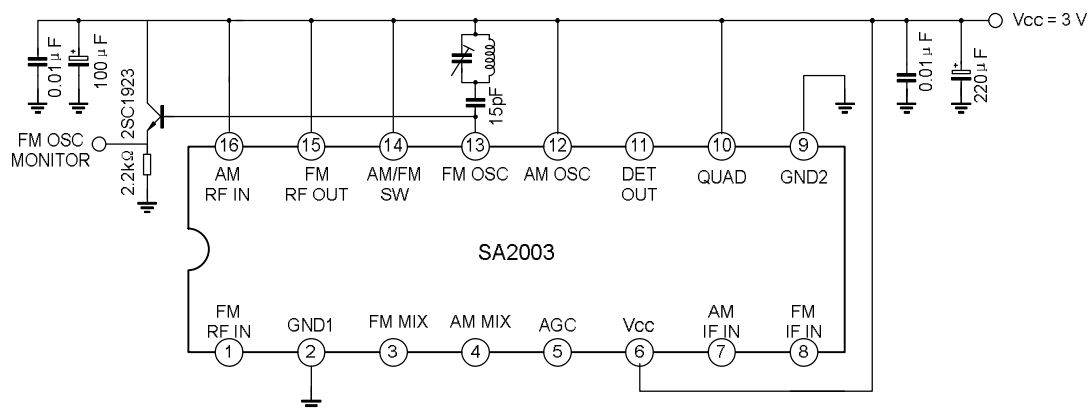

COIL DATA

Coil No.	Test Freq.	L (µH)	Co (pF)	Q ₀	Turns					Wire(mm)	Reference
					1-2	2-3	1-3	1-4	4-6		
L1 FM RF	100MHz	--	--	100	--	--	--	2 $\frac{1}{4}$	--	0.5 UEW	(s)0258-000-021
L2 FM OSC	100MHz	--	--	100	--	--	1 $\frac{3}{4}$	--	--	0.5 UEW	(s)0258-000-020
L3 AM OSC	796kHz	268	--	125	14	86	--	--	--	0.06 UEW	(s)2157-2239-213A

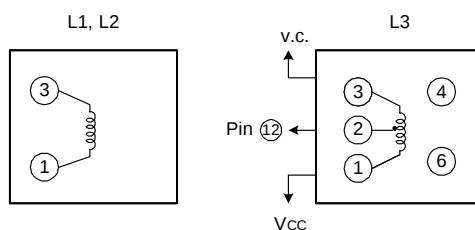
(s): Sumida electric co., ltd.



PACKAGE OUTLINE

DIP-16-300-2.54

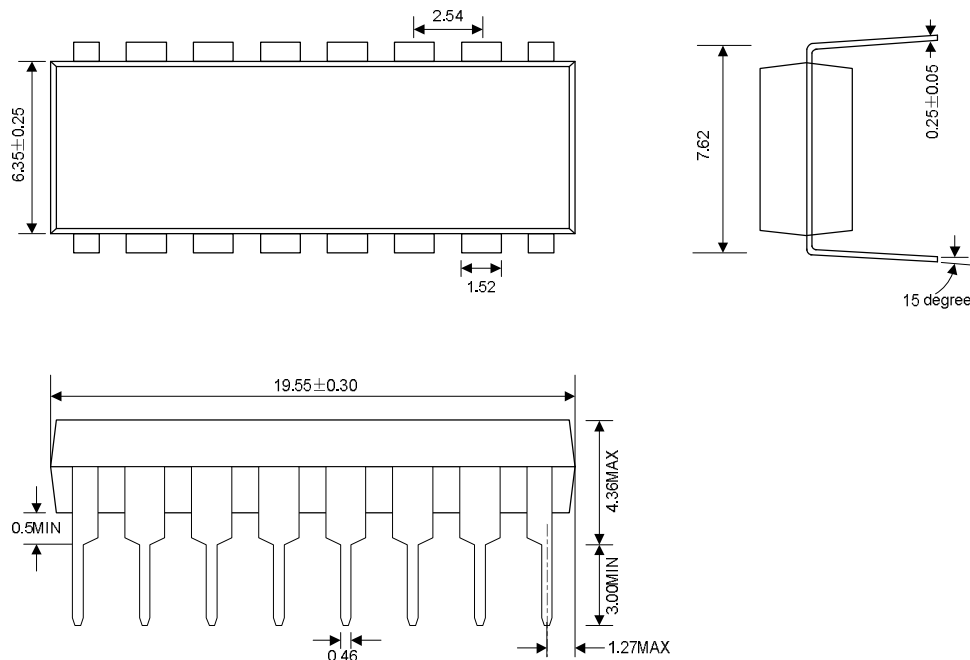UNIT: mm



SOP-16-225-1.27

UNIT: mm

