
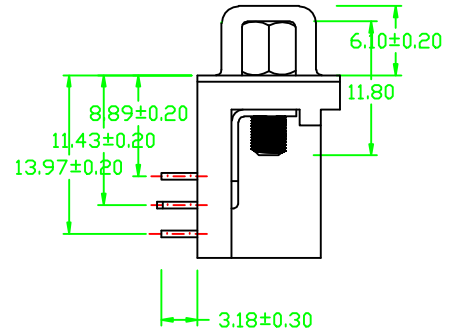
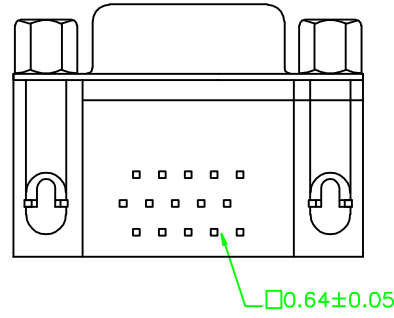
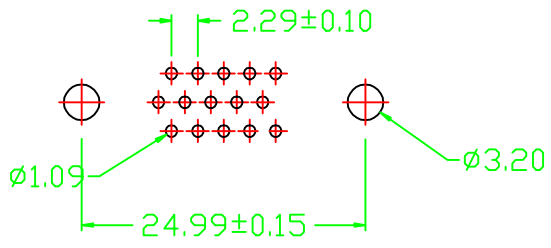


SIDE	DATE	DESCRIPTION	APPROVER
△			
△			

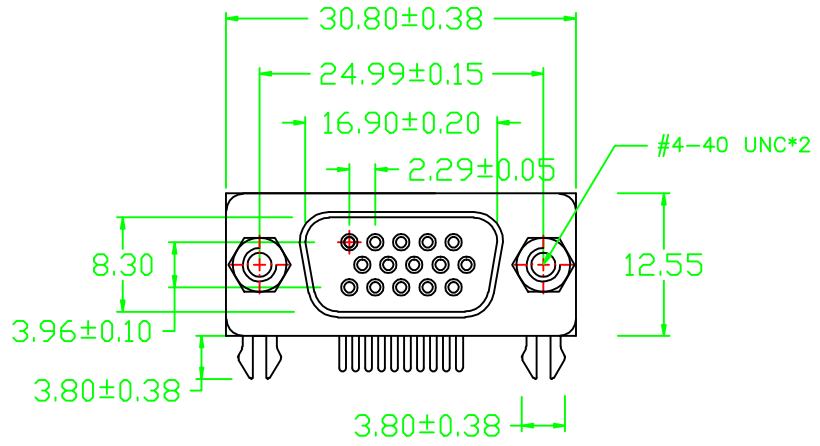

- MATERIAL:
- 1.Insulator:PBT+30%Glass Fiber (UL94V-0)
  - 2.Contact:Brass
  - 3.Contact Plated:Gold Flash over Tin Or Glod Plated Or Tin Plated
  - 4.Shell:Steel,Nickel Plated
- SPECIFICATION:
- 1.Current Rating:5 AMPS
  - 2.Insulation Resistance: 5000MΩ, MIN. At 500VDC
  - 3.Dielectric Strength: 500V for One minute
  - 4.Operation Temperature: -55° C~+105° C.

公差 (Tolerance)	公差						
	.0±0.25	.0'±1.0'					
传真 (fax)							
比例 (scale)	1 : 1	日期 (date)		单位 (units)	mm	图名 (name)	HDR15母叉锁
页次 (sheet)	A / 1	绘图 (draw)	陈	颜色 (shaded)		图号 (draw number)	
版次 (rev.)	A / 0	审核 (ch'k)	陈	材料 (mt'l)		料号 (Part number)	
视图 (view)		核准 (app'd)	陈	处理 (finish)	陈		