

HSF RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min


Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PPS/PBT

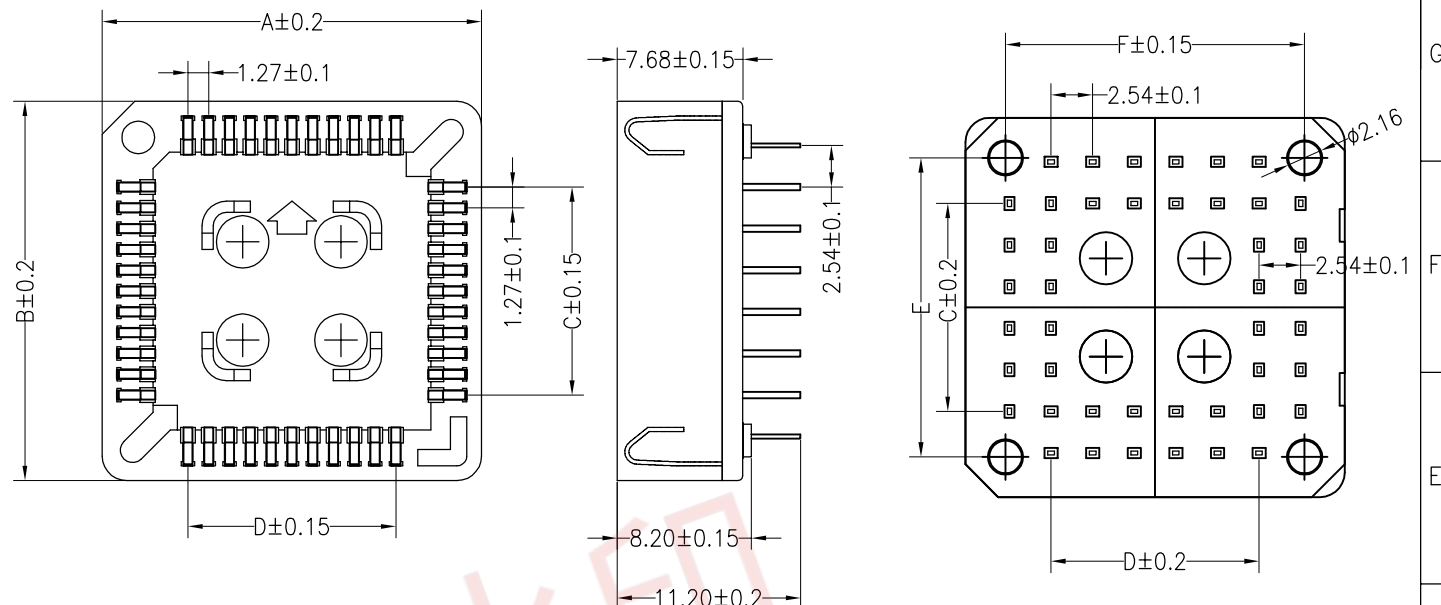


Ordering Information

7310 2 XX S SN X 01

No.of
Pins
20~84P

Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
S0:Gold Flash/Tin
SN:Tin

Color Type
A=Brown
B=Black
C=Coffee

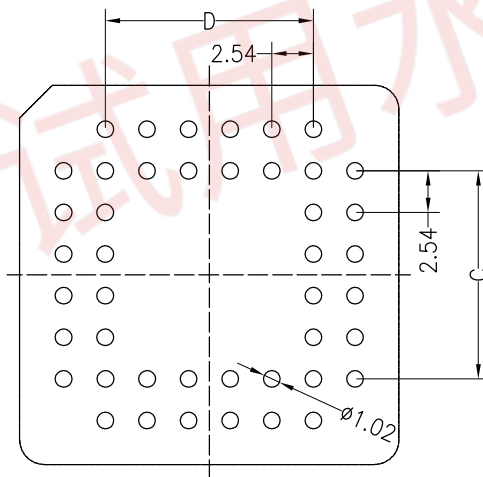

PCB LAYOUT

Position	A	B	C	D	E	F
20	15.60	15.60	5.08	5.08	10.00	10.00
28	18.09	18.09	7.62	7.62	12.90	12.90
32	18.04	20.60	7.62	10.16	15.40	12.90
44	23.10	23.10	12.70	12.70	18.00	18.00
52	25.70	25.70	15.24	15.24	20.50	20.50
68	30.80	30.80	20.32	20.32	25.75	25.75
84	35.95	35.95	25.40	25.40	30.90	30.90

				OPERATION		DRAW	yiyusheng	20.04.11	SCALE	FIT							
				X.X	±0.30				UNIT	mm							
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	73102XXSSNX01					
				X.XXX	±0.10				SHEET	1/1							
A	A0	2020.04.11	NEW DRAWING		Angle	±3°	APPROVE			PROJ.		TITLE:	2.54mm PLCC DIP Socket				
	REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL											
1		2		3		4		5		6		7		8		9	