			DATE:	
MESSRS.:				
AGENT:				
	SPECIFICATI	ON		
	OF PYROELECTRIC P			
	INFRARED SEN			
	DEL NO. RE46B			
PA	RT NO.	·		
PYROELECTRIC PASSIVE INFRARED SENSOR		PAGE	DRAWING NO.	REV:
IODEL NO. RE46B		1 / 6		A
		© NIPPON CERAMIC CO., LTD.		
ROVED BY	CHECKED BY		DRAWN BY	
	i			

## SCOPE

THIS SPECIFICATION DESCRIBES A PYROELECTRIC PASSIVE INFRARED SENSOR SUPPLIED BY NIPPON CERAMIC CO., LTD.

# TYPE OF SENSOR

BALANCED DIFFERENTIAL (SERIES OPPOSED TYPE.)

## PHYSICAL CONFIGURATION

1) PACKAGE : TO-5 METAL CAN WITH DIMENSIONS SHOWN IN FIGURE 1-C

(NICKEL-PLATED)

2) ELEMENT GEOMETRY : FOUR SENSITIVE AREAS 1.0 mm  $\times$  1.0 mm AND

SPACED 1.0 mm APART.

3) ELEMENT ORIENTATION : SEE FIGURE 1-B

4) LEAD CONFIGURATION : SEE FIGURE 1-C, 1-D

# ELECTRICAL CHARACTERISTICS (AT $25\pm5$ °C)

1) CIRCUIT CONFIGURATION: THREE-TERMINAL SENSOR WITH SOURCE FOLLOWER

SEE FIGURE 2

2) OPERATING VOLTAGE : 3  $\sim$  10 V DC (Rs: 47K  $\Omega$ )

3) ELEMENT POLARITY : ELEMENT A, C: (+) B, D: (-) OR A, C: (-) B, D: (+)

4) SOURCE VOLTAGE : 0.35  $\sim$  1.4 V (VD: 5V, Rs: 47K $\Omega$ )

5) SIGNAL OUTPUT : MIN. 4.0 Vp-p (TYP. 5.5 Vp-p)

(S1, S2)

SIGNAL OUTPUT IS MEASURED AT CHOPPER FREQUENCY OF 1 Hz WHEN CONNECTED TO THE AMPLIFIER OF GAIN 72.5 dB (AT 1 Hz) AND SUBMITTED TO THE EMISSION OF INFRARED ENERGY OF 13  $\mu$  W/cm² FROM 420 K BLACK BODY.

SEE FIGURE 3

6) NOISE OUTPUT : MAX. 200 mVp-p (TYP. 110 mVp-p)

NOISE OUTPUT SHALL BE MEASURED FOR 20 SECONDS WHEN CONNECTED TO THE AMPLIFIER OF GAIN 72.5 dB AND SHUT OUT FROM INFRARED ENERGY. SEE FIGURE 3

MODEL NO. : RE46B	PAGE 2 / 6	DRAWING NO.	REV :
PART NO. :	NIPPON CERAMIC CO., LTD.		

7) BALANCE OUTPUT : MAX. 15 %

 $[ | S1-S2 | / | S1+S2 | ] \le 0.15$ 

S1 : SIGNAL OUTPUT ON ELEMENT A + C S2 : SIGNAL OUTPUT ON ELEMENT B + D

BALANCE OUTPUT IS MEASURED AT CHOPPER FREQUENCY OF 1 Hz WHEN CONNECTED TO THE AMPLIFIER OF GAIN 72.5 dB (AT 1 Hz) AND SUBMITTED TO THE EMISSION OF INFRARED ENERGY OF 13 u W/cm2 FROM 420 K BLACK BODY. SEE FIGURE 3

8) FREQUENCY RESPONSE : 0.3 Hz TO 3.0 Hz /  $\pm$  10 dB

## OPTICAL CHARACTERISTICS

1) FIELD OF VIEW : 132° FROM CENTER OF ELEMENT ON AXIS X, Y

: 146° FROM CENTER OF ELEMENT ON 45°

: SEE FIGURE 1-A

2) FILTER SUBSTRATE : SILICON

3) CUT ON (5 %T ABS) : 5.0  $\pm$  0.5  $\mu$  m

4) TRANSMISSION :  $\geq$  70 % AVERAGE 7 $\sim$ 14  $\mu$  m

### ENVIRONMENTAL REQUIREMENTS

1) OPERATING TEMPERATURE : -30 ℃ TO +70 ℃

2) STORAGE TEMPERATURE : -40 °C TO +80 °C


3) RELATIVE HUMIDITY :

THE SENSOR SHALL OPERATE WITHOUT INCREASE IN NOISE OUTPUT WHEN EXPOSED TO 90  $\sim$  95 % RH AT 30  $^{\circ}$ C CONTINUOUSLY.


4) HERMETIC SEAL

THE SENSOR SHALL BE SEALED TO WITHSTAND A VACUUM OF 21.28 kPa.

REV: PAGE DRAWING NO. 3 / 6 MODEL NO. : RE46B PART NO. : NIPPON CERAMIC CO., LTD.

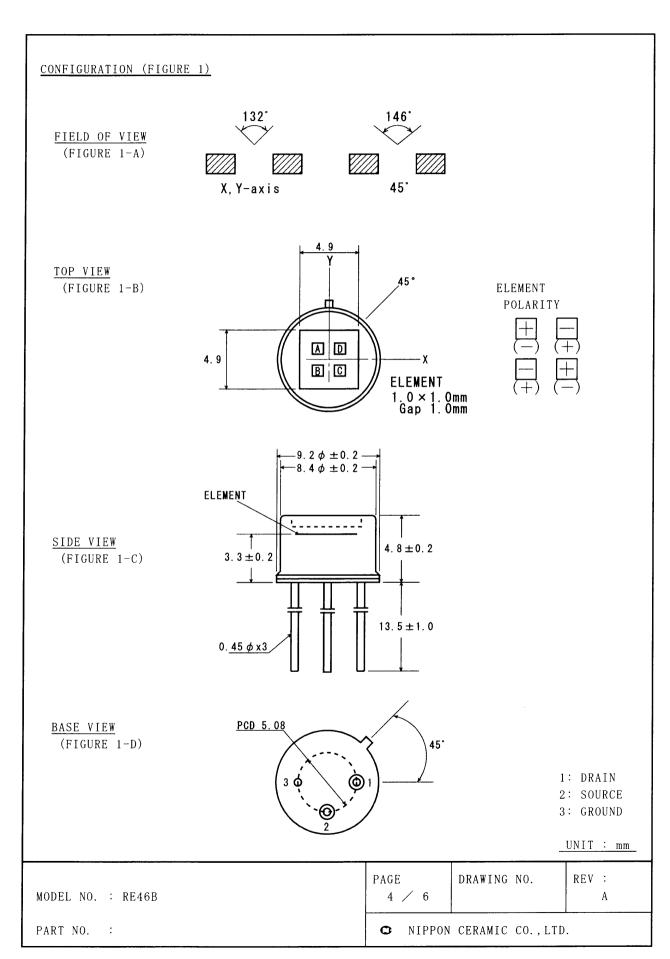



# CIRCUIT CONFIGURATION (FIGURE 2)

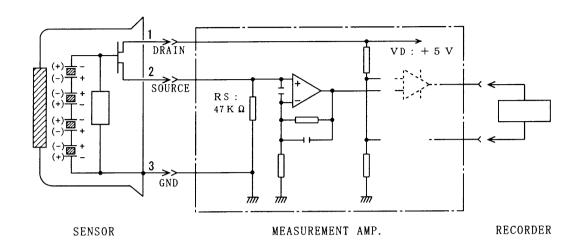

 $\divideontimes$  MEASUREMENT AMP.: NON-INVERTED TYPE, GAIN 72.5 dB AT 1 Hz 0.4 $\sim$ 2.7 Hz/-3 dB

# TEST SET-UP BLOCK DIAGRAM (FIGURE 3)

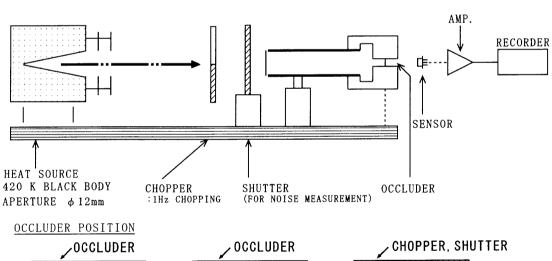

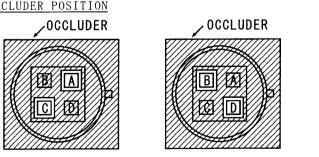

SIGNAL OUTPUT 1 (S1) SIGNAL OUTPUT 2 (S2) NOISE OUTPUT

PAGE DRAWING NO. REV:

5 / 6 A

PART NO.:

NIPPON CERAMIC CO., LTD.

### 

### 1. DESIGN RESTRICTIONS/PRECAUTIONS

IF USED FOR OUTDOOR APPLICATIONS, BE SURE TO APPLY SUITABLE SUPPLEMENTARY OPTICAL FILTER AND DRIP-PROOF, ANTI-DEW CONSTRUCTION. THIS SENSOR IS DESIGNED FOR INDOOR USE

IN CASES WHERE SECONDARY ACCIDENTS DUE TO OPERATION FAILURE OR MALFUNCTIONS CAN BE ANTICIPATED, ADD A FAIL SAFE FUNCTION TO THE DESIGN.

### 2. USAGE RESTRICTIONS/PRECAUTIONS

TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL FAILURE OR ANY DETERIORATION OF ITS CHARACTERISTICS, DO NOT USE THIS SENSOR IN THE FOLLOWING, OR SIMILAR, CONDITIONS.

- A. IN RAPID ENVIRONMENTAL TEMPERATURE CHANGES.
- B. IN STRONG SHOCK OR VIBRATION.
- C. IN A PLACE WHERE THERE ARE OBSTRUCTING MATERIALS (GLASS, FOG, ETC.) THROUGH WHICH INFRARED RAYS CANNOT PASS WITHIN DETECTION AREA.
- D. IN FLUID, CORROSIVE GASES AND SEA BREEZE.
- E. CONTINUAL USE IN HIGH HUMIDITY ATMOSPHERE.
- F. EXPOSED TO DIRECT SUN LIGHT OR HEADLIGHTS OF AUTOMOBILES.
- G. EXPOSED TO DIRECT WIND FROM A HEATER OR AIR CONDITIONER.

## 3. ASSEMBLY RESTRICTIONS/PRECAUTIONS

SOLDERING -----

- A. USE SOLDERING IRONS WHEN SOLDERING.
- B. AVOID KEEPING PINS OF THIS SENSOR HOT FOR A LONG TIME AS EXCESSIVE HEAT MAY CAUSE DETERIORATION OF ITS QUALITY. (E. G. WITHIN 5 SEC. AT 350  $^{\circ}\mathrm{C}$  )

WASHING -----

- A. BE SURE TO WASH OUT ALL FLUX AFTER SOLDERING AS REMAINDER MAY CAUSE MALFUNCTIONS.
- B. USE A BRUSH WHEN WASHING. WASHING WITH AN ULTRASONIC CLEANER MAY CAUSE OPERATIONAL FAILURE.

### 4. HANDLING AND STORAGE RESTRICTIONS / PRECAUTIONS

TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL FAILURE, APPEARANCE DAMAGE OR ANY DETERIORATION OF ITS CHARACTERISTICS, DO NOT EXPOSE THIS SENSOR TO THE FOLLOWING OR SIMILAR, HANDLING AND STORAGE CONDITIONS.

- A. VIBRATION FOR A LONG TIME.
- B. STRONG SHOCK.
- C. STATIC ELECTRICITY OR STRONG ELECTROMAGNETIC WAVES.
- D. HIGH TEMPERATURE AND HUMIDITY FOR A LONG TIME.
- E. CORROSIVE GASES OR SEA BREEZE.
- F. DIRTY AND DUSTY ENVIRONMENTS THAT MAY CONTAMINATE THE OPTICAL WINDOW.

SENSOR TROUBLES RESULTING FROM MISUSE, INAPPROPRIATE HANDLING OR STORAGE ARE NOT THE MANUFACTURER'S RESPONSIBILITY.

MODEL NO. : RE46B	PAGE 6 / 6	DRAWING NO.	REV :	
PART NO. :	C NIPPON	ON CERAMIC CO., LTD.		