


REV.	Q'TY	ECN. NO.	APR.	DATE
B	1	RD-EN-09-140	Jason	2009.04.10
C	1	RD-EN-11-506	Jave	2011.06.13
D	-	RD-EN-11-941		

- NOTES:
- MATERIAL:
HOUSING:THERMOPLASTIC,UL 94V-0,30%G/F FILLED;
COLOR:BLACK
CONTACT:COPPER ALLOY T=0.15mm
DETECT PIN:COPPER ALLOY T=0.15mm
SHIELDED:STAINLESS STEEL T=0.20mm
 - FINISH:
CONTACT: GOLD FLASH OR 15u" GOLD PLATING ON CONTACT AREA
Tin 100u"MIN PLATING ON SOLDER TAILS
50u" MIN.NICKEL UNDERPLATING OVER ALL
DETECT PIN: GOLD FLASH PLATING ON CONTACT AREA
Tin 100u"MIN PLATING ON SOLDER TAILS
50u" MIN.NICKEL UNDERPLATING OVER ALL
SHIELDED: GOLD FLASH PLATING ON SOLDER TAILS
50u" MIN.NICKEL UNDERPLATING OVER ALL
 - PRODUCT SPECIFICATIONS:
VOLTAGE RATING: 100V
CURRENT RATING: 0.5A
INSULATION RESISTANCE: 1000 MEG.OHM MIN
CONTACT RESISTANCE: 100 MILL.OHM MAX
DETECT PIN RESISTANCE: 200 MILL.OHM MAX
OPERATION TEMPERATURE: -20° TO +85°
DURABILITY: 5000 CYCLES
 - PART NO:

CAF11-08XX3-XX07

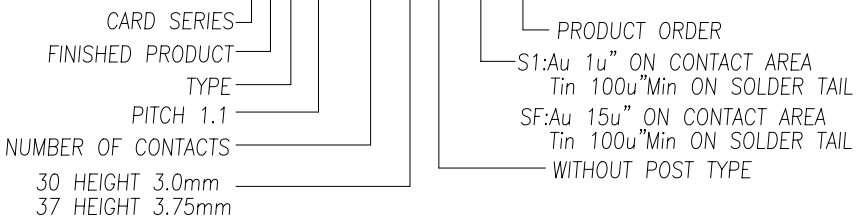


RECOMMENDED P.C.B LAYOUT
GENERAL TOLERANCE ±0.05

3.75H	CAF11-08373-XX07	3.75	2.60
3.0H	CAF11-08303-XX07	3.0	1.85
TYPE	PART NO.	DIM.A	DIM.B

Pin No.	NAME	TYPE	DESCRIPTION
1	DAT 2	I/O/PP	Date Line(bit2)
2	CD/DAT 3	I/O/PP	Card Detect/Date Line(bit3)
3	CMD	PP	Command Response
4	VDD	S	Supply Voltage
5	CLK	I	Colck
6	VSS	S	Supply Voltage Ground
7	DAT0	I/O/PP	Date Line(bit0)
8	DAT1	I/O/PP	Date Line(bit1)

DIMENSION IN mm		TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE: T-FLASH CARD CONN. (SIMPLE SWITCH TYPE)	
.X±0.35	X.*± 5°	APR.		DWC NO. CAF11-08303-SF07	
.XX±0.25	.X*± 3°	CHK.		PROJ. CUSTOMER DRAWING	
.XXX±0.15	.XX*± 1°	DRA. Reader Lei	2011.12.10	SIZE A4	SCALE 3:1
		SHEET	1/2	REV.	D

LCN Shenzhen Linkconn Electronics Co.,Ltd.

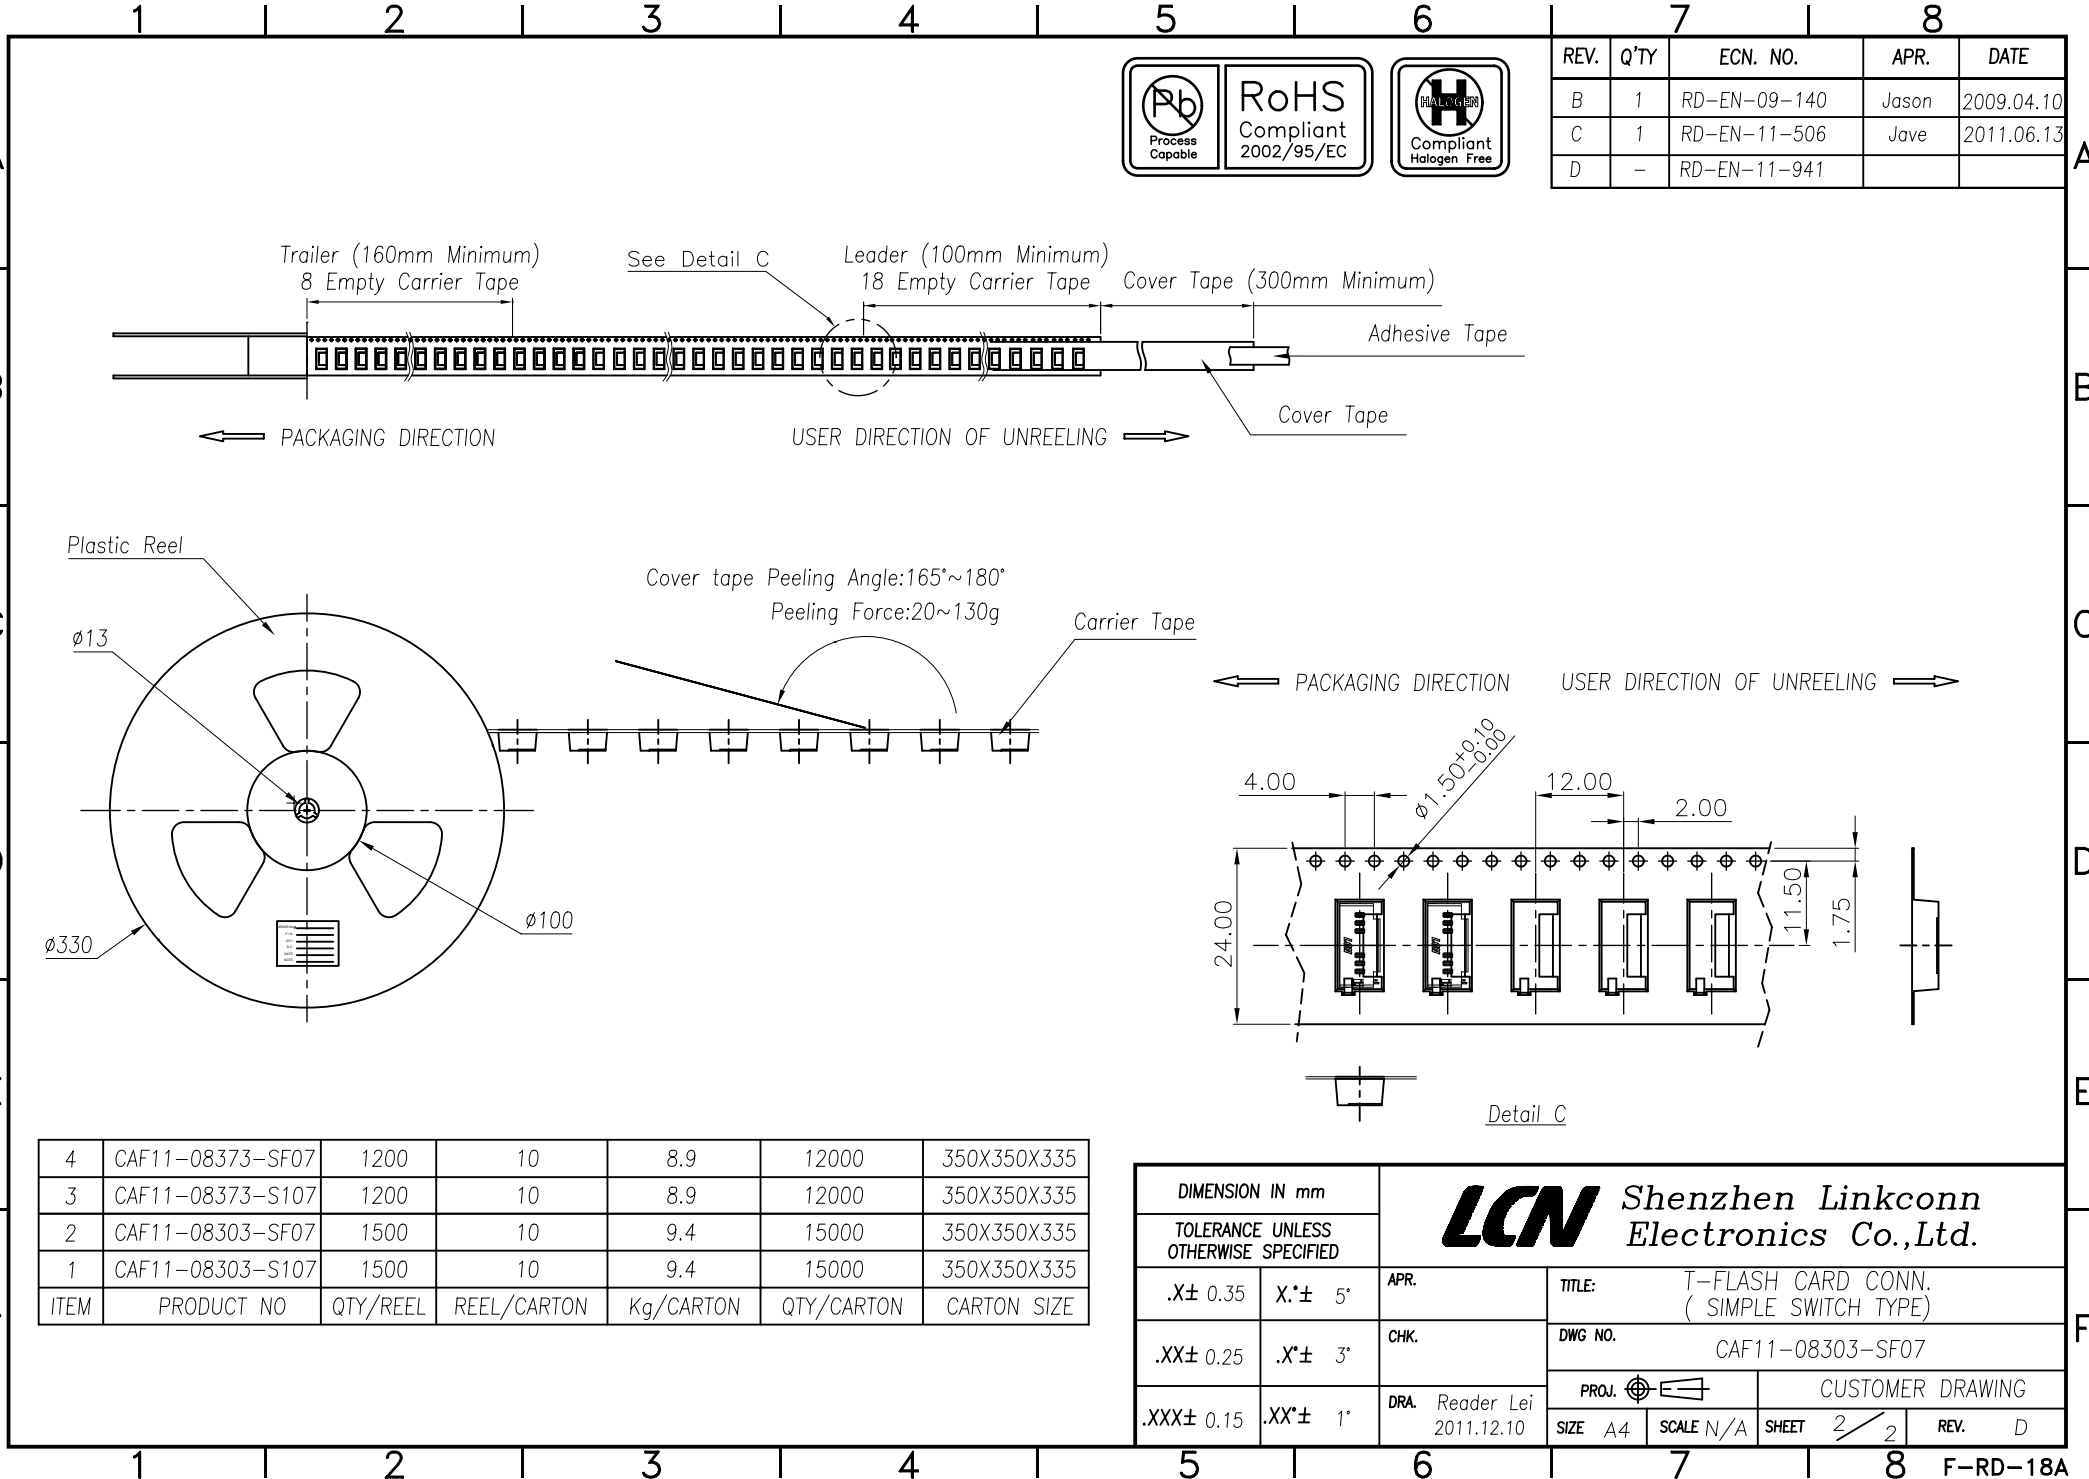

REV.	Q'TY	ECN. NO.	APR.	DATE
B	1	RD-EN-09-140	Jason	2009.04.10
C	1	RD-EN-11-506	Jave	2011.06.13
D	-	RD-EN-11-941		

4	CAF11-08373-SF07	1200	10	8.9	12000	350X350X335
3	CAF11-08373-S107	1200	10	8.9	12000	350X350X335
2	CAF11-08303-SF07	1500	10	9.4	15000	350X350X335
1	CAF11-08303-S107	1500	10	9.4	15000	350X350X335
ITEM	PRODUCT NO	QTY/REEL	REEL/CARTON	Kg/CARTON	QTY/CARTON	CARTON SIZE

DIMENSION IN mm		TOLERANCE UNLESS OTHERWISE SPECIFIED			
.X± 0.35	X.*± 5°	APR.	TITLE:	T-FLASH CARD CONN. (SIMPLE SWITCH TYPE)	
.XX± 0.25	.X.*± 3°	CHK.	DWG NO.	CAF11-08303-SF07	
.XXX± 0.15	.XX.*± 1°	DRA. Reader Lei 2011.12.10	PROJ.	CUSTOMER DRAWING	
		SIZE A4	SCALE N/A	SHEET 2/2	REV. D